

1.3 GHz and 4 GHz Multiplexers

NI SCXI-1190, NI PXI-2590, NI SCXI-1191, NI PXI-2591

- 4x1 unterminated multiplexer
- 50 characteristic impedance
- High-bandwidth electromechanical relays
- Excellent insertion loss, VSWR, and isolation specifications
- Fully software programmable

SCXI-1190 (quad 4x1), PXI-2590 (single 4x1)

- 1.3 GHz bandwidth
- SMB direct connectivity
- 1 A at 24 VDC capacity

SCXI-1191 (quad 4x1), PXI-2591 (single 4x1)

- 4 GHz bandwidth
- SMA direct connectivity
- 330 mA at 30 VDC capacity

Operating Systems

- Windows 2000/NT/XP

Recommended Software

- LabVIEW
- LabVIEW Real-Time Module (PXI Modules only)
- LabWindows/CVI
- Measurement Studio
- NI Switch Executive

Other Compatible Software

- Visual Basic
- C/C++

Driver Software (included)

- NI-SWITCH

Compliance

- CE



Overview

The National Instruments PXI-2590 and PXI-2591 are 4x1 high-frequency unterminated multiplexing switches. The NI SCXI-1190 and NI SCXI-1191 perform the same functions as the PXI-2590 and PXI-2591 but also offer a quad 4x1 multiplexing configuration. The switches are capable of switching signals from DC to 1.3 GHz (SCXI-1190 and PXI-2590) and DC to 4 GHz (SCXI-1191 and PXI-2591). The characteristic impedance of the channels is 50 Ω .

For the SCXI-1190 and the PXI-2590, the maximum voltage rating of the switches is 24 V_{rms} with a maximum current of 1 A. For the SCXI-1191 and the PXI-2591, the maximum voltage rating is 30 V_{rms} with a maximum current of 330 mA. All are well suited for applications that require the routing of high-frequency signals inside automated test equipment (ATE) systems because they can switch signals with a very low insertion loss. In addition, the excellent voltage standing-wave ratio (VSWR) and isolation parameters make these modules the perfect choice in a system geared to high-frequency applications as shown in Table 1.

Extended Features and Specifications

National Instruments switch modules are built with a number of core features that are covered in detail in the Switch Overview section.

For additional information about the PXI-2590, PXI-2591, SCXI-1190, and SCXI-1191, including software, certifications and compliance, relay control, etc., please see page 20. For detailed specifications, please see page 504.

Ordering Information

NI SCXI-1190	776572-90
NI PXI-2590	777987-01
NI SCXI-1191	776572-91
NI PXI-2591	778339-01

Includes switch module and NI-SWITCH driver software.

For information on extended warranty and value added services, see page 20.

See page 499 for accessory and cable information.

BUY ONLINE!


Visit ni.com/products and enter *pxi2590*, *pxi2591*, *scxi1190*, and/or *scxi1191*.

Module	Insertion Loss	VSWR
SCXI-1190, PXI-2590 (@ 1.3 GHz)	< 1.5 dB	< 1.5
SCXI-1190, PXI-2590 (@ 2 GHz)	< 3 dB	< 2.5
SCXI-1191, PXI-2591 (@ 4 GHz)	< 0.9 dB	< 1.5

Table 1. Parameters of High-Frequency Switching Modules

Switch Specifications

Specifications (continued)

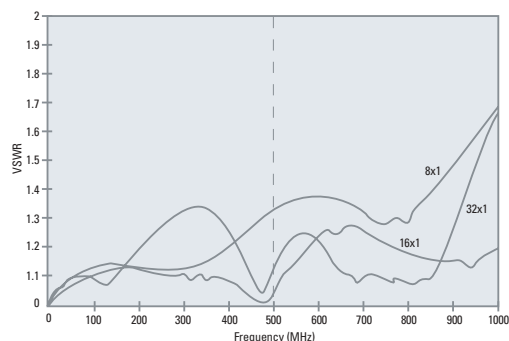

Input Characteristics

Maximum switching voltage.....	150 V, CAT I
Maximum switching current.....	0.5 A (per channel)
Maximum carry current.....	1 A (per channel)
Simultaneous channels at maximum current	
PXI-2593	2, maximum
SCXI-1193	4, maximum
DC path resistance	
Initial	<1.0 Ω
End of life	≥2.0 Ω

Dynamic Characteristics

Maximum scan rate	100 operations/s
Expected relay life:	
Mechanical	5x10 ⁷ operations
Electrical	3x10 ⁵ operations (30 V, 0.3 ADC resistive)

Physical Characteristics

Relay type.....	Electromechanical, latching
Relay contact material	Silver palladium and gold
Dimensions	
PXI-2593.....	10 by 16 by 4 cm (3.9 by 6.3 by 1.6 in.)
SCXI-1193	3.0 by 17.3 by 19.6 cm (1.2 by 6.7 by 7.6 in.)
I/O connectors	
PXI-2593.....	18 MCX jacks
SCXI-1193	36 MCX jacks
Trigger connectors.....	2 SMB jacks

Environment

Operating temperature.....	0 to 50 °C
Storage temperature.....	- 20 to 70 °C
Relative humidity	5 to 85% noncondensing
Pollution degree	2
Approved altitudes	Up to 2,000 m

Safety

This product is designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 3111-1, UL 61010B-1
- CAN/CSA C22.2 No. 1010.1

CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE Marking, as follows:

Low-voltage Directive (safety)	73/23/EEC
Electromagnetic Compatibility	
Directive (EMC).....	89/336/EEC

SCXI-1190, PXI-2590

Input Characteristics

Number of channels per bank.....	4
Number of banks	
SCXI-1190	4
PXI-2590	1
Input voltage	
Channel-to-earth.....	24 VDC
Maximum switching voltage	
AC	24 V _{rms}
DC	24 VDC
Maximum switching capacity per channel	
AC	1 A _{rms} at 24 V _{rms}
DC	1 A at 24 VDC
Maximum switching power per channel	24 W
Contact resistance (initial)	100 mΩ maximum
Contact material.....	Gold-clad silver

RF Performance Characteristics

Characteristic impedance (Z ₀).....	50 Ω
Insertion loss	
100 MHz	<0.4 dB
500 MHz	<0.9 dB
1.3 GHz	<1.5 dB
2 GHz	<3 dB
VSWR	
100 MHz	<1.15
500 MHz	<1.35
1.3 GHz	<1.5
2 GHz	<2.5
Isolation	
500 MHz	>60 dB
1.3 GHz	>50 dB
2 GHz	>30 dB
Rise time	<300 ps
Signal delay.....	<3 ns
Maximum RF carry power at 900 MHz.....	10 W

Dynamic Characteristics

Relay operate time (at 20 °C)	
Typical	15 ms
Relay release time (at 20 °C)	
Typical.....	15 ms
Expected life	
Mechanical (no load).....	5x10 ⁶ operations
Electrical at maximum switching capacity	10 ⁵ operations
Caution: Exceeding the maximum switching capability decreases expected life.	

Power Requirement

+5 VDC	600 mA maximum (all relays closed)
--------------	------------------------------------

Physical

Dimensions	
SCXI-1190	17.3 by 19.6 by 3.0 cm (6.81 by 7.70 by 1.19 in.)
PXI-2590	10 by 16 by 4 cm (3.9 by 6.3 by 1.6 in.)
I/O connectors.....	5 SMB female per bank

Environment

Operating temperature.....	0 to 50 °C
Storage temperature.....	- 20 to 70 °C
Relative humidity	5 to 85% noncondensing
Pollution degree	2
Approved altitudes	Up to 2,000 m

Switch Specifications

Specifications (continued)

SCXI-1191, PXI-2591

Input Characteristics

Number of channels per bank	4
Number of banks	4
SCXI-1191	4
PXI-2591	1
Input voltage	
Channel-to-ground	30 V _{rms} /VDC
Maximum switching voltage	
AC	30 V _{rms}
DC	30 VDC
Maximum switching capacity per channel	
AC	0.33 A at 30 V _{rms}
DC	0.33 A at 30 VDC
Maximum switching power per channel	10 W
Contact on resistance (initial)	200 mΩ maximum
Contact material	Gold

RF Performance Characteristics

Characteristic impedance (Z ₀)	50 Ω
Insertion loss	
2.5 GHz	<0.6 dB
4 GHz	<0.9 dB
VSWR	
2.5 GHz	<1.3
4 GHz	<1.5
Isolation	
2.5 GHz	>60 dB
4 GHz	>55 dB
Maximum RF carry power at 900 MHz	10 W

Dynamic Characteristics

Relay operate time (at 20 °C)	
Typical	15 ms
Relay release time (at 20 °C)	
Typical	15 ms
Expected life	
Mechanical (no load)	5x10 ⁶ operations
Electrical (maximum switching capacity) ..	10 ⁹ operations

Caution: Exceeding the maximum switching capability decreases expected life.

Power Requirement

+5 VDC	950 mW maximum (all relays closed)
--------------	------------------------------------

Physical

Dimensions	
SCXI-1191	17.3 by 19.6 by 3.0 cm (6.81 by 7.70 by 1.19 in.)
PXI-2591	10 by 16 by 4 cm (3.9 by 6.3 by 1.6 in.)
I/O connector	5 SMA female per bank

Environment

Operating temperature	0 to 50 °C
Storage temperature	-20 to 70 °C
Relative humidity	5 to 85% noncondensing

SCXI-1192

Input Characteristics

Number of relays	8 SPDT (latching)
Input voltage	
Channel-to-ground	30 V _{rms} /VDC
Maximum switching voltage	30 VDC
Maximum carry current per channel	2 ADC
Maximum continuous carry power per channel	
1 to 3 GHz	120 W
3 to 8 GHz	80 W
8 to 12.4 GHz	60 W
12.4 to 18 GHz	50 W

The total input power for all relays combined should not exceed the preceding specifications. When using multiple relays, refer to table below for adjusted maximum input power

Active Relays	1 to 3 GHz	3 to 8 GHz	8 to 12.4 GHz	12.4 to 18 GHz
1	120 W	80 W	60 W	50 W
2	60 W	40 W	30 W	25 W
4	30 W	20 W	15 W	12.5 W
8	15 W	10 W	7.5 W	6.25 W

Contact resistance (initial)	100 mΩ maximum
Contact material	Gold plate

RF Performance Characteristics

Characteristic impedance (Z ₀)	50 Ω
Insertion loss at:	
≤4 GHz	≤0.2 dB
4 to 8 GHz	≤0.3 dB
8 to 12.4 GHz	≤0.4 dB
12.4 GHz to 18 GHz	≤0.5 dB
VSWR at:	
≤1 GHz	≤1.1
1 to 4 GHz	≤1.15
4 to 8 GHz	≤1.25
8 to 12.4 GHz	≤1.35
12.4 to 18 GHz	≤1.5

Isolation:	
≤1 GHz	≥85 dB
1 to 4 GHz	≥80 dB
4 to 8 GHz	≥70 dB
8 to 12.4 GHz	≥65 dB
12.4 to 18 GHz	≥60 dB

Dynamic Characteristics

Relay operate time (at 20 °C)	
Typical	15 ms
Relay release time (at 20 °C)	
Typical	15 ms
Expected life	
Mechanical (no load)	5x10 ⁶ operations
Electrical at 5 W	5x10 ⁶ operations (to 3 GHz, 50 Ω, VSWR maximum 1.2)

Caution: Exceeding these electrical parameters decreases expected life.

Power Requirement

+5 VDC	800 mA, maximum
--------------	-----------------

Physical

Dimensions	17.3 by 19.6 by 3.0 cm (6.81 by 7.70 by 1.19 in.)
I/O connector	24 SMA female

Environment

Operating temperature	0 to 50 °C
Storage temperature	-20 to 70 °C
Relative humidity	5 to 85% noncondensing

SCXI-1163R

Input Characteristics

Number of relays	32 organized as 8 optically isolated banks of 4 relays each
Relay type	Normally open (Form A), solid-state relays
Maximum switching voltage	
AC	240 VAC
DC	240 VDC
Maximum switching capacity	200 mA
Commonmode isolation	250 V _{rms} between banks, and bank to ground
On-resistance	8 Ω
Output capacitance	110 pF at 50 V, 1 MHz
Leakage current	1 μA maximum
Transfer rate in serial mode ¹	
(1 word = 32 bits)	750 words/s
Relay set time	0.6 ms
Relay reset time	0.1 ms
Power-on state	Relays open