

2.53 GHz Dual-Core Embedded Controller for PXI

NI PXI-8108 *NEW!*

- Intel Core 2 Duo T9400 processor (2.53 GHz dual core)
 - 1 GB (1 x 1 GB DIMM) dual-channel 800 MHz DDR2 RAM standard, 4 GB (1 x 4 GB DIMM) maximum
 - Up to 25 percent faster than the PXI-8106
 - Up to 132 MB/s system and slot bandwidth
 - 10/100/1000BASE-TX Ethernet
 - Integrated hard drive
 - 4 Hi-Speed USB ports
 - ExpressCard/34 slot
 - DVI-I video connector
 - IEEE 1284 ECP/EPP parallel port
 - GPIB (IEEE 488) controller
 - RS232 serial port
 - Internal PXI trigger bus routing
 - Watchdog timer
- Software**
- OS and drivers already installed
 - Hard-drive-based image recovery
- PXI System Configuration**
- Complete PXI system configuration at ni.com/pxiadvisor



Overview

The NI PXI-8108 is a high-performance Intel Core 2 Duo T9400-based embedded controller for use in PXI and CompactPCI systems. With its 2.53 GHz dual-core processor and dual-channel 800 MHz DDR2 memory, the PXI-8108 is ideal for applications requiring intensive analysis or system development. A PXI-8108 embedded controller in a PXI chassis offers a compact, high-performance PC platform for modular instrumentation and data acquisition applications.

CPU	Intel Celeron 575 Processor (2.0 GHz single core)
Front-side bus	1066 MHz
L2 cache	6 MB shared
Dual-channel 800 MHz DDR2 RAM, standard	1 GB (1 x 1 GB)
Dual-channel 800 MHz DDR2 RAM, maximum	4 GB (1 x 4 GB)
Hard drive, minimum	80 GB SATA ¹
10/100/1000BASE-TX (Gigabit) Ethernet	✓
GPIB (IEEE 488) controller	✓
Serial port (RS232)	✓
Parallel port	✓
Hi-Speed USB ports	4
ExpressCard/34 slot	✓
Watchdog/trigger SMB	✓
Installed OS	Windows Vista Business, Windows Vista Business (downgraded to Windows XP Professional) ²

¹80 GB SATA hard drive for extended temperature, 24/7 operation option.

²Contact National Instruments or visit ni.com/pxiadvisor for information on other available operating systems.

Table 1. NI PXI-8108 Features

Dual-Core Processor

The PXI-8108 includes the dual-core Intel Core 2 Duo T9400 processor. Dual-core processors contain two cores, or computing engines, in one physical package. They can simultaneously execute two computing tasks, which is advantageous in multitasking environments like Windows Vista or Windows XP, where multiple applications run simultaneously. Two applications, such as NI LabVIEW and Microsoft Excel, can each execute on a separate core at the same time, which improves overall system performance. Multithreaded applications, such as LabVIEW, take full advantage of dual-core processors because they automatically separate their tasks into independent threads. A dual-core processor can simultaneously execute two of these threads. Figure 1 compares the SYSmark 2004 overall performance of the PXI-8108 controller with other PXI embedded controllers.

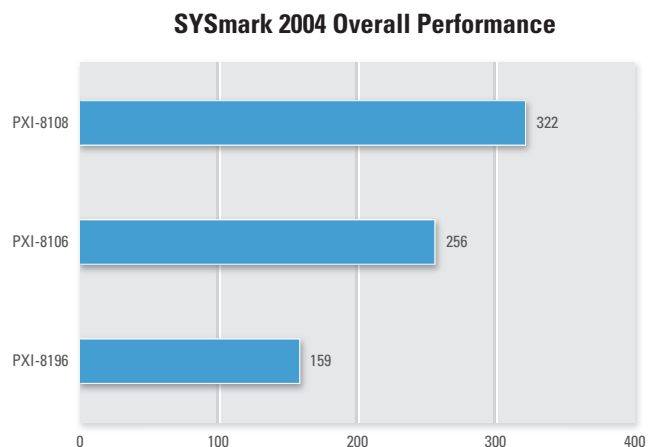


Figure 1. Embedded Controller Benchmarks

2.53 GHz Dual-Core Embedded Controller for PXI

Hardware

With state-of-the-art packaging, the PXI-8108 integrates the Intel Core 2 Duo T9400 processor and all standard and extended PC I/O ports into a single unit. By integrating many I/O ports on the controller, all active slots in the chassis remain available for measurement and control modules. This rugged one-piece controller design minimizes integration issues and eliminates the need for complex cabling to daughterboards. The PXI-8108 block diagram is shown in Figure 2.

Peripheral I/O

This module includes high-performance peripheral I/O such as 10/100/1000BASE-TX (gigabit) Ethernet and four Hi-Speed USB ports for connection to a keyboard, a mouse, a CD-ROM/DVD-ROM drive for software installation, or other standard PC peripherals such as speakers, printers, or memory sticks. Use the IEEE 1284 ECP/EPP parallel port to connect to a wide variety of devices, including tape backup drives, printers, and scanners. An RS232 port is available for connecting to serial devices. Additionally, the PXI-8108 controller includes an integrated GPIB (IEEE 488) controller, which provides control of external instrumentation, saving additional cost and a slot.

ExpressCard

This controller features an ExpressCard/34 slot. ExpressCard uses the PCI Express and Hi-Speed USB serial interfaces to provide up to 2.5 Gb/s of bidirectional throughput. Use the ExpressCard/34 slot to add a second gigabit Ethernet port to your system or additional peripheral I/O such as external hard drives, RAID arrays, 802.11 wireless LAN, IEEE 1394, Bluetooth, or various memory adapters.

Video

The PXI-8108 includes a Mobile Intel GM45 Express Chipset (Graphics and Memory Controller Hub) that has an integrated graphics processing unit. It delivers intense, realistic 3D graphics with sharp images, fast rendering, smooth motion, and high detail, without the need for an additional video card or peripheral. This unique architecture provides balanced memory usage between graphics and the system for optimal performance. Additionally, the PXI-8108 features a DVI-I video connector, compatible with digital (DVI) and analog (VGA) monitors. A DVI-I to VGA adapter is included with the controller for use with VGA monitors.

Dual Monitor Support

The DVI-I video port on the PXI-8110 is capable of supporting simultaneous DVI and VGA output. With this built-in capability, you can connect a digital and an analog monitor or two analog monitors to your PXI system at the same time with independent displays. This negates the need for a separate PXI or CompactPCI video module to connect two monitors to your PXI system. A DVI-I (male) to DVI-D (female) and VGA (female) splitter is required for connecting the two monitors.

Memory

This controller uses dual-channel 800 MHz DDR2 SDRAM, which makes it ideal for data-intensive applications requiring significant analysis. It has a single SO-DIMM socket for the DDR2 SDRAM. 1 GB (1 x 1 GB DIMM) of RAM is standard with upgrade options to 4 GB.

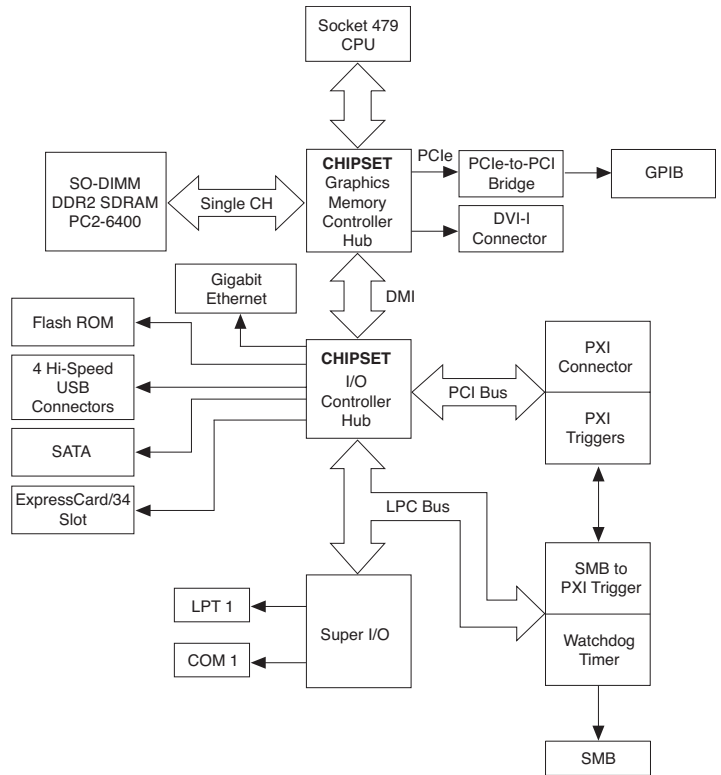


Figure 2. NI PXI-8108 Block Diagram

Extended Temperature and 24/7 Operation Option

The PXI-8108 is available in two versions to address different environmental and usage conditions. The primary difference is that the version for extended temperature and 24/7 operation uses a different hard drive, designed for both reliability in low- and high-temperature extremes and 24/7 operation. The standard version of the controllers has an operating temperature of 5 to 50 °C and a storage temperature of -40 to 65 °C. The extended temperature and 24/7 operation version has an operating temperature of 0 to 55 °C and a storage temperature of -40 to 70 °C.

You can also use the extended temperature and 24/7 operation version for applications that require continuous operation for up to 24 hours/day, seven days/week because the hard drive is rated for 24/7 operation. The hard drive in the standard version of the controllers is designed to be powered on for eight hours/day, five days/week. Additionally, 24/7 operation applications may subject the hard drive to a high duty cycle (the percentage of the maximum sustained

2.53 GHz Dual-Core Embedded Controller for PXI

throughput of the hard drive). The hard drive in the standard version of the controllers is designed for a 20 percent duty cycle. The hard drive in the extended temperature and 24/7 operation version has a capacity of 80 GB (minimum). See specifications for further details.

Software

The PXI-8108 comes with the following minimum set of software already installed:

- Microsoft Windows OS (contact NI or visit ni.com/pxiadvisor for a list of available Microsoft operating systems and for localized versions)
- NI-VISA and NI-488.2 drivers
- Drivers for all built-in I/O ports (Table 1)

With NI system assurance programs added to a PXI system order, your embedded controller is shipped already configured with all software and drivers applicable for your system. For example, assume you order a PXI system that includes LabVIEW and NI TestStand software, as well as data acquisition modules, a digitizer, an arbitrary waveform generator, and a digital multimeter (DMM). With NI system assurance programs, NI not only assembles and tests your system but also fully configures the embedded controller with the appropriate NI-DAQmx, NI-SCOPE, NI-FGEN, and NI-DMM drivers, as well as LabVIEW and NI TestStand.

To configure a complete PXI system with NI system assurance programs, contact National Instruments or visit ni.com/pxiadvisor.

Hard-Drive-Based Recovery Image

The PXI-8108 embedded controller is shipped with a factory image of the software installation stored on a separate partition of the hard drive. In the case of software corruption, you can invoke a recovery tool during the controller's boot-up process that can use this backup image to restore the controller to its shipping software configuration. You also can use this recovery tool to create custom images that you can store on external mass storage devices such as a USB memory stick, USB hard drives, and USB CD/DVD drives. With this ability, you can create custom backup images that you can use to either recover a PXI-8108 controller or replicate the installation on other PXI-8108 controllers. For more information on this tool, refer to KnowledgeBase 2ZKC020K.

USB Peripherals

National Instruments offers a USB-to-dual-PS/2 keyboard/mouse adapter cable to connect a legacy PS/2 keyboard and mouse to a single USB port on your embedded controller. Additionally, NI offers external USB CD-ROM/DVD-ROM and USB floppy drives for use with your embedded controller. Connect these drives to your embedded controller for easy software installation and upgrades. Both are completely powered through the USB ports, so no external power connections are required. Additional USB peripherals, such as USB speakers to add audio or USB memory sticks to add easily removable memory, are widely available from PC peripheral manufacturers.

Additional Peripheral I/O

National Instruments offers numerous plug-in modules to add more peripheral I/O to your PXI system. With the wide variety of peripheral I/O modules available, you can choose modules that add communication with serial, IEEE 1394, and SCSI, in addition to numerous others. You also can obtain modules for controlling other PXI or VXI/VME systems. Visit ni.com/pxiadvisor to configure a system with additional peripheral I/O modules.

2.53 GHz Dual-Core Embedded Controller for PXI

Ordering Information

For online configuration of a complete PXI system, including NI system assurance programs, visit ni.com/pxiadvisor.

Step 1. Controller model – select one of the following.

NI PXI-8108	
Base.....	780446-xx
Extended Temperature and 24/7.....	780447-xx

Step 2. Replace “xx” to select installed OS.

Windows Vista Business (English).....	02
Windows Vista – downgraded to Windows XP Professional (English)	01
Localized Windows XP or Other OS ¹	00

¹Contact National Instruments or visit ni.com/pxiadvisor for the latest operating systems.

Step 3. Memory upgrades – select the amount of upgrade memory.

Standard:

1 GB (1 x 1 GB DIMM)

Recommended upgraded memory configurations:

2 GB (1 x 2 GB DIMM must be purchased)

4 GB (1 x 4 GB DIMM must be purchased)

2 GB DDR2 RAM for PXI-8108	780446-2048
4 GB DDR2 RAM for PXI-8108	780446-4096

Step 4. Accessories¹

60 GB (or greater) 2.5 in. SATA blank HDD spare/replacement.....	779175-03
80 GB (or greater) 2.5 in. SATA extended temp hard-drive upgrade.....	779175-07
32 GB 2.5 in. SATA solid-state hard-drive upgrade	779175-08
250 GB (or greater) 2.5 in. SATA hard-drive upgrade	779175-06
USB-to-dual-PS/2 keyboard/mouse adapter cable.....	778713-02
External USB CD-ROM/DVD-ROM drive.....	778492-01
External USB floppy drive	778492-02
USB English keyboard and optical mouse	779660-01
Parallel port adapter cable (6 in.).....	777169-01
NI MKD-1117 (rack-mount 1U LCD monitor, keyboard, mouse drawer).....	779872-01
NI FPM-1017 (17 in. flat panel monitor)	779559-01
NI FPT-1015 (flat panel touch screen with VGA interface and USB).....	779560-01
GPIO port adapter cable, 2 m	183285-02

¹For additional peripheral I/O modules, including serial, IEEE 1394, and SCSI, visit ni.com/pxiadvisor.

BUY NOW

For complete product specifications, pricing, and accessory information, call 800 813 3693 (U.S.) or go to ni.com/pxi.

2.53 GHz Dual-Core Embedded Controller for PXI

Specifications

Specifications subject to change without notice.

Features

Processor.....	Intel Core 2 Duo 2.53 GHz T9400
Chipset.....	Mobile Intel GM45 Express Chipset
Front-side bus.....	1066 MHz
System memory (RAM).....	1 GB dual-channel DDR2 RAM PC2 6400 (standard); 4 GB dual-channel DDR2 RAM PC2 6400 (maximum)
Ethernet.....	10/100/1000BASE-TX, RJ45 connector
Hard drive	
Base.....	80 GB minimum, internal 2.5 in., 9.5 mm Serial ATA 1.0 interface
Extended Temperature and 24/7 Operation Option.....	80 GB minimum, internal 2.5 in., 9.5 mm Serial ATA 1.0 interface
Video.....	Integrated Graphics (Mobile Intel GM45 Express Chipset)
Serial.....	1 (RS232)
Parallel.....	IEEE 1284 Type C miniature connector (adapter cable not included)
GPIOB.....	PCI-GPIB/TNT, micro D25 connector IEEE 488 and HS488 transfers
Hi-Speed USB.....	4
ExpressCard/34.....	1 (34 mm slot)

Power Requirements

Voltage (V)	Current (A)	
	Typical	Maximum
+3.3	2	3
+5	6	8
+12	0.1	0.3
-12	0.00	0.00

Physical

Board dimensions.....	4-slot 3U PXI module 8.1 by 13 by 21.6 cm (3.2 by 5.1 by 8.5 in.)
Slot requirements.....	One system slot plus three controller expansion slots
Compatibility.....	Fully compatible with PXI Specification
Weight.....	0.914 kg (2.02 lb) typical

Environment

Maximum altitude.....	2,000 m (800 mbar) (at 25 °C ambient temperature)
Pollution degree.....	2
Indoor use only.	

Operating Environment

Ambient temperature range ¹	
Base.....	5 to 50 °C ² (tested in accordance with IEC-60068-2-1 and IEC-60068-2-2)
Extended temperature range.....	0 to 55 °C (tested in accordance with IEC-60068-2-1 and IEC-60068-2-2)
Relative humidity range.....	10 to 90% noncondensing (tested in accordance with IEC-60068-2-56)

¹For chassis that are not available in the online catalog at ni.com, contact National Instruments for supported operating temperatures.

²5 to 40 °C for the NI PXI-1000B DC.

Storage Environment

Ambient temperature range	
Base.....	-40 to 65 °C (tested in accordance with IEC-60068-2-1 and IEC-60068-2-2)
Extended temperature range.....	-40 to 70 °C (tested in accordance with IEC-60068-2-1 and IEC-60068-2-2)
Relative humidity range.....	5 to 95% noncondensing (tested in accordance with IEC-60068-2-56)

Shock and Vibration

Operating shock.....	30 g peak, half-sine, 11 ms pulse (tested in accordance with IEC-60068-2-27; test profile developed in accordance with MIL-PRF-28800F)
Random vibration	
Operating.....	5 to 500 Hz, 0.3 g _{rms} (with solid-state hard drive)
Nonoperating.....	5 to 500 Hz, 2.4 g _{rms} (tested in accordance with IEC-60068-2-64; nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3)

BUY ONLINE at ni.com or CALL 800 813 3693 (U.S.)

2.53 GHz Dual-Core Embedded Controller for PXI

Safety Compliance

This product is designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-01, CSA 61010-1

Note: For UL and other safety certifications, refer to the product label or visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Electromagnetic Compatibility

This product is designed to meet the requirements of the following standards of EMC for electrical equipment for measurement, control, and laboratory use:

- EN 61326 (IEC 61326): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions

Note: For EMC compliance, operate this device according to product documentation.

CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE marking, as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

Note: Refer to the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Waste Electrical and Electronic Equipment (WEEE)

EU Customers: At the end of their life cycle, all products must be sent to a WEEE recycling center. For more information about WEEE recycling centers and National Instruments WEEE initiatives, visit ni.com/environment/weee.htm.

NI Services and Support



NI has the services and support to meet your needs around the globe and through the application life cycle – from planning and development through deployment and ongoing maintenance. We offer services and service levels to meet customer requirements in research, design, validation, and manufacturing.

Visit ni.com/services.

Training and Certification

NI training is the fastest, most certain route to productivity with our products. NI training can shorten your learning curve, save development time, and reduce maintenance costs over the application life cycle. We schedule instructor-led courses in cities worldwide, or we can hold a course at your facility. We also offer a professional certification program that identifies individuals who have high levels of skill and knowledge on using NI products.

Visit ni.com/training.

Professional Services

Our NI Professional Services team is composed of NI applications and systems engineers and a worldwide National Instruments Alliance Partner program of more than 600 independent consultants and integrators. Services range from



start-up assistance to turnkey system integration. Visit ni.com/alliance.

OEM Support

We offer design-in consulting and product integration assistance if you want to use our products for OEM applications. For information about special pricing and services for OEM customers, visit ni.com/oem.



ni.com ■ 800 813 3693

National Instruments ■ info@ni.com

Local Sales and Technical Support

In offices worldwide, our staff is local to the country, giving you access to engineers who speak your language. NI delivers industry-leading technical support through online knowledge bases, our applications engineers, and access to 14,000 measurement and automation professionals within NI Developer Exchange forums. Find immediate answers to your questions at ni.com/support.

We also offer service programs that provide automatic upgrades to your application development environment and higher levels of technical support. Visit ni.com/ssp.

Hardware Services

System Assurance Programs

NI system assurance programs are designed to make it even easier for you to own an NI system. These programs include configuration and deployment services for your NI PXI, CompactRIO, or Compact FieldPoint system. The NI Basic System Assurance Program provides a simple integration test and ensures that your system is delivered completely assembled in one box. When you configure your system with the NI Standard System Assurance Program, you can select from available NI system driver sets and application development environments to create customized, reorderable software configurations. Your system arrives fully assembled and tested in one box with your software preinstalled. When you order your system with the standard program, you also receive system-specific documentation including a bill of materials, an integration test report, a recommended maintenance plan, and frequently asked question documents. Finally, the standard program reduces the total cost of owning an NI system by providing three years of warranty coverage and calibration service. Use the online product advisors at ni.com/advisor to find a system assurance program to meet your needs.

Calibration Services

NI recognizes the need to maintain properly calibrated devices for high-accuracy measurements. We provide manual calibration procedures, services to recalibrate your products, and automated calibration software specifically designed for use by metrology laboratories. Visit ni.com/calibration.

Repair and Extended Warranty

NI provides complete repair services for our products. Express repair and advance replacement services are also available. We offer extended warranties to help you meet project life-cycle requirements. Visit ni.com/services.