





The information contained in this document is proprietary to VARIITRONIX LTD. and shall be protected from any reproduction in part or as a whole without Vantironix's written approval.

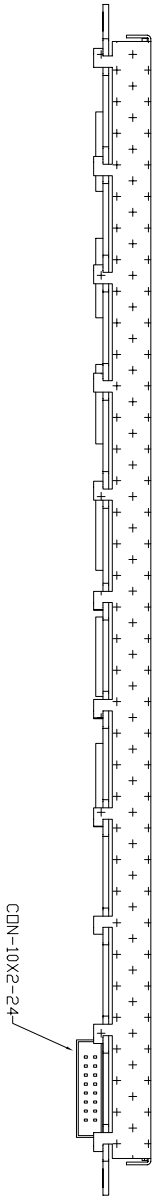

(DOT SIZE FOR CUSTOMER REFERENCE ONLY)

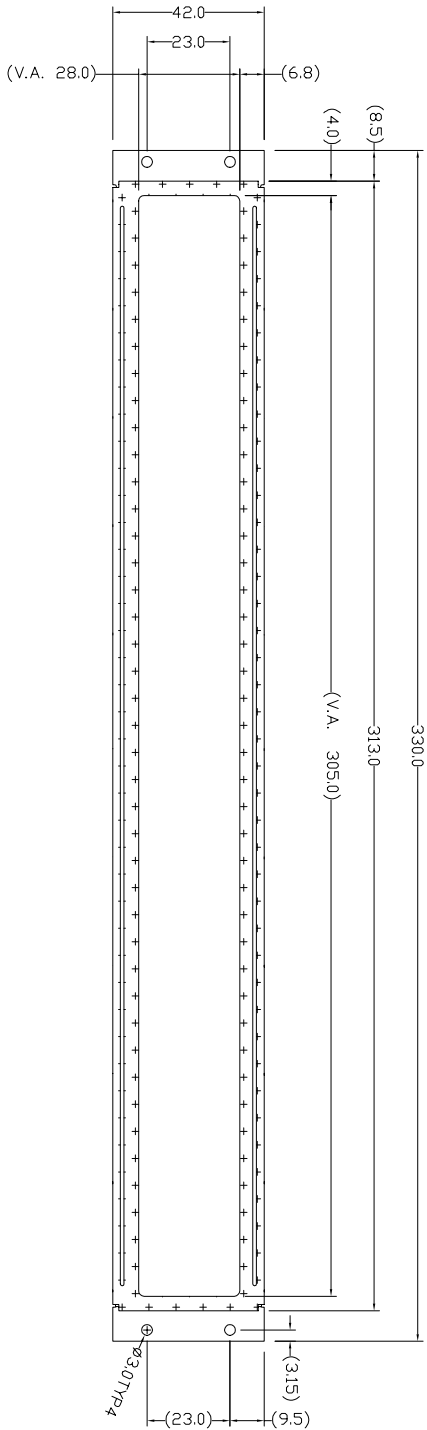

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VLCD	GND	VDD	M	DOFF	FLM	LP-C	LP-S	XCK	D0	D1	D2	D3	AD0	AD1	AD2



Display Type	Graphic Display, Reflective, BCD, Blue & White
Display Resolution	352 X 32
Viewing Angle	All angle
Max ratio and bias level	1/32 - 1/7
Logic Voltage (V)	3V - 5V
LCD Driving Voltage	1BD
Operation Temperature	0°C to +40°C
Storage Temperature	-20°C to +70°C


TITLE: PRELIMINARY SPECIFICATION OF MODULE

PROJECT NO: BCD35232

TOLERANCE UNLESS OTHERWISE SPECIFIED:	XX ±0.3
DIMENSIONS IN MM	XXX ±0.1
ANGULAR: ±1°	
MATERIAL: N/A	FINISH: N/A
SCALE: DO NOT ON SCALE	OVERALL THK: N/A

THIRD ANGLE PROJECTION	NAME	SIGN	DATE
DRAWN:	CHAN KAM FAI		05.07.29
CHECKED:	FUNG		
APPROVED:	K.P.HO		
ITEM NO.:			

DESCRIPTION:	
FILE NO: D:/	BCD35232 REV: 1
SHEET	1 OF 1



VARIITRONIX LIMITED

- NOTES:
- 1. ◇ : SPECIAL CHARACTERISTIC
  - 2. + : SAFETY CHARACTERISTIC
  - 3. ▽ : CRITICAL DIMENSION
  - 4. (.) : REFERENCE DIMENSION