

PSC Series

6...12 A Switching Regulators



Input voltage up to 144 V DC
Single output of 3.3...36 V DC
No input to output isolation



- Efficiency up to 96%
- Low input-output differential voltage
- No derating over temperature

Selection chart

| Output $U_{o\ nom}$ [V DC] | Input voltage U_i [V DC] | Rated power $P_{o\ tot}$ [W] | Efficiency η_{typ} [%] | Type | Options | |
|----------------------------------|----------------------------------|------------------------------------|-----------------------------------|------|--------------|----------------|
| 3.3 | 12 | 8...40 | 39.6 | 77 | PSC 3E122 | iR-Package |
| 5.1 | 10 | 8...80 | 51 | 79 | PSC 5A10-7iR | -9, L, P, C, D |
| 5.1 | 11 | 8...40 | 56.1 | 79 | PSC 5A11-2 | iR-Package |
| 5.1 | 12 | 7...40 | 61.2 | 83 | PSC 5A12-7iR | -9, L, P, C, D |
| 12 | 6 | 18...144 | 72 | 89 | PSC 126-7iR | -9, L, P, C, D |
| 12 | 8 | 15...80 | 96 | 90 | PSC 128-7iR | -9, L, P, C, D |
| 12 | 9 | 15...40 | 108 | 90 | PSC 129-2 | iR-Package |
| 15 | 6 | 22...144 | 90 | 90 | PSC 156-7iR | -9, L, P, C, D |
| 15 | 8 | 19...80 | 120 | 91 | PSC 158-7iR | -9, L, P, C, D |
| 15 | 9 | 19...40 | 135 | 91 | PSC 159-2 | iR-Package |
| 24 | 6 | 31...144 | 144 | 94 | PSC 246-7iR | -9, L, P, C, D |
| 24 | 8 | 29...80 | 192 | 94 | PSC 248-7iR | -9, L, P, C, D |
| 24 | 9 | 29...60 | 216 | 94 | PSC 249-2 | iR-Package |
| 36 | 6 | 44...144 | 216 | 95 | PSC 366-7iR | -9, L, P, C, D |
| 36 | 8 | 42...80 | 288 | 96 | PSC 368-7iR | -9, L, P, C, D |

Chassis Mountable

PSC Series

Input

| | |
|-----------------------|--------------------------|
| Input voltage | refer to selection chart |
| No load input current | $\leq 50 \text{ mA}$ |

Output

| | | |
|---------------------------------|---|------------------------------|
| Efficiency | $U_{\text{i nom}}, I_{\text{o nom}}$ | up to 96% |
| Output voltage setting accuracy | $U_{\text{i nom}}, I_{\text{o nom}}$ | $\pm 0.6\% U_{\text{o nom}}$ |
| Output voltage switching noise | IEC/EN 61204, total | typ. 0.4% |
| Line regulation | $U_{\text{i min}} \dots U_{\text{i max}}, I_{\text{o nom}}$ | typ. $\pm 0.3\%$ |
| Load regulation | $U_{\text{i nom}}, 0 \dots I_{\text{o nom}}$ | typ. 0.3% |
| Minimum load | not required | 0 A |
| Current limitation | rectangular U/I characteristic | typ. 110% $I_{\text{o nom}}$ |
| Operation in parallel | by current limitation | |

Protection

| | |
|----------------------------|--|
| Input reverse polarity | with external fuse (built-in fuse with option C installed) |
| Input undervoltage lockout | typ. 80% $U_{\text{i min}}$ |
| Input transient protection | suppressor diode |
| Output | no-load, overload and short circuit proof |
| Output overvoltage | suppressor diode in each output typ. 150% $U_{\text{o nom}}$ |

Safety

| | |
|--------------------------------|--------------------------------------|
| Approvals | EN 60950, UL 1950, CSA C22.2 No. 950 |
| Protection degree | IP 20 |
| Electric strength test voltage | I/case and O/case 500/750/1500 V DC |

EMC

| | |
|--------------------------------|-------------------|
| Electrostatic discharge | IEC/EN 61000-4-2 |
| Electromagnetic field | IEC/EN 61000-4-3 |
| Electr. fast transients/bursts | IEC/EN 61000-4-4 |
| Surge | IEC/EN 61000-4-5 |
| Conducted disturbances | IEC/EN 61000-4-6 |
| Electromagnetic emissions | CISPR 22/EN 55022 |

Environmental

| | | |
|----------------------------------|---|-------------|
| Operating ambient temperature | -2, $U_{i\text{ nom}}$, $I_{o\text{ nom}}$, convection cooled | -10...50°C |
| Operating case temperature T_C | -2, $U_{i\text{ nom}}$, $I_{o\text{ nom}}$ | -10...80°C |
| Storage temperature | -2, non operational | -25...100°C |
| Operating ambient temperature | -7, $U_{i\text{ nom}}$, $I_{o\text{ nom}}$, convection cooled | -25...71°C |
| Operating case temperature T_C | -7, $U_{i\text{ nom}}$, $I_{o\text{ nom}}$ | -25...95°C |
| Storage temperature | -7, non operational | -40...100°C |
| Damp heat | IEC/EN 60068-2-3 | |
| Vibration, sinusoidal | IEC/EN 60068-2-6 | |
| Shock | IEC/EN 60068-2-27 | |
| Bump | IEC/EN 60068-2-29 | |
| Random vibration | IEC/EN 60068-2-64 | |
| MTBF | MIL-HDBK-217 | |

Options


| | | |
|--|--------------------------------|------|
| Extended temperature range | -40...71°C, ambient, operating | -9 |
| Inhibit, TTL input, output(s) enabled if left open | | i |
| Output voltage adjustment | 0...108% $U_{o\text{ nom}}$ | R |
| Additional internal input filter | | L |
| Output voltage adjustment | $\pm 8\%$ $U_{o\text{ nom}}$ | P |
| Thyristor crowbar on output | | C |
| Input or output undervoltage monitoring | | D/D1 |

Chassis Mountable

PSC Series

Mechanical data

Tolerances ± 0.3 mm (0.012") unless otherwise indicated.

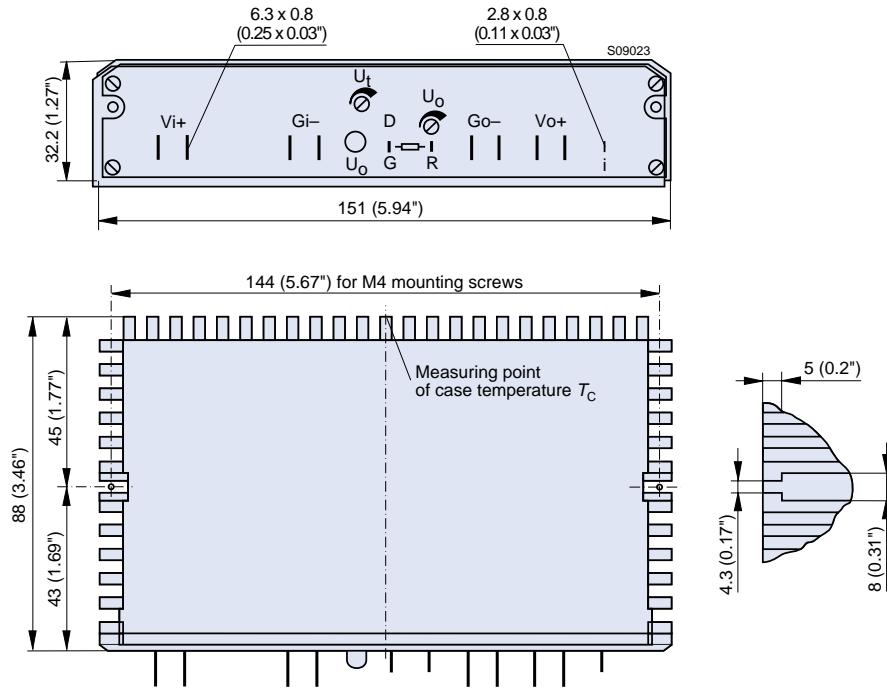

Accessories

Isolation pads for easy and safe PCB mounting
Ring core chokes for ripple and interference reduction