



Bridge Diodes (Schottky Barrier)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)					Others			
	V _{RM} (V)	I _{F(AV)} (A) With Heatsink	I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (mA)	I _{R(H)} (mA)	t _{rr} (ns)	R _{th} (J-c)	Mass (g)	Fig.	
RBV-404B	40	4.0	40	-40 to +125		max per element	2.0	2.0	20	100	100/100	5.0	4.25	Ⓐ
RBV-406B	60						2.0							
RBV-1004B	40					10.0	60							


RBV-404B

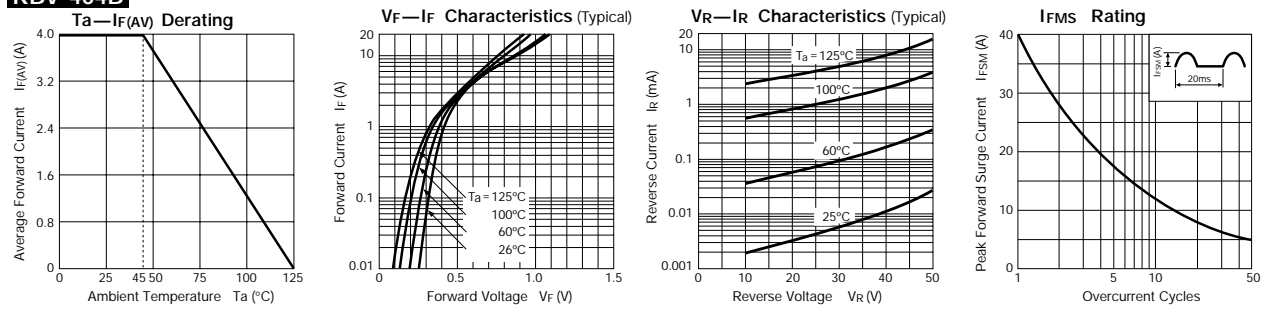

RBV-406B

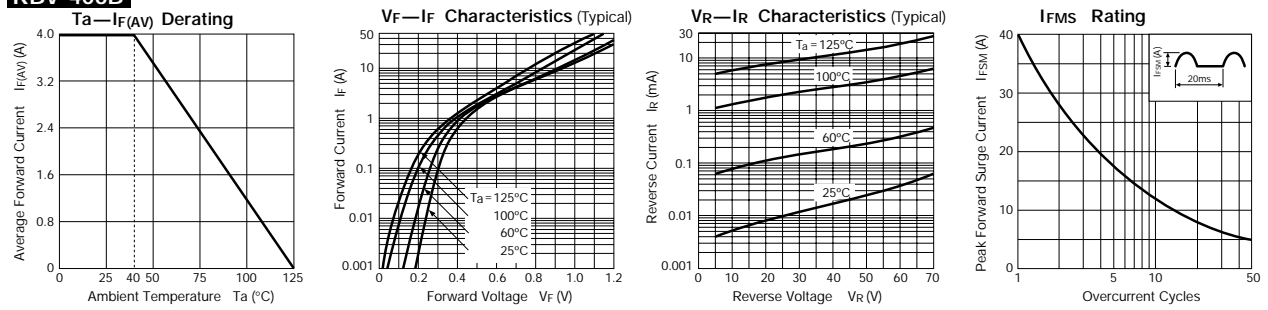

RBV-1004B

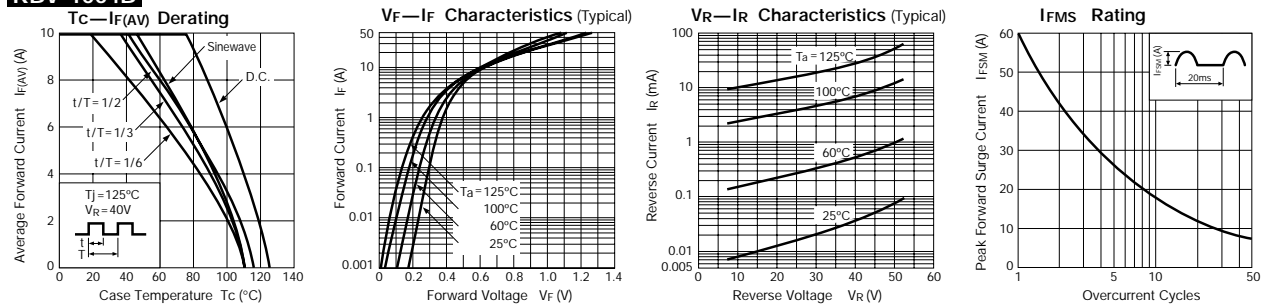

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

Fig. Ⓐ

