


# Filter SMD, Ceramic





**LTCA  
LTCV**

**Features:**

- Series CA or CV
- Consumer electronics
- Individual specification: A5, S2, S3 or J

Specifications					
Part	LTCA				
	A5-	S2-	S3-	J-	HY
3db band width (kHz)	280 ±50	230 ±50	180 ±40	150 ±40	110 ±30
20db band width (kHz) max	650	570	520	430	350
Insertion loss (dB) max	6	6	6	10	9
Spurious attenuation ( 9 ~ 12MHz) (dB) min	30	30	30	30	30

Specifications					
Part	LTCV				
	A5-	S2-	S3-	J-	HY
3db band width (kHz)	280 ±50	230 ±50	180 ±40	150 ±40	110 ±30
20db band width (kHz) max	590	510	470	380	320
Insertion loss (dB) max	3.0 ±2.0	3.5 ±2.0	4.0 ±2.0	5.5 ±2.0	6.0 ±2.0
Spurious attenuation ( 9 ~ 12MHz) (dB) min	35	35	35	35	35

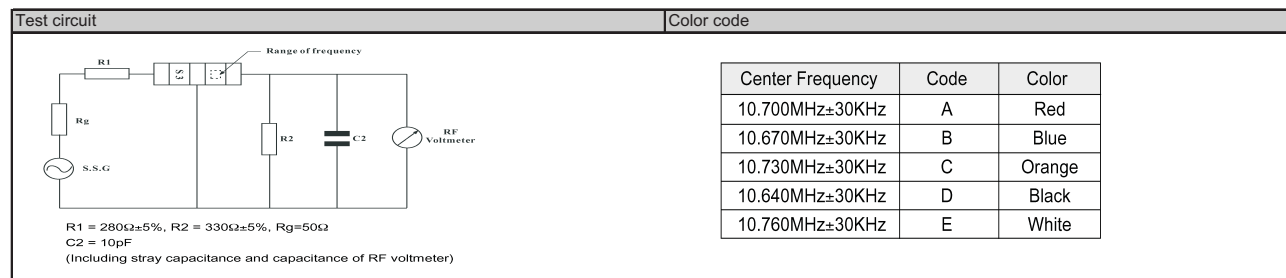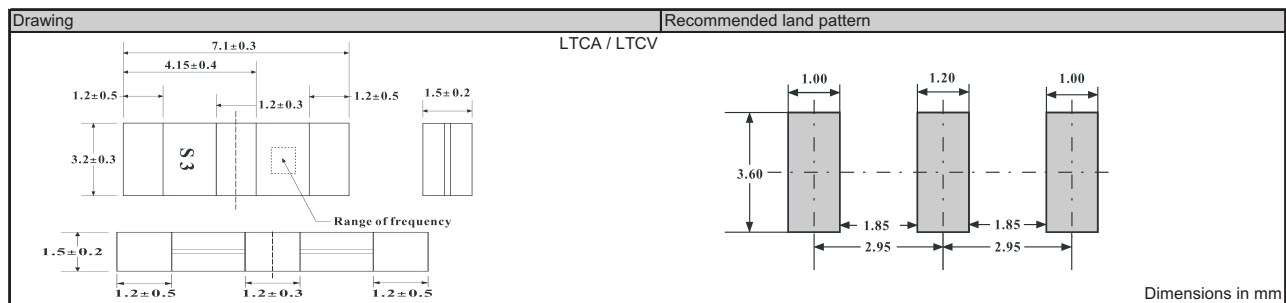

Order key				
F	- LTCA	- A5	- 10.700 M	-
Part	Package	Individual specification	Center frequency M = MHz. K = KHz	Option
F= Ceramic filter	LTCA LTCV	A5 S2 S3 J	10.700 MHz (= A = red) 10.670 MHz (= B = blue) 10.730 MHz (= C = orange) 10.640 MHz (= D = black) 10.760 MHz (= E = white) 450 ~ XXX ~ 470 KHz	blank = standard     X=Special options