
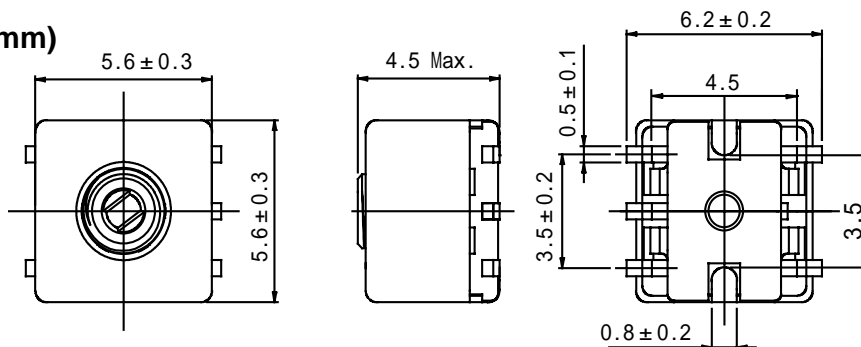


Type: CS54
Product Description


- 5.9 × 5.9mm Max.(L × W), 4.5mm Max. Height.
- Inductance: 5 μ H Max.
- Operating frequency:150MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.


Feature


- Variable shielded type.
- Preset products are available.
- RoHS Compliance.

Dimensions (mm)


- * Dimension does not include solder used on coil.
- * Pin pitch should be measured at the root of terminal.
- * Dimensions without tolerance are approx.

Connection (Bottom View)


“ S ” is winding start.

Land Patterns (mm)

Specification (Part No. 24-Ø288ØZØ1-A)

Item	(1 - 3)	Measuring Condition
Tuning Capacity	2 1.0 p F ± 1 % Variable	1 0 0 M H z
Unloaded Q	7 5 ± 2 5 % Within	1 0 0 M H z
Preset	2 1.0 p F ± 2 % Within	1 0 0 M H z

Please refer to the sales offices on our website for a representative near you

www.sumida.com