



Pin 1 – Ground
 Pin 2 – V_{OUT}
 Case – V_{IN}

K Package – TO-3



Pin 1 – Ground
 Pin 2 – V_{OUT}
 Case – V_{IN}


R Package – TO-66



Pin 1 – Ground
 Pin 2 – V_{IN}
 Pin 3 – V_{OUT}
 Case – V_{IN}


G Package – TO-257
IG Package – TO-257*

* isolated Case on IG package



Pin 1 – Ground
 Pin 2 – V_{IN}
 Pin 3 – V_{OUT}

SMD Package – SMD1
 Ceramic Surface Mount

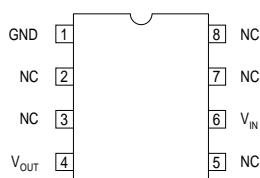

J Package – 8 Pin Cerdip

1.5 AMP NEGATIVE VOLTAGE REGULATOR

FEATURES

- OUTPUT VOLTAGES OF -5, -12, -15V
- 0.01% / V LINE REGULATION
- 0.3% / A LOAD REGULATION
- THERMAL OVERLOAD PROTECTION
- SHORT CIRCUIT PROTECTION
- OUTPUT TRANSISTOR SOA PROTECTION
- 1% VOLTAGE TOLERANCE OPTION (-A VERSIONS)

DESCRIPTION

The IP120A / LM120 / IP7900A / IP7900 series of 3 terminal regulators is available with several fixed output voltage making them useful in a wide range of applications.

The A suffix devices provide 0.01% / V line regulation, 0.3% / A load regulation and $\pm 1\%$ output voltage tolerance at room temperature.

Protection features include Safe Operating Area current limiting and thermal shutdown.

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^\circ C$ unless otherwise stated)


V_I	DC Input Voltage (for $V_O = -5, -12, -15V$)	35V
P_D	Power Dissipation	Internally limited
T_j	Operating Junction Temperature Range	-55 to 150°C
T_{stg}	Storage Temperature	-65 to 150°C

Parameter	Test Conditions	IP7905A IP120A-05			IP7905 , IP120-05 LM120-05			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
V_O	Output Voltage $I_O = 500\text{mA}$ $V_{IN} = -10\text{V}$ $I_O = 5\text{mA to } I_{MAX}$ $V_{IN} = -7.5\text{V to } -20\text{V}$ $P_D \leq P_{MAX}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	-4.95	-5	-5.05	-4.9	-5	-5.1	V
		-4.85		-5.15	-4.8		-5.2	
V_O	Low Supply $I_O = 5\text{mA to } I_{MAX}$ $P_D \leq P_{MAX}$ $V_{IN} = -7\text{V to } -20\text{V}$	-4.75		-5.15	-4.75		-5.25	V
ΔV_O	Line Regulation $I_O = 0.5 I_{MAX}$ $V_{IN} = -7\text{V to } -25\text{V}$ $V_{IN} = -7.5\text{V to } -20\text{V}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	3	10		3	25		mV
		3	10		3	50		
	Line Regulation $V_{IN} = -8\text{V to } -12\text{V}$ $I_O \leq I_{MAX}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	1	4		1	25		
		1	12		2	50		
ΔV_O	Load Regulation $V_{IN} = -10\text{V}$ $I_O = 5\text{mA to } 1.5\text{A}$ $I_O = 250\text{mA to } 750\text{mA}$	10	25		10	75		mV
		4	15		4	25		
	$V_{IN} = -10\text{V}$ $I_O = 5\text{mA to } I_{MAX}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	7	25		7	50		
I_Q	Quiescent Current $I_O \leq 0.5 I_{MAX}$ $V_{IN} = -10\text{V}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	1	1.9		1	1.9		mA
		1	2		1	2		
ΔI_Q	Quiescent Current Change $I_O = 5\text{mA to } I_{MAX}$ $V_{IN} = -10\text{V}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	0.2	0.4		0.2	0.4		mA
		0.2	0.5		0.2	0.5		
	Quiescent Current Change $I_O \leq 0.5 I_{MAX}$ $V_{IN} = -7\text{V to } -25\text{V}$ $V_{IN} = -8\text{V to } -25\text{V}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	0.1	0.4		0.1	0.4		
		0.1	0.5		0.1	1.0		
V_N	Output Noise Voltage $f = 10\text{Hz to } 100\text{kHz}$ $V_{IN} = -10\text{V}$	40	400		40	400		μV
$\frac{\Delta V_{IN}}{\Delta V_O}$	Ripple Rejection $f = 120\text{Hz}$ $V_{IN} = -8\text{V to } -18\text{V}$ $I_O \leq I_{MAX}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	66	80		54	80		dB
		66	80		54	80		
Dropout Voltage	$I_O = I_{MAX}$	1.1	2.3		1.1	2.3		V
R_O	Output Resistance $f = 1 \text{ kHz}$	5			5			$\text{m}\Omega$
I_{sc}	Short Circuit Current $V_{IN} = -35\text{V}$	0.6	1.2		0.6	1.2		A
I_{pk}	Peak Output Current $V_{IN} = -10\text{V}$	2.4	3.3		2.4	3.3		
Average Temperature Coefficient of V_O	$I_O = 5\text{mA}$	0.2	2		0.2	2		$\text{mV}/^\circ\text{C}$
Input Voltage required to maintain line regulation	$I_O \leq I_{MAX}$	-7.3			-7.3			V

1) All characteristics are measured with a capacitor across the input of $0.22\mu\text{F}$ and a capacitor across the output of $0.1\mu\text{F}$.

All characteristics except noise voltage and ripple rejection ratio are measured using pulse techniques ($t_p \leq 10\text{ms}$, $\delta \leq 5\%$). Output voltage changes due to changes in internal temperature must be taken into account separately.

2) Test Conditions unless otherwise stated:
 $P_{MAX} = 10\text{W}$ for TO-220SM , $P_{MAX} = 1\text{W}$ for Cerdip, $P_{MAX} = 20\text{W}$ for all other package devices
 $I_{MAX} = 1.0\text{A}$, $T_J = 25^\circ\text{C}$

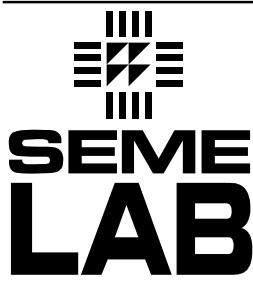

**IP120A SERIES
IP120 SERIES
IP7900A SERIES
IP7900 SERIES
LM120 SERIES**

Parameter	Test Conditions	IP7912A IP120A-12			IP7912 , IP120-12 LM120-12			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
V_O Output Voltage	$I_O = 500\text{mA}$ $V_{IN} = -19\text{V}$	-11.88	-12	-12.12	-11.76	-12	-12.24	V
	$V_{IN} = -14.8\text{V}$ to -27V $P_D \leq P_{MAX}$ $I_O = 5\text{mA}$ to I_{MAX} $T_J = -55$ to 150°C	-11.64		-12.36	-11.52		-12.48	
V_O Low Supply	$I_O = 5\text{mA}$ to I_{MAX} $P_D \leq P_{MAX}$ $V_{IN} = -14.5\text{V}$ to -27V	-11.40		-12.36	-11.40		-12.60	V
ΔV_O Line Regulation	$I_O = 0.5 I_{MAX}$	$V_{IN} = -14.5\text{V}$ to -30V	4	18	4	120		mV
		$V_{IN} = -14.8\text{V}$ to -27V	4	18	4	200		
	$I_O \leq I_{MAX}$		1	4	1	25		
	$V_{IN} = -16\text{V}$ to -22V	$T_J = -55$ to 150°C	2	9	2	60		
ΔV_O Load Regulation	$V_{IN} = -19\text{V}$	$I_O = 5\text{mA}$ to 1.5A	12	32	12	80		mV
		$I_O = 250\text{mA}$ to 750mA	4	19	4	60		
	$V_{IN} = -19\text{V}$	$I_O = 5\text{mA}$ to I_{MAX} $T_J = -55$ to 150°C		8	60	8	120	
I_Q Quiescent Current	$I_O \leq 0.5 I_{MAX}$ $V_{IN} = -19\text{V}$		0.2	0.4	0.2	0.4		mA
		$T_J = -55$ to 150°C	1	2	1	2		
ΔI_Q Quiescent Current Change	$I_O = 5\text{mA}$ to I_{MAX} $V_{IN} = -19\text{V}$		0.2	0.4	0.2	0.4		mA
		$T_J = -55$ to 150°C	0.2	0.5	0.2	0.5		
	$I_O \leq 0.5 I_{MAX}$	$V_{IN} = -14.5\text{V}$ to -30V	0.1	0.4	0.1	0.4		
		$V_{IN} = -15\text{V}$ to -30V $T_J = -55$ to 150°C	0.1	0.5	0.1	1.0		
V_N Output Noise Voltage	$f = 10\text{Hz}$ to 100kHz $V_{IN} = -19\text{V}$		75	960	75	960		μV
$\frac{\Delta V_{IN}}{\Delta V_O}$ Ripple Rejection	$f = 120\text{Hz}$ $V_{IN} = -15\text{V}$ to -25V	$I_O \leq I_{MAX}$	58	72	56	72		dB
		$I_O \leq 0.5 I_{MAX}$ $T_J = -55$ to 150°C	58	72	56	72		
Dropout Voltage	$I_O = I_{MAX}$		1.1	2.3	1.1	2.3		V
R_O Output Resistance	$f = 1\text{kHz}$		8		8			$\text{m}\Omega$
I_{sc} Short Circuit Current	$V_{IN} = -35\text{V}$		0.6	1.2	0.6	1.2		A
I_{pk} Peak Output Current	$V_{IN} = -19\text{V}$		2.4	3.3	2.4	3.3		
Average Temperature Coefficient of V_O	$I_O = 5\text{mA}$		0.5	4.8	0.5	4.8		$\text{mV}/^\circ\text{C}$
Input Voltage required to maintain line regulation	$I_O \leq I_{MAX}$		-14.5		-14.5			V

1) All characteristics are measured with a capacitor across the input of $0.22\mu\text{F}$ and a capacitor across the output of $0.1\mu\text{F}$.

All characteristics except noise voltage and ripple rejection ratio are measured using pulse techniques ($t_p \leq 10\text{ms}$, $\delta \leq 5\%$). Output voltage changes due to changes in internal temperature must be taken into account separately.

2) Test Conditions unless otherwise stated: $P_{MAX} = 10\text{W}$ for TO-220SM , $P_{MAX} = 1\text{W}$ for Cerdip, $P_{MAX} = 20\text{W}$ for all other package devices
 $I_{MAX} = 1.0\text{A}$, $T_J = 25^\circ\text{C}$

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612.

E-mail: sales@semelab.co.uk Website: <http://www.semelab.co.uk>

Prelim. 2/99

Parameter	Test Conditions	IP7915A IP120A-15			IP7915 , IP120-15 LM120-15			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
V_O Output Voltage	$I_O = 500\text{mA}$ $V_{IN} = -23\text{V}$	-14.85	-15	-15.15	-14.7	-15	-15.3	V
	$V_{IN} = -17.9\text{V}$ to -30V $P_D \leq P_{MAX}$	-14.55		-15.45	-14.4		-15.6	
V_O Low Supply	$I_O = 5\text{mA}$ to I_{MAX} $P_D \leq P_{MAX}$	-14.25		-15.45	-14.25		-15.75	V
	$V_{IN} = -17.5\text{V}$ to -30V							
ΔV_O Line Regulation	$I_O = 0.5 I_{MAX}$	$V_{IN} = -17.5\text{V}$ to -30V	4	22	4	150		mV
		$V_{IN} = -17.9\text{V}$ to -30V	4	22	4	250		
		$T_J = -55$ to 150°C						
	$I_O \leq I_{MAX}$		2	10	2	75		
ΔV_O Load Regulation	$V_{IN} = -20\text{V}$ to -26V	$T_J = -55$ to 150°C	5	30	5	150		mV
	$V_{IN} = -23\text{V}$	$I_O = 5\text{mA}$ to 1.5A	12	35	12	80		
		$I_O = 250\text{mA}$ to 750mA	4	21	4	75		
	$V_{IN} = -23\text{V}$	$I_O = 5\text{mA}$ to I_{MAX} $T_J = -55$ to 150°C	9	75	9	150		
I_Q Quiescent Current	$I_O \leq 0.5 I_{MAX}$		1	1.9	1	1.9		mA
	$V_{IN} = -23\text{V}$	$T_J = -55$ to 150°C	1	2	1	2		
ΔI_Q Quiescent Current Change	$I_O = 5\text{mA}$ to I_{MAX}		0.2	0.4	0.2	0.4		mA
	$V_{IN} = -23\text{V}$	$T_J = -55$ to 150°C	0.2	0.5	0.2	0.5		
	$I_O \leq 0.5 I_{MAX}$	$V_{IN} = -17.5\text{V}$ to -30V	0.1	0.4	0.1	0.4		
		$V_{IN} = -18.5\text{V}$ to -30V $T_J = -55$ to 150°C	0.1	0.5	0.1	1.0		
V_N Output Noise Voltage	$f = 10\text{Hz}$ to 100kHz		90	1200	90	1200		μV
$\frac{\Delta V_{IN}}{\Delta V_O}$ Ripple Rejection	$f = 120\text{Hz}$	$I_O \leq I_{MAX}$	56	70	54	70		dB
	$V_{IN} = -18.5\text{V}$ to -28.5V	$I_O \leq 0.5 I_{MAX}$ $T_J = -55$ to 150°C	56	70	54	70		
Dropout Voltage	$I_O = I_{MAX}$		1.1	2.3	1.1	2.3		V
R_O Output Resistance	$f = 1\text{kHz}$		9		9			$\text{m}\Omega$
I_{sc} Short Circuit Current	$V_{IN} = -35\text{V}$		0.6	1.2	0.6	1.2		A
I_{pk} Peak Output Current	$V_{IN} = -23\text{V}$		2.4	3.3	2.4	3.3		
Average Temperature Coefficient of V_O	$I_O = 5\text{mA}$		0.6	6	0.6	6		$\text{mV}/^\circ\text{C}$
Input Voltage required to maintain line regulation	$I_O \leq I_{MAX}$		-17.5		-17.5			V

1) All characteristics are measured with a capacitor across the input of $0.22\mu\text{F}$ and a capacitor across the output of $0.1\mu\text{F}$.

All characteristics except noise voltage and ripple rejection ratio are measured using pulse techniques ($t_p \leq 10\text{ms}$, $\delta \leq 5\%$). Output voltage changes due to changes in internal temperature must be taken into account separately.


2) Test Conditions unless otherwise stated: $P_{MAX} = 10\text{W}$ for TO-220SM , $P_{MAX} = 1\text{W}$ for Cerdip, $P_{MAX} = 20\text{W}$ for all other package devices
 $I_{MAX} = 1.0\text{A}$, $T_J = 25^\circ\text{C}$

Semelab plc. Telephone +44(0)1455 556565. Fax +44(0)1455 552612.


E-mail: sales@semelab.co.uk Website: <http://www.semelab.co.uk>

Prelim. 2/99


APPLICATIONS INFORMATION

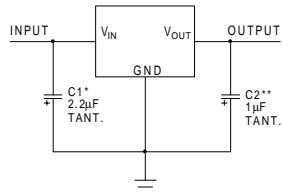

Fixed Output Regulator

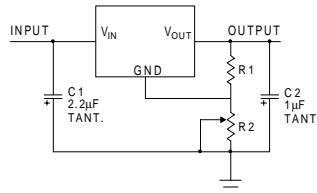

Adjustable Output Regulator

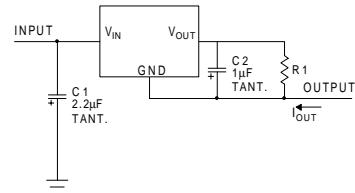

Current Regulator

* Required if the regulator is located far from the power supply.

$$V_{OUT} \approx V_{REG} \frac{(R1+R2)}{R1}$$

$$I_{OUT} = \frac{V_{REG}}{R1} + I_Q$$

** Required for stability. 25μF electrolytic may be substituted.

Order Information

Part Number	K-Pack (TO-3)	R-Pack (TO-66)	G/IG-Pack (TO-257)	SG-Pack SMD1	J-Pack 8 Pin Cerdip	Temp. Range	Note:
IP7900A	✓	✓	✓	✓	✓	-55 to +150°C	To order, add the package identifier to the part number. eg. IP7900AK IP120SG
IP7900	✓	✓	✓	✓	✓	"	
IP120A	✓	✓	✓	✓	✓	"	
IP120	✓	✓	✓	✓	✓	"	
LM120	✓	✓	✓	✓	✓	"	