


Preliminary Datasheet

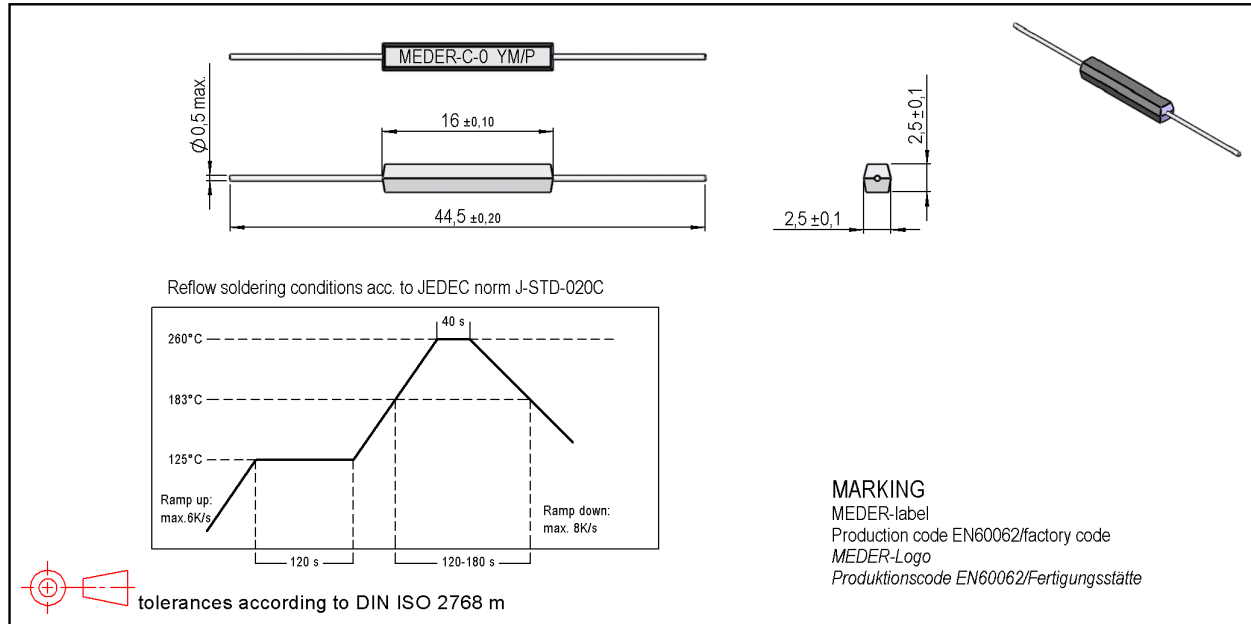

Magnetic properties	Conditions	Min	Typ	Max	Unit
Pull-In excitation (Reference value)	Reed switch unmodified measured in coil- "define operation"	15		20	AT
Test-Coil	Reed switch unmodified	KMS-01			

Contact data 66/3	Conditions	Min	Typ	Max	Unit
Contact-No.		66/3			
Contact-form		A			
Contact-material		Iridium			
Contact rating	Any DC combination of V & A not to exceed their individual max.s			10	W
Switching voltage	DC or Peak AC			200	V
Switching current	DC or Peak AC			0,5	A
Contact resistance static	Measured with 40% overdrive Start Value			100	mOhm
Breakdown voltage (< 20 AT)	according to IEC 255-5	250			VDC

Special Product Data	Conditions	Min	Typ	Max	Unit
Housing material		mineral-filled epoxy			
Approval		UL- File-Nr. E156887			

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			30	g
Vibration	from 10 - 2000 Hz			20	g
Ambient temperature		-40		130	°C
Storage temperature		-50		130	°C
Cleaning		fully sealed			