


Miniature Relays



Vol. 08

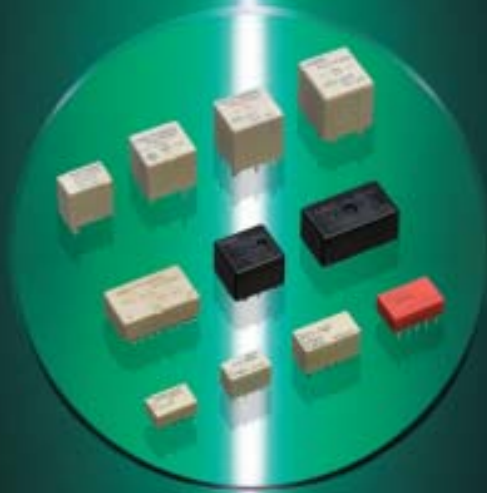

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

The NEC TOKIN's Miniature Relays have evolved in response to various demands.

Communication equipment, measurement instrument, FA equipment, electric home appliances and automotive electronics, and all the rest. In line with the increasing range of functions and downsizing of the various equipments, miniature relays have to respond to the demands of not only high performance and reliability, but also downsizing, low profile and environment resistance.

NEC TOKIN uses the state-of-the-art technologies based on the integration of mechatronics and electronics, and has timely released excellent products. These are Miniature Signal Relays and Power Relays. They are ultra miniature and lightweight, and are suitable for high density packaging. In 2009 NEC TOKIN reached the 4 billion mark in the number of relays shipped and is updating the record daily now.

For various Communication system, For various Automotive electronics system.

Miniature signal relays are used mainly in the field of telecommunications equipments such as the telephone switchboards. However, they are widely used also for the home appliance field such as home telephone, BS tuner and audio-video equipment, for the OA field such as printer and facsimile, and for FA field such as measurement equipment. Miniature power relays are used for various applications in automotive electronics field.

Miniature Signal Relays

Applications

- Telephone switchboards
- Communication terminal equipment
- FA equipment
- Security and alarm equipment



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.


Excellent performance and reliability recognized by customers all over the world.

The most important item of relays is “reliability”. NEC TOKIN’s Miniature Signal Relays are widely used for various communication equipments and measurement instruments which require high reliability of contact performance.


Meanwhile, NEC TOKIN also has successful records in the field of Miniature Power Relays, which have been recognized by many customers of automotive electronics with severe requirements for product quality.

These products are shipped to many customers all over the world from NEC TOKIN’s plants which have received the certifications of international standards of quality management ISO9001, ISO/TS16949 and environmental management ISO 14000.

“Better Products, Better Service” — Reliability supporting the products which create comfortable life. That is NEC TOKIN’s Miniature Relay.

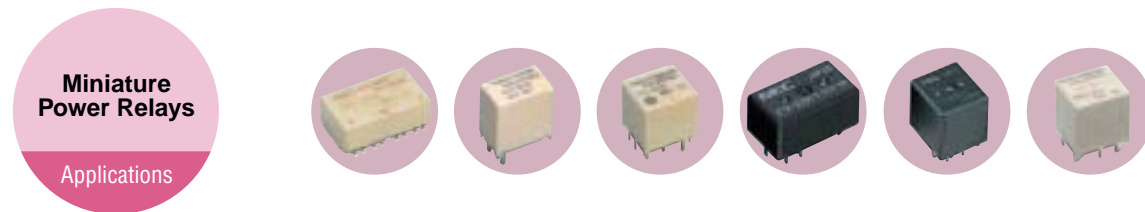

• Automotive electronic systems

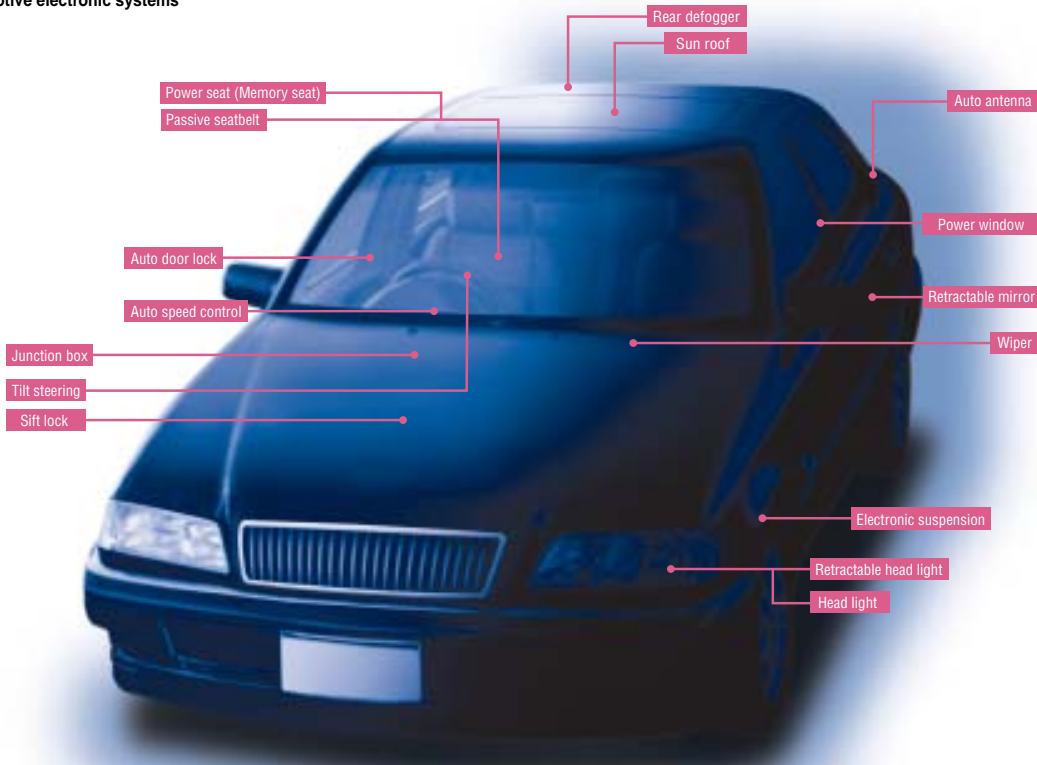

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read “Precautions” and other safety precautions listed in the printed version catalog.

Miniature Relays Lineup



NEC TOKIN provides the best-seller products already used for various applications, and variety of products such as a flat type for low profile mounting, a slim type for high density mounting, low power consumption type and excellent environment resistance type.

<Feature>

- Compact, lightweight, ultra-low profile with high density
- The low power consumption
- Extremely durable plastic sealing
- Small but high withstanding voltage
- Lineup of SMTs (surface mount type) also available

Type of Relay		UA2/UB2	UC2/UD2	EA2	EB2
Mounting height (mm)		8.0±0.3/8.8max.	5.3±0.3/5.45max.	5.4max.	7.5/6.5, 5.6max.
Mounting space (mm × mm)		5.7 × 10.6	6.5 × 10.6	9.2 × 14.2	11.5 × 14.3
Features		<ul style="list-style-type: none"> • Small mounting size of slim package • Bellcore (2500 V) and FCC (1500 V) surge capability • Latching type available • Low power consumption type available 	<ul style="list-style-type: none"> • Low profile type • Bellcore (2500 V surge coil to contacts) and FCC (1500 V) surge capability • Latching type available • Low power consumption type available 	<ul style="list-style-type: none"> • Breakdown voltage 1000VAC FCC Part 68 compliant • Latching type available 	<ul style="list-style-type: none"> • Surface mount type • Breakdown voltage 1000VAC, FCC Part 68 compliant • Latching type available • Reduced mounting space type available
Contact arrangement		2c	2c	2c	2c
Maximum Contact	Power	30W/37.5VA		30W/62.5VA	
	Voltage	220VDC/250VAC		220VDC/250VAC	
	Current [Working]	1A		1A	
Coil	Operating power	100-230mW		100-200mW	
	Nominal voltage	3, 4.5, 5, 9, 12, 24V		3, 4.5, 5, 12, 24V	

Type of Relay		EC2	EE2	ED2	EF2
Mounting height (mm)		9.4max.	10.0-10.6max.	9.4max.	10.0-10.6max.
Mounting space (mm × mm)		7.5 × 15.0	9.5(7.5) × 15.0	7.5 × 15.0	9.5(7.5) × 15.0
Features		<ul style="list-style-type: none"> • 2500V surge coil to contacts • Latching type available 	<ul style="list-style-type: none"> • Reduced mounting space type available • Surface mount type • 2500V surge coil to contacts • Latching type available 	<ul style="list-style-type: none"> • Ultra low power consumption • 2500V surge coil to contacts 	<ul style="list-style-type: none"> • Ultra low power consumption • Reduced mounting space type available • Surface mount type • 2500V surge coil to contacts
Contact arrangement		2c	2c	2c	2c
Maximum Contact	Power	60W/125VA (UL, CSA rating)		30W/62.5VA	
	Voltage	220VDC/250VAC			
	Current [Working]	2A		1A	
Coil	Operating power	100-230mW		30-70mW	
	Nominal voltage	3, 4.5, 5, 9, 12, 24V		1.5, 3, 4.5, 5, 9, 12, 24V	



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.



NEC TOKIN provides various types such as low profile, small mounting area and low power consumption, while realizing large capacity.

<Feature>

- Large capacity for high power switching
- Flux tight housing suitable for automatic soldering dip
- Semi-customizable for use in all types of circuitry, including car electronic systems
- Washable plastic case (sealed type)
- Lineup of miniature twin relays also available
- Reflow soldering type available

Type of Relay		EU2	EX2	EX1	ET2	ET1
Mounting height (mm)		8.0max.	14.2max.	14.2max.	11.0max.	11.0max.
Mounting space (mm × mm)		12.2 × 21.0	12.6 × 14.1	8.0 × 12.6	13.3 × 22.5	13.3 × 14.5
Features		<ul style="list-style-type: none"> • Ultra low profile SMD twin relay for motor reversible control • Light weight • Reflow soldering available 	<ul style="list-style-type: none"> • Ultra miniature twin relay for motor reversible control • Light weight • Small mounting area 	<ul style="list-style-type: none"> • Ultra miniature single relay for motor control • Light weight • Small mounting area 	<ul style="list-style-type: none"> • Miniature twin relay for motor reversible control • Low profile • *ET2F; High heat resistance 	<ul style="list-style-type: none"> • Miniature single relay for motor, heater & solenoid control • Low profile • *ET1F; High heat resistance
Contact arrangement		1c × 2	1c × 2	1c	1c × 2	1c
Maximum Contact	Power	480W	480W		400W	
	Voltage	16VDC	16VDC		16VDC	
	Current [Working]	30A	30A		25A	
Coil	Operating power	960mW	900mW		640mW	
	Nominal voltage	12	12		12	

Type of Relay		EP2	EP1	EP1K	EN2	EQ1	EM1
Mounting height (mm)		16.5max.	16.5max.	17.5max.	17.0max.	15.4max.	16.5max.
Mounting space (mm × mm)		16.7 × 24.3	16.7 × 15.1	16.7 × 15.1	16.5 × 33.5 Discontinued	15.0 × 21.8	12.9 × 14.9
Features		<ul style="list-style-type: none"> • Twin relay for motor reversible control • Symmetrical structure • *EP2F; High heat resistance 	<ul style="list-style-type: none"> • Single relay for motor control • *EP1F; High heat resistance 	<ul style="list-style-type: none"> • Large capacity single relay for motor, heater & solenoid control • Reflow soldering available • High heat resistance 	<ul style="list-style-type: none"> • Twin relay for motor reversible control • Symmetrical structure 	<ul style="list-style-type: none"> • Single relay for motor & lamp control • Small size & Light weight 	<ul style="list-style-type: none"> • Large capacity single relay for lamp, condenser & motor control • Reflow soldering available • High heat resistance
Contact arrangement		1c × 2	1c	1c	1c × 2	1a, 1c	1u
Maximum Contact	Power	480W		640W	560W	480W	640W
	Voltage	16VDC		16VDC	16VDC	16VDC	16VDC
	Current [Working]	30A		40A	35A	30A	40A
Coil	Operating power	480-640mW		640mW	640-1150mw	640-1000mW	640mW
	Nominal voltage	12V		12V	12V	12V	12V



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

The production bases responsible for the superb quality of NEC TOKIN's Miniature Relays.

NEC TOKIN has two production bases — NEC TOKIN Shiroishi Operations and NEC TOKIN Electronics (Philippines) Inc. — that ensure a constant and stable supply of high-quality and highly reliable miniature relays using the most advanced equipment available. Both plants have received ISO9001, ISO/TS16949 and ISO14001 certification.

NEC TOKIN Shiroishi Operations

This is a R&D and production site responsible for developing and designing new products. There is abundant expertise and experience in manufacturing technology. The production line employs state-of-the-art robots and image processing technology to ensure that NEC TOKIN miniature relays achieve maximum efficiency and quality.



NEC TOKIN Electronics (Philippines) Inc.

Established in 1997, this mass production factory boasts the most advanced equipment. The intricate construction of miniature relays requires the highest level of precision for processing and assembly. In order to ensure high quality, the production line is fully automated. The miniature relays produced here are shipped to customers all over the world.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.


NEC TOKIN Miniature Relays keep on evolving.

In order to respond to various needs from customers, NEC TOKIN is creating new products through continuous efforts for downsizing, weight saving, high performance, change of mounting method, and so forth

Ultra small signal relays

U Series


The world's smallest class signal relay for use in telecommunications, FA control, and measuring equipment. UA&UB relays are the ultra-compact type with a mounting area of 60mm². UC&UD relays are the ultra-compact type with low profile of 5.45mm.



Miniature power relays for Automotive electronic systems

EX1, EX2&EU2 relay


These relays are suitable for motor reversible control such as power window and door lock, etc. EX1&EX2 relays are the world's smallest class of mounting area. EU2 relay is the surface mount twin relay with the world's lowest profile (7.8mm).



Miniature power relays for Automotive electronic systems

EP1K relay


EP1K relay is a high heat resistance relay for junction boxes. It is suitable for control of heaters and fans, etc. It was developed based on the EP1 relay, and the performance of carrying current is about 10A larger than the EP1 relay.



Miniature power relays for Automotive electronic systems

EM1 relay

EM1 relay is a high heat resistance relay for junction boxes. It is suitable for large inrush current loads such as lamps and condensers, or heaters and fans. Inrush current of 100A and carrying current of 50A are achieved.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.