


THC Series / TMC Series

(Down sized) (High Reliability)




◆FEATURES

1. Small in size and wide capacitance range.
2. Temperature characteristic is Y5U in EIA code.
3. Superior humidity characteristic and long life.
4. Excellent high frequency characteristic due to low ESR.
5. High rated ripple current.

◆APPLICATIONS

1. Smoothing circuit of small size DC-DC converter.
2. On-board power supply.
3. Noise suppressor for various kinds of equipments.
4. By-pass or decoupling circuits.

◆CONSTRUCTION

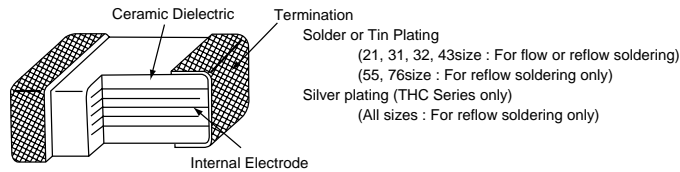

◆RATINGS

1. Category Temperature Range	-55 to +125°C
2. Rated Voltage Range	16, 25, 50, 100, 200V _{dc}
3. Rated Capacitance Range	0.047 to 100μF
4. Rated Capacitance Tolerance	M (±20%) , Z (±80%)
5. Temperature Characteristics	E (JIS) ≒ Y5U (EIA)
6. Rated Ripple Current	See No.5 on the following table

◆SPECIFICATIONS


No.	Items	Specification	Test Condition														
1	Withstand Voltage	No abnormality.	250% of rated voltage shall be applied for 5 seconds.														
2	Insulation Resistance	1000/C _R (MΩ) or 10000(MΩ) whichever is less.	Rated voltage shall be applied for 60±5 seconds at temperature 20±2°C.														
3	Rated Capacitance	Within specified tolerance.	Temperature : 20±2°C Frequency : 1±0.1kHz Voltage : 1±0.2V _{rms}														
4	Dissipation Factor	5.0% maximum.	Temperature : 20±2°C Frequency : 1±0.1kHz Voltage : 1±0.2V _{rms}														
5	Rated Ripple Current	<table border="1"> <tr> <td>Size code</td> <td>21</td> <td>31</td> <td>32</td> <td>43</td> <td>55</td> <td>76</td> </tr> <tr> <td>Arms</td> <td>0.2</td> <td>0.3</td> <td>0.5</td> <td>1.0</td> <td>2.0</td> <td>3.0</td> </tr> </table>	Size code	21	31	32	43	55	76	Arms	0.2	0.3	0.5	1.0	2.0	3.0	10kHz~1MHz (sine curve) Ripple voltage V _p shall be less than the rated voltage.
Size code	21	31	32	43	55	76											
Arms	0.2	0.3	0.5	1.0	2.0	3.0											

◆ SPECIFICATIONS

No.	Items	Specification	Test Condition															
6	Adhesion	No visible damage.	<p>Substrate 5N (0.51kgf) for 10±1 seconds Capacitor</p>															
7	Bend strength of the face plating	Appearance : No visible damage. ΔC/C : ±15%	<p>The substrate shall be bend by 1mm at a rate of 1mm/s for 5 seconds.</p> <p>Press Press ber Substrate Capacitor Support 1.0mm 45±2mm 45±2mm</p>															
8	Solderability	Min. 75% of surface of the termination shall be covered with new solder	<p>Solder Temperature : 235±5°C Dipping Time : 2±0.5 sec. Solder : Eutectic solder containing Ag2.5 to 3wt%</p>															
9	Resistance to Soldering Heat	Appearance : No visible damage. ΔC/C : ±15% D.F. : To meet the initial specification. I.R. : To meet the initial specification. Withstand voltage : No abnormality.	<p>Solder Temperature : 260±5°C Dipping Time : 2±0.5 seconds Solder : Eutectic solder containing Ag2.5 to 3wt%</p>															
10	Temperature Cycle	Appearance : No visible damage. ΔC/C : ±15% D.F. : To meet the initial specification. I.R. : To meet the initial specification. Withstand voltage : No abnormality.	<table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. Category temperature ±3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>3 max.</td> </tr> <tr> <td>3</td> <td>Max. Category temperature ±2</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>3 max.</td> </tr> </tbody> </table> <p><Cycle> THC series : 5 cycles TMC series : 100 cycles</p>	Step	Temperature (°C)	(min.)	1	Min. Category temperature ±3	30±3	2	Room temperature	3 max.	3	Max. Category temperature ±2	30±3	4	Room temperature	3 max.
Step	Temperature (°C)	(min.)																
1	Min. Category temperature ±3	30±3																
2	Room temperature	3 max.																
3	Max. Category temperature ±2	30±3																
4	Room temperature	3 max.																
11	Humidity Load Life	Appearance : No abnormality. ΔC/C : ±20% D.F. : 7% maximum I.R. : 50/C _R (MΩ) or 1000(MΩ) whichever is less. Withstand voltage : No abnormality.	<p>Temperature : 40±2°C Humidity : 90 to 95%RH Voltage : Rated voltage Time : 500±⁴⁸₀hours</p>															
12	Endurance	Appearance : No abnormality. ΔC/C : ±20% D.F. : 7% maximum I.R. : 100/C _R (MΩ) or 1000(MΩ) whichever is less. Withstand voltage : No abnormality.	<p>Temperature : 85±2°C Voltage : 200% of rated voltage. Time : 1000±⁴⁸₀hours</p> <p>Temperature : 125±3°C Voltage : Rated voltage Time : 1000±⁴⁸₀hours</p>															

*C_R : Rated Capacitance(μF)


◆PART NUMBERING SYSTEM

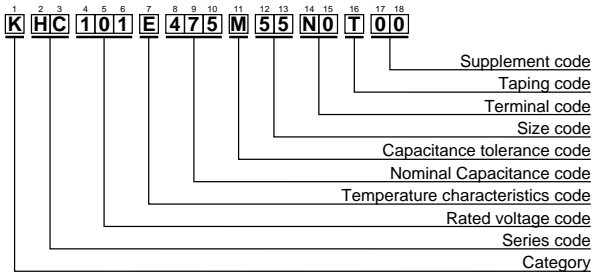

◆THC SERIES STANDARD RATINGS

Part Number	Rated voltage (Vdc)	Rated Capacitance (μF)	Dimensions(mm)				Previous Part Number (Just for your reference)				
			L	W	Tmax.	a					
KHC160E335M31N0T00	16	3.3	3.2±0.2	1.6±0.2	1.6	0.5±0.3	THCS30E1C335MTF				
KHC160E475M31N0T00		4.7					THCS30E1C475MTF				
KHC160E685M32N0T00		6.8					THCS40E1C685MTF				
KHC160E106M32N0T00		10					THCS40E1C106MTF				
KHC160E156M43N0T00		15	4.5±0.3	3.2±0.2	2.2	0.6±0.3	THCS50E1C156MTF				
KHC160E226M43N0T00		22					THCS50E1C226MTF				
KHC160E336M55N0T00		33	5.7±0.3	5.0±0.4	2.2	0.8±0.3	THCS60E1C336MTF				
KHC160E476M55N0T00		47					THCS60E1C476MTF				
KHC160E686M76N0T00		68					7.5±0.5	6.3±0.5	2.5	0.8±0.5	THCS70E1C686MTF
KHC160E107M76N0T00		100							3.0		THCS70E1C107MTF
KHC250E334M21N0T00		25	0.33	2.0±0.2	1.25±0.2	1.25	0.3±0.2	THCS20E1E334MTF			
KHC250E474M21N0T00			0.47					THCS20E1E474MTF			
KHC250E684M21N0T00			0.68					THCS20E1E684MTF			
KHC250E105M31N0T00			1.0					THCS30E1E105MTF			
KHC250E155M31N0T00			1.5	3.2±0.2	1.6±0.2	1.6	0.5±0.3	THCS30E1E155MTF			
KHC250E225M31N0T00			2.2					THCS30E1E225MTF			
KHC250E335M32N0T00	3.3		3.2±0.2	2.5±0.2	2.0	0.6±0.3	THCS40E1E335MTF				
KHC250E475M32N0T00	4.7						THCS40E1E475MTF				
KHC250E685M43N0T00	6.8						THCS50E1E685MTF				
KHC250E106M43N0T00	10						THCS50E1E106MTF				
KHC250E156M43N0T00	15		4.5±0.3	3.2±0.2	3.0	0.6±0.3	THCS50E1E156MTF				
KHC250E226M55N0T00	22				2.2		THCS60E1E226MTF				
KHC250E336M55N0T00	33		5.7±0.4	5.0±0.4	3.0	0.8±0.5	THCS60E1E336MTF				
KHC250E476M76N0T00	47				3.0		THCS70E1E476MTF				
KHC500E104M21N0T00	0.1				2.0±0.2		1.25±0.2	1.25	0.3±0.2	THCS20E1H104MTF	
KHC500E154M21N0T00	0.15									THCS20E1H154MTF	
KHC500E224M21N0T00	0.22	THCS20E1H224MTF									
KHC500E334M31N0T00	0.33	THCS30E1H334MTF									
KHC500E474M31N0T00	0.47	3.2±0.2	1.6±0.2	1.6	0.5±0.3	THCS30E1H474MTF					
KHC500E684M31N0T00	0.68					THCS30E1H684MTF					
KHC500E105M32N0T00	1.0	3.2±0.2	2.5±0.2	2.0	0.6±0.3	THCS40E1H105MTF					
KHC500E155M32N0T00	1.5					THCS40E1H155MTF					
KHC500E225M32N0T00	2.2					THCS40E1H225MTF					
KHC500E335M43N0T00	3.3					THCS50E1H335MTF					
KHC500E475M43N0T00	4.7	4.5±0.3	3.2±0.2	3.0	0.6±0.3	THCS50E1H475MTF					
KHC500E685M55N0T00	6.8			THCS60E1H685MTF							
KHC500E106M55N0T00	10	5.7±0.4	5.0±0.4	2.2	0.8±0.5	THCS60E1H106MTF					
KHC500E156M55N0T00	15			3.0		THCS60E1H156MTF					
KHC500E226M76N0T00	22			2.5		0.8±0.5	THCS70E1H226MTF				
KHC500E104M21N0T00	0.047			2.0±0.2		1.25±0.2	1.25	0.3±0.2	THCS20E2A473MTF		
KHC101E683M21N0T00	0.068	THCS20E2A683MTF									
KHC101E104M31N0T00	0.1	THCS30E2A104MTF									
KHC101E154M31N0T00	0.15	THCS30E2A154MTF									
KHC101E224M31N0T00	0.22	3.2±0.2	1.6±0.2	1.6	0.5±0.3	THCS30E2A224MTF					
KHC101E334M32N0T00	0.33					THCS40E2A334MTF					
KHC101E474M32N0T00	0.47	3.2±0.2	2.5±0.2	2.0	0.6±0.3	THCS40E2A474MTF					
KHC101E684M32N0T00	0.68					THCS40E2A684MTF					
KHC101E105M43N0T00	1.0					4.5±0.3	3.2±0.2	2.2	0.6±0.3	THCS50E2A105MTF	
KHC101E155M43N0T00	1.5							3.0		THCS50E2A155MTF	
KHC101E225M43N0T00	2.2	5.7±0.4	5.0±0.4	3.0	0.8±0.5	THCS50E2A225MTF					
KHC101E335M55N0T00	3.3			2.2		THCS60E2A335MTF					
KHC101E475M55N0T00	4.7			3.0		THCS60E2A475MTF					
KHC101E685M76N0T00	6.8			3.0		THCS70E2A685MTF					
KHC201E473M31N0T00	0.047	3.2±0.2	1.6±0.2	1.6	0.5±0.3	THCS30E2D473MTF					
KHC201E683M31N0T00	0.068					THCS30E2D683MTF					
KHC201E104M32N0T00	0.1					THCS40E2D104MTF					
KHC201E154M32N0T00	0.15					THCS40E2D154MTF					
KHC201E224M32N0T00	0.22	3.2±0.2	2.5±0.2	2.5	0.6±0.3	THCS40E2D224MTF					
KHC201E334M43N0T00	0.33			THCS50E2D334MTF							
KHC201E474M43N0T00	0.47	4.5±0.3	3.2±0.2	3.0	0.6±0.3	THCS50E2D474MTF					
KHC201E684M55N0T00	0.68			THCS60E2D684MTF							
KHC201E105M55N0T00	1.0			5.7±0.4		5.0±0.4	3.0	0.8±0.5	THCS60E2D105MTF		
KHC201E155M76N0T00	1.5						2.2		THCS70E2D155MTF		
KHC201E225M76N0T00	2.2	7.5±0.5	6.3±0.5	3.0	0.8±0.5	THCS70E2D225MTF					

◆PART NUMBERING SYSTEM

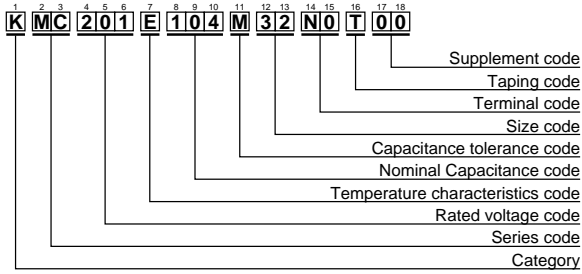

◆TMC SERIES STANDARD RATINGS

Part Number	Rated voltage (Vdc)	Rated Capacitance (μF)	Dimensions(mm)				Previous Part Number (Just for your reference)
			L	W	Tmax.	a	
KMC250E684M31N0T00	25	0.68	3.2±0.2	1.6±0.2	1.6	0.4±0.2	TMCS30E1E684MTF
KMC250E105M31N0T00		1					TMCS30E1E105MTF
KMC250E155M31N0T00		1.5					TMCS30E1E155MTF
KMC250E225M32N0T00		2.2	3.2±0.2	2.5±0.2	2.2	0.5±0.2	TMCS40E1E225MTF
KMC250E335M32N0T00		3.3					TMCS40E1E335MTF
KMC250E475M43N0T00		4.7	4.5±0.3	3.2±0.2	2.5	0.5±0.3	TMCS50E1E475MTF
KMC250E685M43N0T00		6.8					TMCS50E1E685MTF
KMC250E106M43N0T00		10			3.0		TMCS50E1E106MTF
KMC500E334M31N0T00		0.33			3.2±0.2		1.6±0.2
KMC500E474M31N0T00		0.47	TMCS30E1H474MTF				
KMC500E684M32N0T00	0.68	3.2±0.2	2.5±0.2	2.2	0.5±0.2	TMCS40E1H684MTF	
KMC500E105M32N0T00	1.0					TMCS40E1H105MTF	
KMC500E155M32N0T00	1.5			TMCS40E1H155MTF			
KMC500E225M43N0T00	2.2	4.5±0.3	3.2±0.2	2.5	0.5±0.3	TMCS50E1H225MTF	
KMC500E335M43N0T00	3.3					TMCS50E1H335MTF	
KMC500E475M43N0T00	4.7			3.0		TMCS50E1H475MTF	
KMC101E104M31N0T00	0.1			3.2±0.2		1.6±0.2	1.6
KMC101E154M31N0T00	0.15	TMCS30E2A154MTF					
KMC101E224M32N0T00	0.22	TMCS30E2A224MTF					
KMC101E334M32N0T00	0.33	3.2±0.2	2.5±0.2	2.2	0.5±0.2	TMCS40E2A334MTF	
KMC101E474M32N0T00	0.47					TMCS40E2A474MTF	
KMC101E684M43N0T00	0.68	4.5±0.3	3.2±0.2	2.5	0.5±0.3	TMCS50E2A684MTF	
KMC101E105M43N0T00	1.0					TMCS50E2A105MTF	
KMC101E155M43N0T00	1.5			3.0		TMCS50E2A155MTF	
KMC201E333M31N0T00	0.033			3.2±0.2		1.6±0.2	1.6
KMC201E473M31N0T00	0.047	TMCS30E2D473MTF					
KMC201E683M32N0T00	0.068	3.2±0.2	2.5±0.2	2.2	0.5±0.2	TMCS40E2D683MTF	
KMC201E104M32N0T00	0.1					TMCS40E2D104MTF	
KMC201E154M32N0T00	0.15			2.5		TMCS40E2D154MTF	
KMC201E224M43N0T00	0.22	4.5±0.3	3.2±0.2	2.5	0.5±0.3	TMCS50E2D224MTF	
KMC201E334M43N0T00	0.33					3.0	TMCS50E2D334MTF
KMC201E474M43N0T00	0.47			3.0		TMCS50E2D474MTF	