

XC74UL08AA



CMOS Logic

- ◆ CMOS 2-Input AND Gate
- ◆ High Speed Operation : tpd=2.6ns TYP
- ◆ Operating Voltage Range : 2V~5.5V
- ◆ Low Power Consumption : 1μA (max)

General Description


The XC74UL08AA is a 2-input CMOS AND gate, manufactured using silicon gate CMOS fabrication.

CMOS low power circuit operation makes high speed LS-TTL operations achievable.

With a wave forming buffer connected internally, stabilized output can be achieved as the circuit offers high noise immunity.

As the XC74UL08AA is integrated into mini molded, SSOT-25 and SOT-25 packages, high density mounting is possible.

Pin Configuration

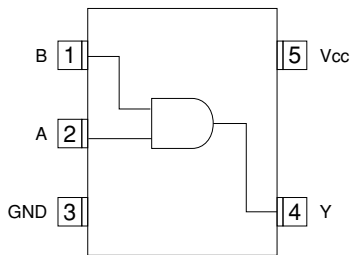

SSOT-25/SOT-25
(TOP VIEW)

Applications

- Palmtops
- Digital Equipment

Features

- High Speed Operation : tpd=2.6ns TYP
- Operating Voltage Range : 2V~5.5V
- Low Power Consumption : 1μA (max)
- Ultra Small Package : SSOT-25 and SOT-25

Function

INPUT		OUTPUT
A	B	Y
L	L	L
L	H	L
H	L	L
H	H	H

H=High level, L=Low level

Absolute Maximum Ratings

Ta=-40°C~85°C

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	Vcc	-0.5 ~ +6.0	V
Input Voltage	VIN	-0.5 ~ +6.0	V
Output Voltage	VOUT	-0.5 ~ Vcc+0.5	V
Input Diode Current	IiK	-20	mA
Output Diode Current	Iok	±20	mA
Output Current	IOUT	±25	mA
Vcc ,GND Current	Icc, IgND	±50	mA
Continuous Total Power Dissipation (Ta=55°C)	Pd	150	mW
Storage Temperature	Tstg	-65 ~ +150	°C

Note: Voltage is all Ground standardized.

XC74UL08AA

Recommended Operating Conditions

PARAMETER	SYMBOL	V _{CC} (V)	CONDITIONS	UNITS
Supply Voltage	V _{CC}	-	2 ~ 5.5	V
Input Voltage	V _{IN}	-	0 ~ 5.5	V
Output Voltage	V _{OUT}	-	0 ~ V _{CC}	V
Operating Temperature	T _{opr}	-	-40 ~ +85	°C
Output Current	I _{OH}	3.0	-4	mA
		4.5	-8	
	I _{OL}	3.0	4	
		4.5	8	
Input Rise and Fall Time	t _r , t _f	3.3	0 ~ 100	ns
		5.0	0 ~ 20	

DC Electrical Characteristics


PARAMETER	SYMBOL	V _{CC} (V)	CONDITIONS	T _a =25°C			T _a =-40~85°C		UNITS			
				MIN	TYP	MAX	MIN	MAX				
Input Voltage	V _{IH}	2.0		1.5	-	-	1.5	-	V			
		3.0		2.1	-	-	2.1	-				
		5.5		3.85	-	-	3.85	-				
	V _{IL}	2.0		-	-	0.5	-	0.5	V			
		3.0		-	-	0.9	-	0.9				
		5.5		-	-	1.65	-	1.65				
Output Voltage	V _{OH}	2.0	V _{IN} =V _{IH}	I _{OH} =50μA	1.9	2.0	-	1.9	-	V		
		3.0			2.9	3.0	-	2.9	-			
		4.5			4.4	4.5	-	4.4	-			
		3.0		I _{OH} =4mA	2.58	-	-	2.48	-			
		4.5			I _{OH} =8mA	3.94	-	-	3.80		-	
	V _{OL}	2.0		V _{IN} =V _{IH} or V _{IL}		I _{OL} =50μA	-	-	0.1	-	0.1	V
		3.0			-		-	0.1	-	0.1		
		4.5			I _{OL} =4mA		-	-	0.36	-	0.44	
		3.0					I _{OL} =8mA	-	-	0.36	-	
4.5												
Input Current	I _{IN}	5.5	V _{IN} =V _{CC} or GND		-0.1	-	0.1	-1.0	1.0	μA		
Quiescent Supply Current	I _{CC}	5.5	V _{IN} =V _{CC} or GND, I _{OUT} =0μA		-	-	1.0	-	10.0			

Switching Electrical Characteristics


PARAMETER	SYMBOL	CL	V _{CC} (V)	CONDITIONS	T _a =25°C			T _a =-40~85°C		UNITS
					MIN	TYP	MAX	MIN	MAX	
Propagation Delay Time	t _{PLH}	15pF	3.3		-	3.7	8.8	1.0	10.5	ns
			5.0		-	2.8	5.9	1.0	7	
		50pF	3.3		-	5.2	12.3	1.0	14	ns
			5.0		-	3.7	7.9	1.0	9	
	t _{PHL}	15pF	3.3		-	3.2	8.8	1.0	10.5	ns
			5.0		-	2.4	5.9	1.0	7	
		50pF	3.3		-	4.5	12.3	1.0	14	ns
			5.0		-	3.4	7.9	1.0	9	
Input Capacitance	C _{IN}	-	5.0	V _{IN} =V _{CC} or GND	-	4	10	-	10	pF
Power Dissipation Capacitance	C _{pd}	-	-	No Load, f=1MHz	-	9.3	-	-	-	pF

t_r=t_f=3ns

■ Waveforms

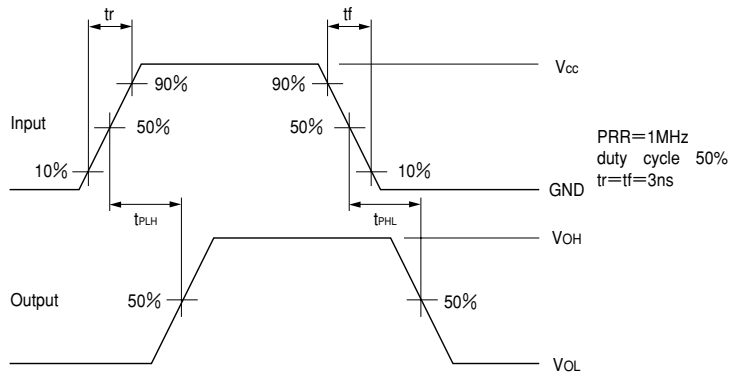

■ Typical Application Circuit

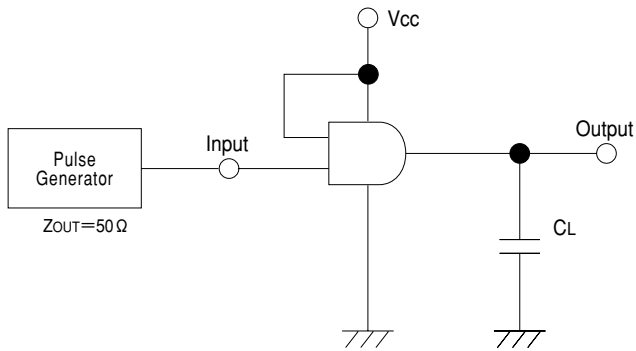

Note: Open output when measuring supply current