

ABSOLUTE MAXIMUM RATINGS
(25°C unless otherwise specified)

Storage Temperature	_____	-40°C to +125°C
Operating Temperature	_____	-25°C to +100°C
Lead Soldering Temperature		
(1/16 inch (1.6mm) from case for 10 secs)		260°C

INPUT DIODE

Forward Current	_____	50mA
Reverse Voltage	_____	6V
Power Dissipation	_____	70mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV_{CEO}	_____	70V
Emitter-collector Voltage BV_{ECO}	_____	6V
Power Dissipation	_____	150mW

POWER DISSIPATION

Total Power Dissipation	_____	170mW
(derate linearly 2.67mW/°C above 25°C)		


ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)		1.2	1.65	V	$I_F = 50\text{mA}$
	Reverse Current (I_R)			10	μA	$V_R = 4\text{V}$
Output	Collector-emitter Breakdown (BV_{CEO}) (Note 2)	70			V	$I_C = 1\text{mA}$
	Emitter-collector Breakdown (BV_{ECO})	6			V	$I_E = 100\mu\text{A}$
	Collector-emitter Dark Current (I_{CEO})			50	nA	$V_{CE} = 10\text{V}$
Coupled	Current Transfer Ratio (CTR) (Note 2)					
	IS201, ISD201, ISQ201	75			%	$10\text{mA } I_F, 10\text{V } V_{CE}$
	IS201, ISD201, ISQ201	10			%	$1\text{mA } I_F, 10\text{V } V_{CE}$
	IS202, ISD202, ISQ202	125		250	%	$10\text{mA } I_F, 10\text{V } V_{CE}$
	IS202, ISD202, ISQ202	30			%	$1\text{mA } I_F, 10\text{V } V_{CE}$
	IS203, ISD203, ISQ203	225		450	%	$10\text{mA } I_F, 10\text{V } V_{CE}$
	IS203, ISD203, ISQ203	50			%	$1\text{mA } I_F, 10\text{V } V_{CE}$
	IS204, ISD204, ISQ204	200		400	%	$10\text{mA } I_F, 10\text{V } V_{CE}$
	IS204, ISD204, ISQ204	100			%	$1\text{mA } I_F, 10\text{V } V_{CE}$
	Collector-emitter Saturation Voltage $V_{CE(SAT)}$		0.2	0.4	V	$10\text{mA } I_F, 2\text{mA } I_C$
	Input to Output Isolation Voltage V_{ISO}	5300			V_{RMS}	See note 1
	7500			V_{PK}	See note 1	
Input-output Isolation Resistance R_{ISO}	5×10^{10}			Ω	$V_{IO} = 500\text{V}$ (note 1)	
Output Turn on Time t_{ON}		3.0		μs	$I_F = 10\text{mA}$	
Output Turn off Time t_{OFF}		2.5		μs	$V_{CE} = 5\text{V}, R_L = 75\Omega$	


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.


Collector Power Dissipation vs. Ambient Temperature

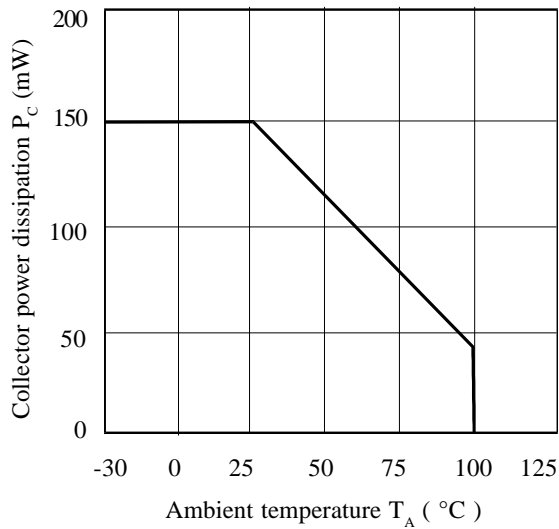


Relative Current Transfer Ratio vs. Ambient Temperature

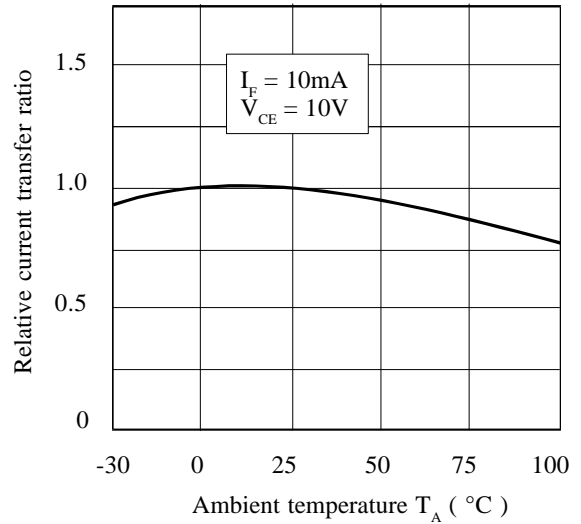


Forward Current vs. Ambient Temperature

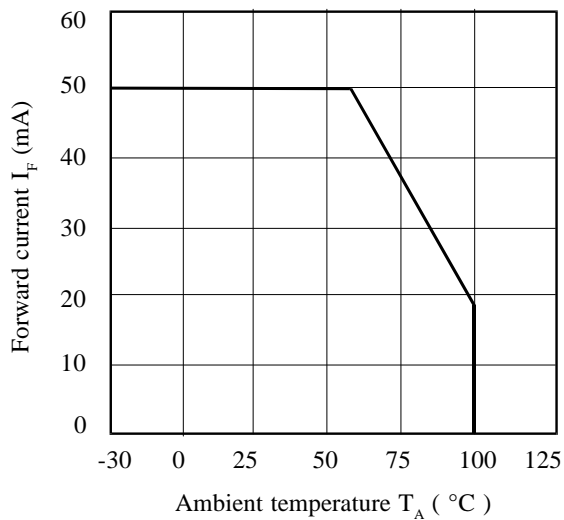

Relative Current Transfer Ratio vs. Ambient Temperature

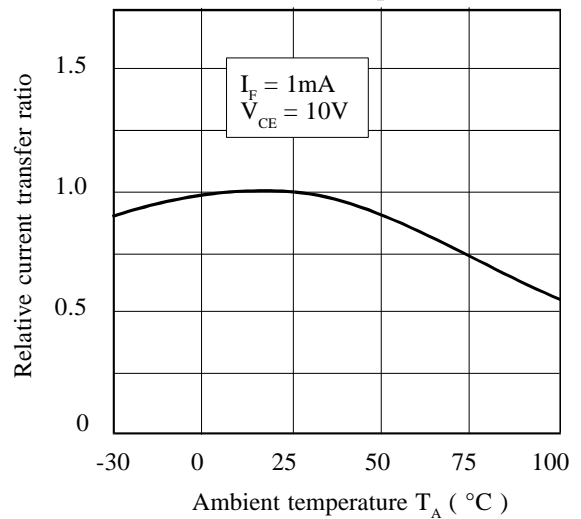

Collector-emitter Saturation Voltage vs. Ambient Temperature

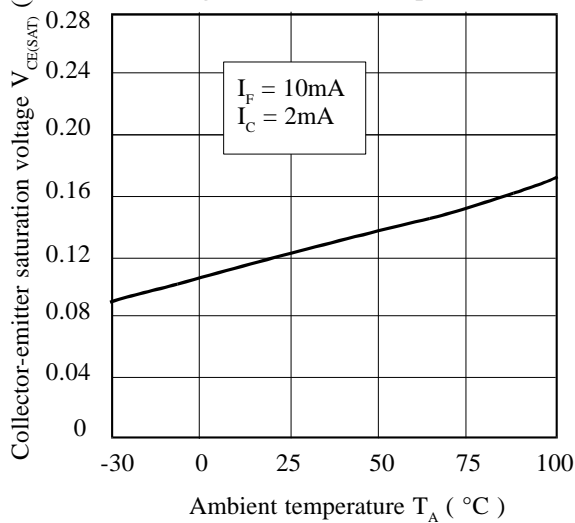

Relative Current Transfer Ratio vs. Forward Current

