


TPA2029NND03-HF (PNP)

RoHS Device
Halogen Free





Features

- PNP Epitaxial Silicon Transistor.
- Excellent hFE linearity.
- For portable equipment(i.e. Mobile phone,MP3, (i.e. Mobile phone, MP3, Note book PC, etc.)

Mechanical data

- Case: WBFBP-03B Plastic-Encapsulate Diodes
- Mounting position: Any
- Weight: 0.003 grams.

Circuit Diagram

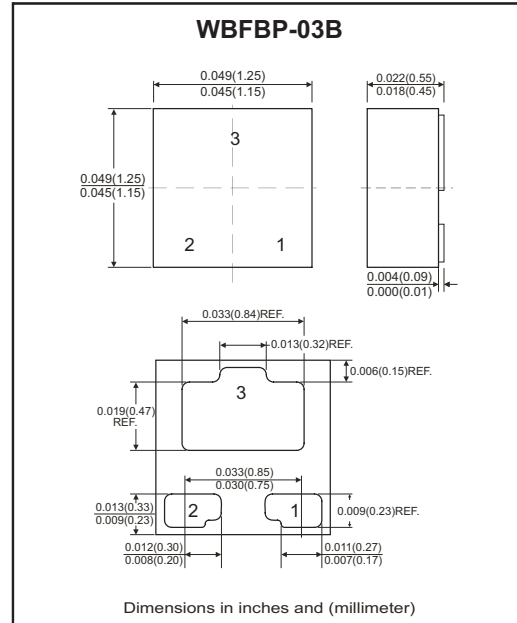

Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	Min	Typ	Max	Unit
Collector-Base voltage	V _{CB0}			-60	V
Collector-Emitter voltage	V _{CEO}			-50	V
Emitter-Base voltage	V _{EBO}			-6	V
Collector Current-Continuous	I _c			-150	mA
Collector Power Dissipation	P _c			150	mW
Storage temperature and junction temperature	T _{STG} , T _J	-55		+150	°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector-Base breakdown voltage	V _{(BR)CBO}	I _c = -50μA , I _E =0	-60			V
Collector-Emitter breakdown voltage	V _{(BR)CEO}	I _c = -1mA , I _B =0	-50			V
Emitter-Base breakdown voltage	V _{(BR)EBO}	I _E = -50μA , I _c =0	-6			V
Collector cut-off current	I _{cBO}	V _{CB} = -60V , I _E =0			-0.1	μA
Emitter cut-off current	I _{EBO}	V _{EB} = -6V , I _c =0			-0.1	μA
DC current gain	h _{FE}	V _{CE} = -6V , I _c = -1mA	120		560	
Collector-Emitter saturation voltage	V _{CE(sat)}	I _c = -50mA , I _B = -5mA			-0.5	V
Transition frequency	f _T	V _{CE} = -12V , I _c = -2mA f=30MHz		140		MHz
Collector output capacitance	C _{ob}	V _{CB} = -12V , I _E =0 , f=1MHz		4	5	pF

Classification on hFE

Rank	Q	R	S
Range	120-270	180-390	270-560

RATING AND CHARACTERISTIC CURVES (TPA2029NND03-HF)

Fig.1 - Static Characteristic

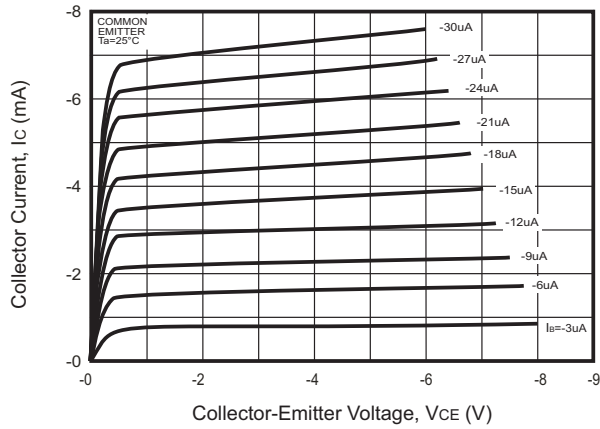


Fig.2 - $h_{FE} - I_c$

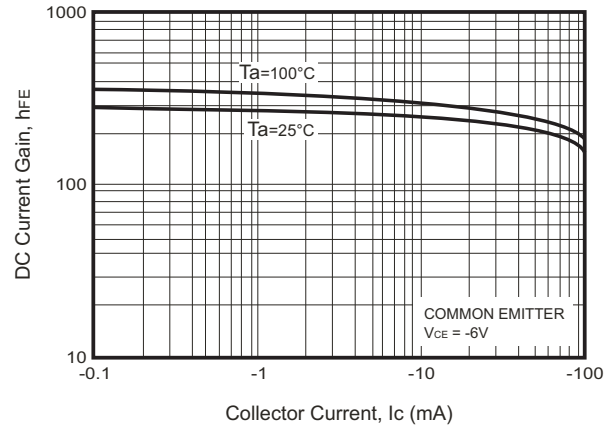


Fig.3 - $V_{BEsat} - I_c$

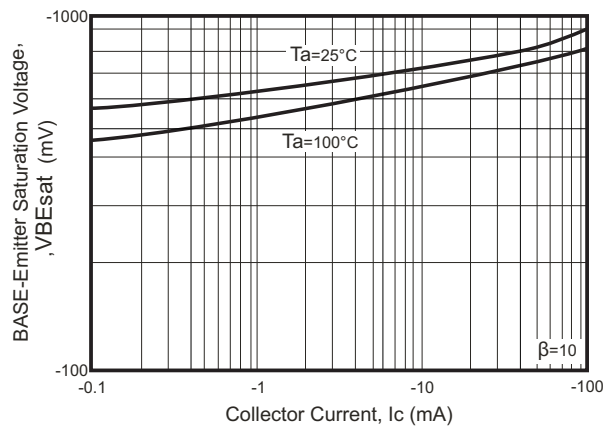


Fig.4 - $V_{CEsat} - I_c$

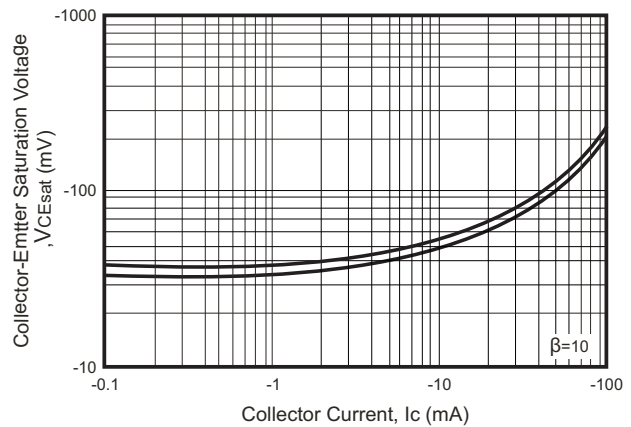


Fig.5 - $I_c - V_{BE}$


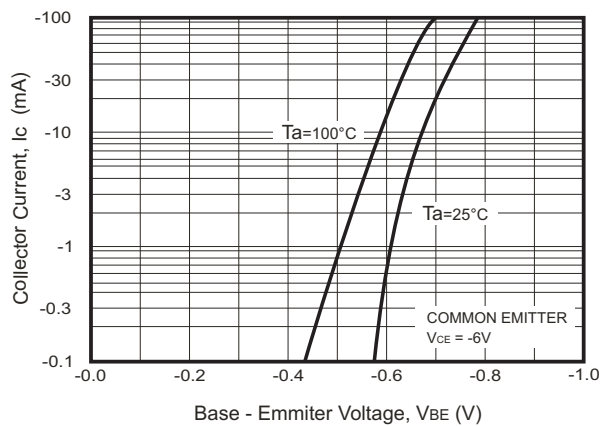


Fig.6 - $f_r - I_c$

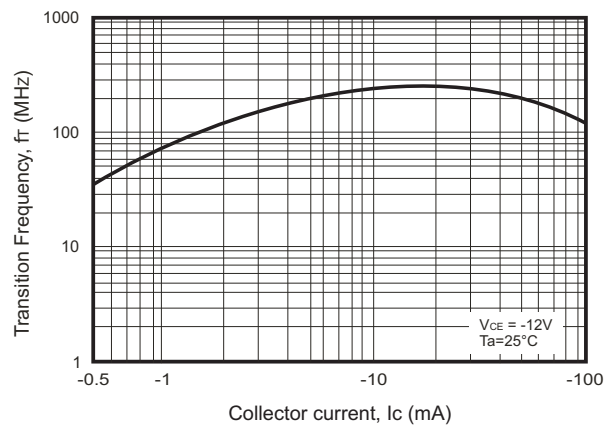

RATING AND CHARACTERISTIC CURVES (TPA2029NND03-HF)

Fig.7 - C_{ob}/C_{ib} — V_{CB}/V_{EB}





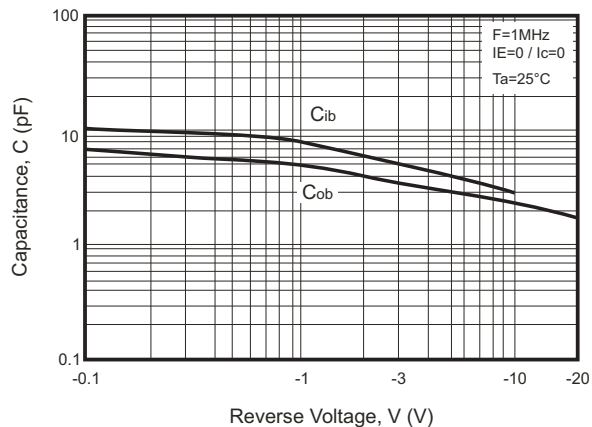


Fig.8 - P_c — T_a

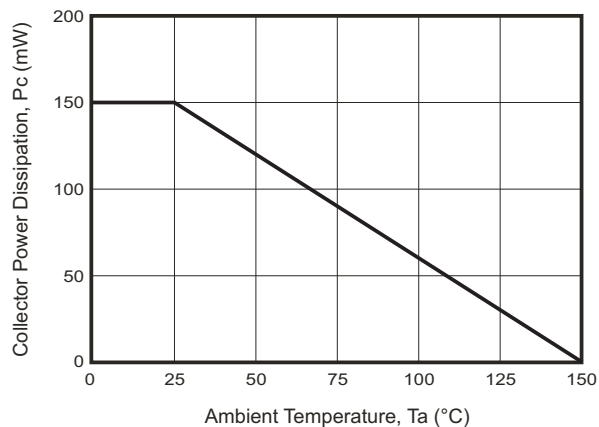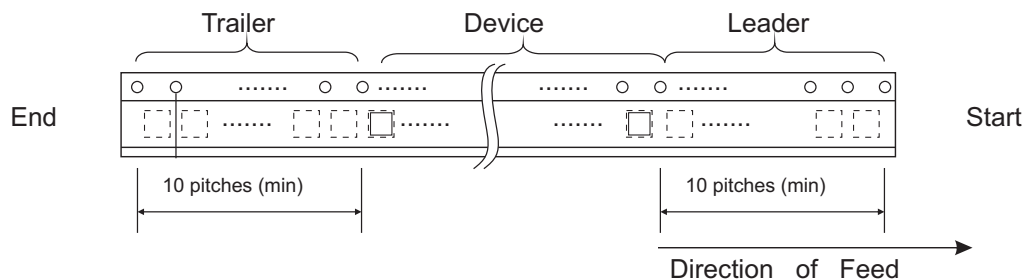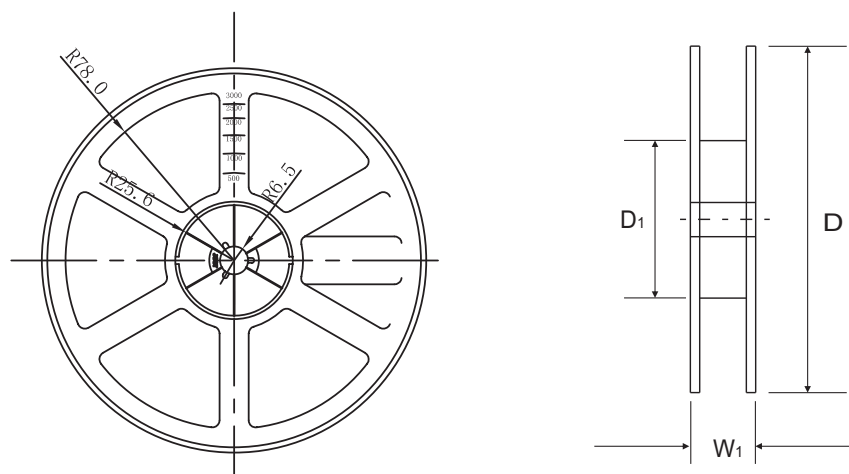

Reel Taping Specification

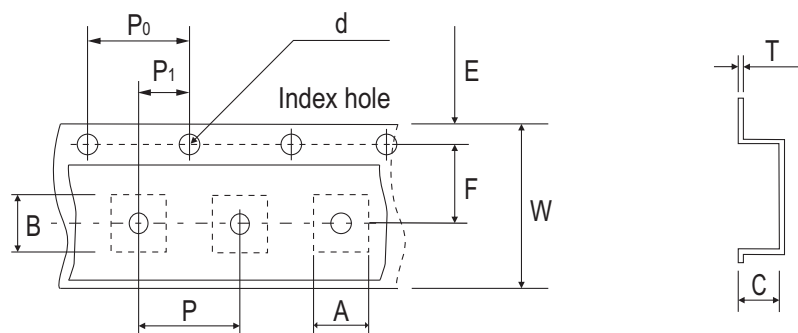


WBFBP-03B	SYMBOL	A	B	C	d	D	D1	T
	(mm)	1.38 ± 0.05	1.38 ± 0.05	0.62 ± 0.05	1.50 ± 0.10	178 (MAX)	54.40 (MAX)	0.20 ± 0.02
	(inch)	0.054 ± 0.002	0.054 ± 0.002	0.024 ± 0.002	0.059 ± 0.004	7.008 (MAX)	2.142 (MAX)	0.008 ± 0.001

WBFBP-03B	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 ± 0.20 / - 0.10	9.50 (MAX)
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.315 ± 0.008 / - 0.004	0.374 (MAX)

Marking Code


Part Number	Rank	Marking Code
TPA2029NND03Q-HF	Q	FQ
TPA2029NND03R-HF	R	FR
TPA2029NND03S-HF	S	FS



X = Product type marking code

Suggested PAD Layout

SIZE	WBFBP-03B	
	(mm)	(inch)
A	0.48	0.019
B	0.32	0.013
C	0.15	0.006
D	0.80	0.031
E	0.85	0.033
F	1.20*1.20 PKG.	0.047*0.047 PKG.

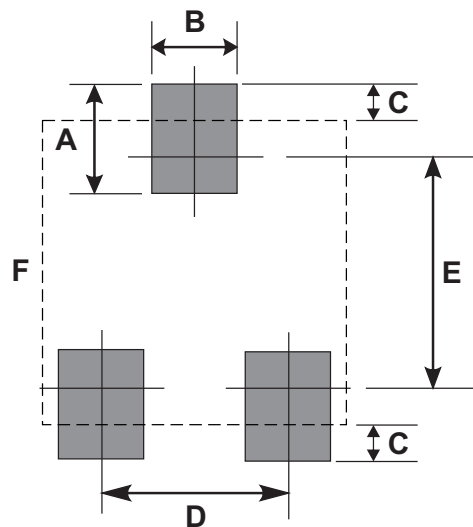

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
WBFBP-03B	5,000	7