




MF2M thru MF10M / MF2S thru MF10S

Miniature Glass Passivated Single-Phase Bridge Rectifiers
Reverse Voltage 200 to 1000 Volts Forward Current 1.0 Ampere


Features

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ High surge overload rating: 40A peak
- ◆ Saves space on printed circuit boards
- ◆ Recommended for non-automotive applications

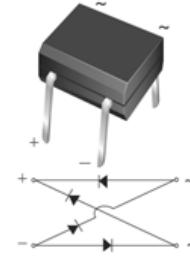

Mechanical Data

- ◆ Case: MFxM (MBM), MFxS (MBS)
Molded plastic body over passivated junctions
- ◆ Terminals: Plated leads solderable per MIL-STD-750,
Method 2026
- ◆ Mounting Position: Any
- ◆ Weight: 0.078 oz., 0.22 g



Maximum Ratings and Electrical Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbols	MF2M MF2S	MF4M MF4S	MF6M MF6S	MF8M MF8S	MF10M MF10S	Units
Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	Volts
Maximum average forward output rectified current (see Fig.1)	$I_{F(AV)}$			1.0			Amp
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}			40.0			Amps
Rating for fusing ($t < 8.3\text{ms}$)	$I_f t$			5.0			A^2sec
Maximum instantaneous forward voltage drop per leg at 0.4A	V_F			1.1			Volt
Maximum DC reverse current at $T_A = 25^\circ\text{C}$ rated DC blocking voltage per leg $T_A = 125^\circ\text{C}$	I_R			5.0 100			μA
Typical thermal resistance per leg	R_{QJA} R_{QJA} R_{QUL}			85 ⁽¹⁾ 70 ⁽²⁾ 20 ⁽¹⁾			$^\circ\text{C}/\text{W}$
Typical junction capacitance per leg ⁽³⁾	C_J			13			pF
Operating junction and storage temperature range	T_J, T_{STG}			-55 to +150			$^\circ\text{C}$

- Notes:**
1. On glass epoxy P.C.B. mounted on $0.05 \times 0.05"$ ($1.3 \times 1.3\text{mm}$) pads
 2. On aluminum substrate P.C.B. with an area of $0.8 \times 0.8"$ ($20 \times 20\text{mm}$) mounted on $0.05 \times 0.05"$ ($1.3 \times 1.3\text{mm}$) solder pad
 3. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

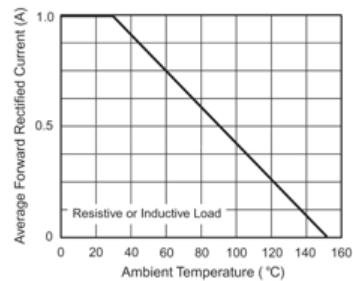


Figure 1. Derating Curve for Output Rectified Current

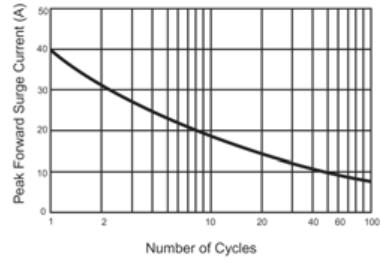


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

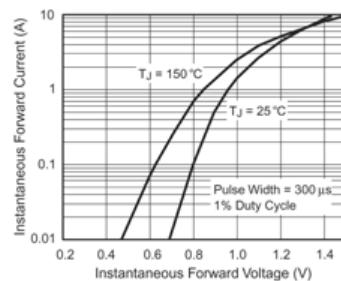


Figure 3. Typical Forward Voltage Characteristics Per Leg

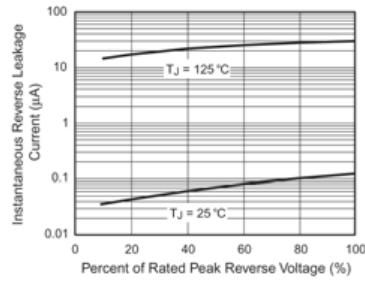


Figure 4. Typical Reverse Leakage Characteristics Per Leg


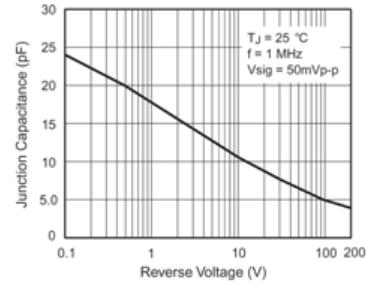


Figure 5. Typical Junction Capacitance Per Leg



Package outline dimensions in inches (millimeters)

MBM

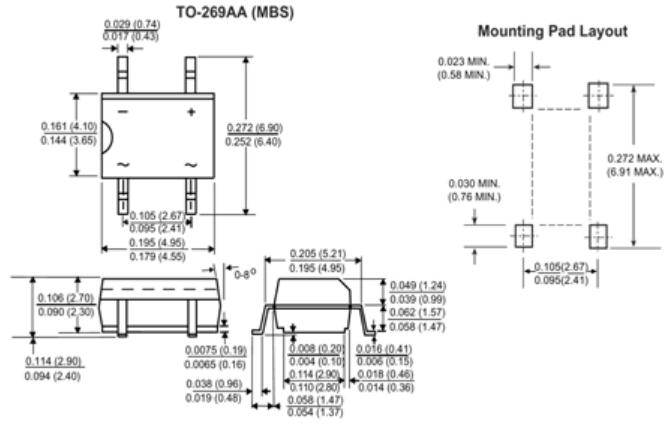