



Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

# TIP41/41A/41B/41C

## Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- The complementary PNP types are the TIP42 respectively
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking : Part Number

## Silicon NPN Power Transistors

### Absolute Maximum Ratings @ T<sub>J</sub> = 25°C (unless otherwise noted)


Symbol	Parameter	Value	Unit
V <sub>CB0</sub> TIP41 TIP41A TIP41B TIP41C	Collector-base voltage (Open emitter)	40 60 80 100	V
V <sub>CE0</sub> TIP41 TIP41A TIP41B TIP41C	Collector-emitter voltage (Open base)	40 60 80 100	V
V <sub>EBO</sub>	Emitter-base Voltage (Open collector)	5	V
I <sub>C</sub>	Collector Current	6	A
I <sub>CM</sub>	Collector Current Pulse	10	A
I <sub>B</sub>	Base Current	2	A
P <sub>C</sub>	Total Device Dissipation(T <sub>a</sub> =25°C)	2	W
	Total Device Dissipation(T <sub>c</sub> =25°C)	65	W
T <sub>J</sub>	Junction Temperature	150	°C
T <sub>STG</sub>	Storage Temperature Range	-65 to +150	°C

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
V <sub>CE0(SUS)</sub> TIP41 TIP41A TIP41B TIP41C	Collector-emitter sustaining voltage (I <sub>C</sub> =30mA; I <sub>B</sub> =0)	40 60 80 100		V
V <sub>CE(sat)</sub>	Collector-emitter Saturation Voltage (I <sub>C</sub> =6A; I <sub>B</sub> =0.6A)		1.5	V
V <sub>BE</sub>	Base-emitter Voltage (I <sub>C</sub> =6A; V <sub>CE</sub> =4V)		2.0	V
I <sub>CES</sub> TIP41 TIP41A TIP41B TIP41C	Collector cut-off current (V <sub>CE</sub> =40V; V <sub>EB</sub> =0) (V <sub>CE</sub> =60V; V <sub>EB</sub> =0) (V <sub>CE</sub> =80V; V <sub>EB</sub> =0) (V <sub>CE</sub> =100V; V <sub>EB</sub> =0)	0.4		mA
I <sub>CEO</sub> TIP41/41A TIP41B/C	Collector cut-off current (V <sub>CE</sub> =30V; V <sub>EB</sub> =0) (V <sub>CE</sub> =60V; V <sub>EB</sub> =0)	0.7		mA
I <sub>EBO</sub>	Emitter cut-off current (V <sub>EB</sub> =5V; I <sub>C</sub> =0)		1.0	mA
h <sub>fe</sub>	DC current gain (I <sub>C</sub> =0.3A; V <sub>CE</sub> =4V) (I <sub>C</sub> =3A; V <sub>CE</sub> =4V)	30 15	75	
f <sub>T</sub>	Transition frequency (I <sub>C</sub> =0.5A; V <sub>CE</sub> =10V)	3		MHZ

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

## TO-220

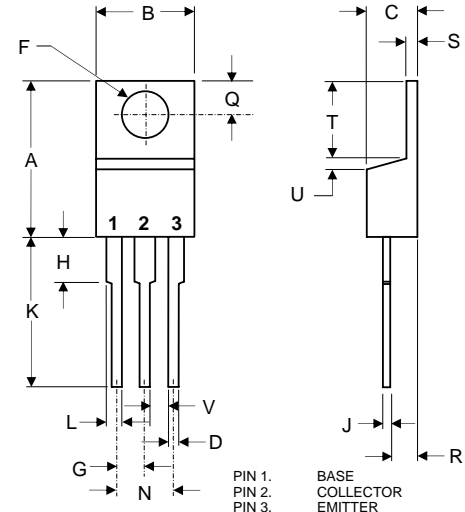

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.140	.190	3.56	4.82	
D	.020	.045	0.51	1.14	
F	.139	.161	3.53	4.09	∅
G	.190	.110	2.29	2.79	
H	---	.250	---	6.35	
J	.012	.025	0.30	0.64	
K	.500	.580	12.70	14.73	
L	.045	.060	1.14	1.52	
N	.190	.210	4.83	5.33	
Q	.100	.135	2.54	3.43	
R	.080	.115	2.04	2.92	
S	.045	.055	1.14	1.39	
T	.230	.270	5.84	6.86	
U	-----	.050	-----	1.27	
V	.045	-----	1.15	-----	



Micro Commercial Components

## Ordering Information

Device	Packing
(Part Number)-BP	Bulk;1Kpcs/Box

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserve the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .  
*Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

---

[www.mccsemi.com](http://www.mccsemi.com)