


# 12,500 V - 25,000 V Rectifier Stacks

0.5 A Forward Current  
150 ns Recovery Time


**SP125F SP150F**  
**SP200F SP250F**



## ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V <sub>rwm</sub> )	Average Rectified Current (in oil) (I <sub>o</sub> )		Reverse Current @ V <sub>rwm</sub> (I <sub>r</sub> )		Forward Voltage (V <sub>f</sub> )		1 Cycle Surge Current t <sub>p</sub> =8.3ms (I <sub>fsm</sub> )	Repetitive Surge Current (I <sub>frm</sub> )	Reverse Recovery Time (1) (T <sub>rr</sub> )	Case Length (L)
		55°C	100°C	25°C	100°C	25°C		25°C	25°C	25°C	
	Volts	Amps	Amps	µA	µA	Volts	Amps	Amps	Amps	ns	in.
SP125F	12500	0.5	0.33	1.0	25	24.0	1.0	40	8	150	4.250
SP150F	15000	0.5	0.33	1.0	25	24.0	1.0	40	8	150	4.250
SP200F	20000	0.5	0.33	1.0	25	32.0	1.0	40	8	150	4.250
SP250F	25000	0.5	0.33	1.0	25	40.0	1.0	40	8	150	4.250

(1)T<sub>rr</sub> Testing: I<sub>f</sub>=0.5A, I<sub>r</sub>=1.0A, I<sub>rr</sub>=0.25A \*Op. Temp.= -55°C to +150°C Stg. Temp.= -55°C to +150°C

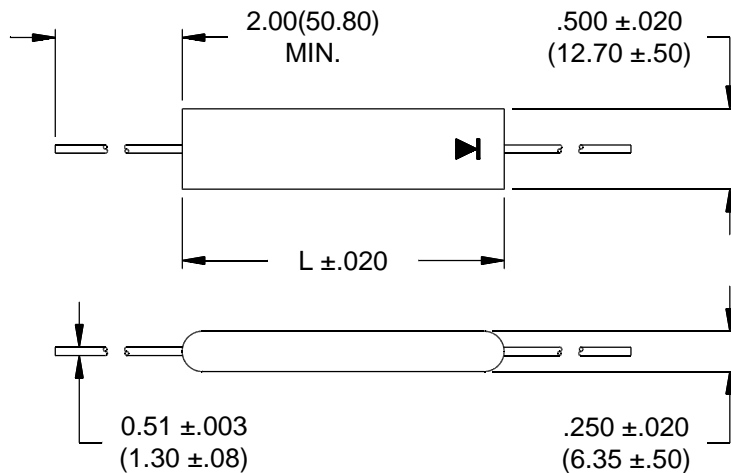

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



**VOLTAGE MULTIPLIERS INC.**  
8711 W. Roosevelt Ave.  
Visalia, CA 93291

TEL 559-651-1402  
FAX 559-651-0740  
www.voltagemultipliers.com

# SP125F SP150F SP200F SP250F

