


# MTA and MTB Series

**MMD**  
COMPONENTS

Full-Size (7.3mm or 4.7mm height)

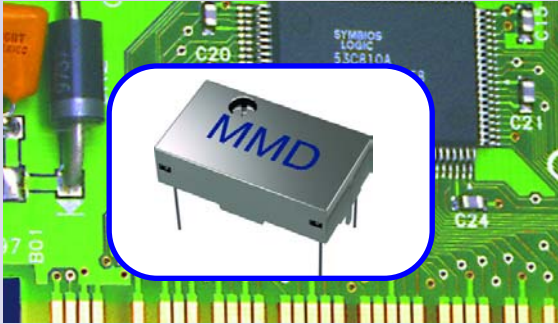

- **Industry Standard Package**
- **5.0 or 3.3 Volt**
- **HCMOS, Sinewave, Clipped Sine**
- **1.000MHz to 1.000GHz**
- **Stability Down to  $\pm 1$ ppm**

## Electrical Specifications

H Option = HCMOS Output	Frequency Range	1.000MHz to 160.000MHz
	Frequency Stability	Down to $\pm 1$ ppm
	Load	10K Ohms // 15pF
	Supply Current	35mA max
S Option = Clipped Sine Output	Output	Logic"1" Level = 0.9Vdd min. Logic"0" Level = 0.1Vdd max.
	Frequency Range	8.000MHz to 300.000MHz
	Frequency Stability	Down to $\pm 1$ ppm
	Load	10K Ohms // 15pF
Z Option = Sinewave Output	Supply Current	3mA max.
	Output	1.0V p-p min.
	Sinewave Output	8.000MHz to 1.000GHz
	Frequency Stability	Down to $\pm 1$ ppm
Operating Temperature Range	Load	50 Ohms
	Supply Current	5mA max.
	Output	7dBm min.
	See Part Numbering Guide	
Storage Temperature Range		-40°C to +85°C
Supply Voltage (Vdd)	Vdd = 5V	5.0Vdc $\pm 5\%$
	Vdd = 3.3V	3.3Vdc $\pm 5\%$
Internal Trim (Top of can)		$\pm 3$ ppm min.
Control Voltage	Vdd = 5V	2.5Vdc $\pm 2.0$ Vdc Positive Slope
	Vdd = 3.3V	1.65Vdc $\pm 1.5$ Vdc Positive Slope
Pin 1 Connection	Blank	No Connect
	V Option	$\pm 10$ ppm min.
Frequency Stability	vs. Aging	$\pm 1$ ppm per year max.
	vs. Voltage (with a 5% change)	$\pm 0.3$ ppm
	vs. Load (with a 10% change)	$\pm 0.3$ ppm
Symmetry	@50% of waveform w/CMOS load	40/60%

*Notes*

[www.mmdcomp.com](http://www.mmdcomp.com)


Toll Free 1-877-663-2667 / Fax: 949-753-5889

OS15


Specifications subject to change without notice

Revision: 9/20/02 B

## Part Numbering Guide

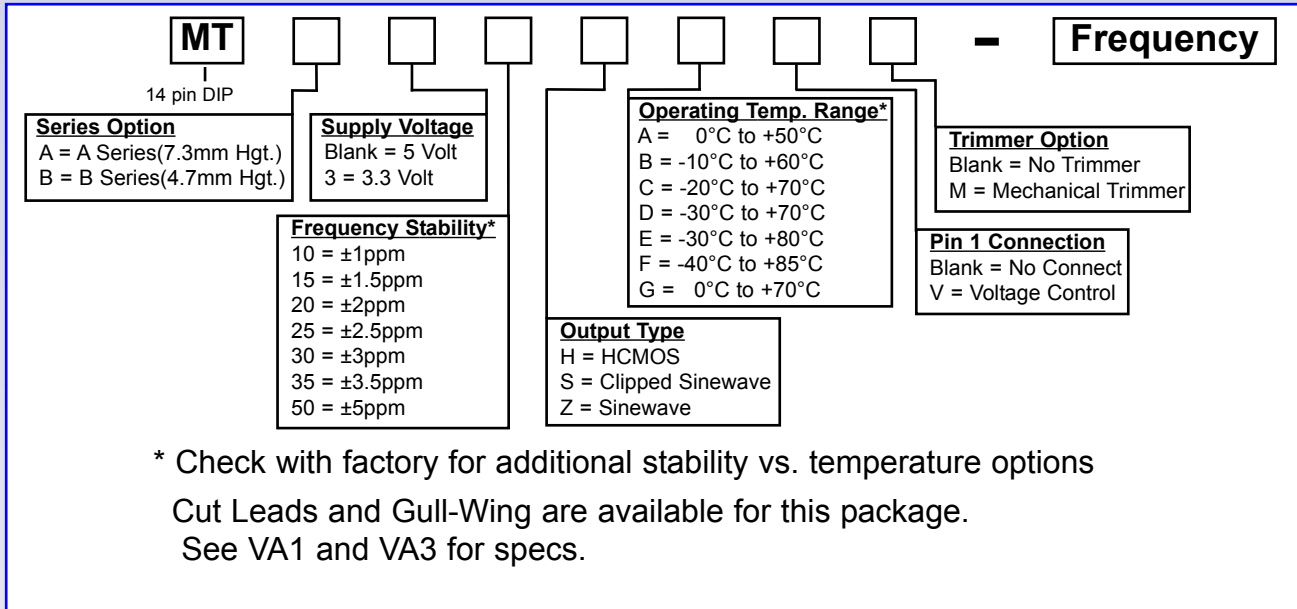

### Mechanical Dimensions

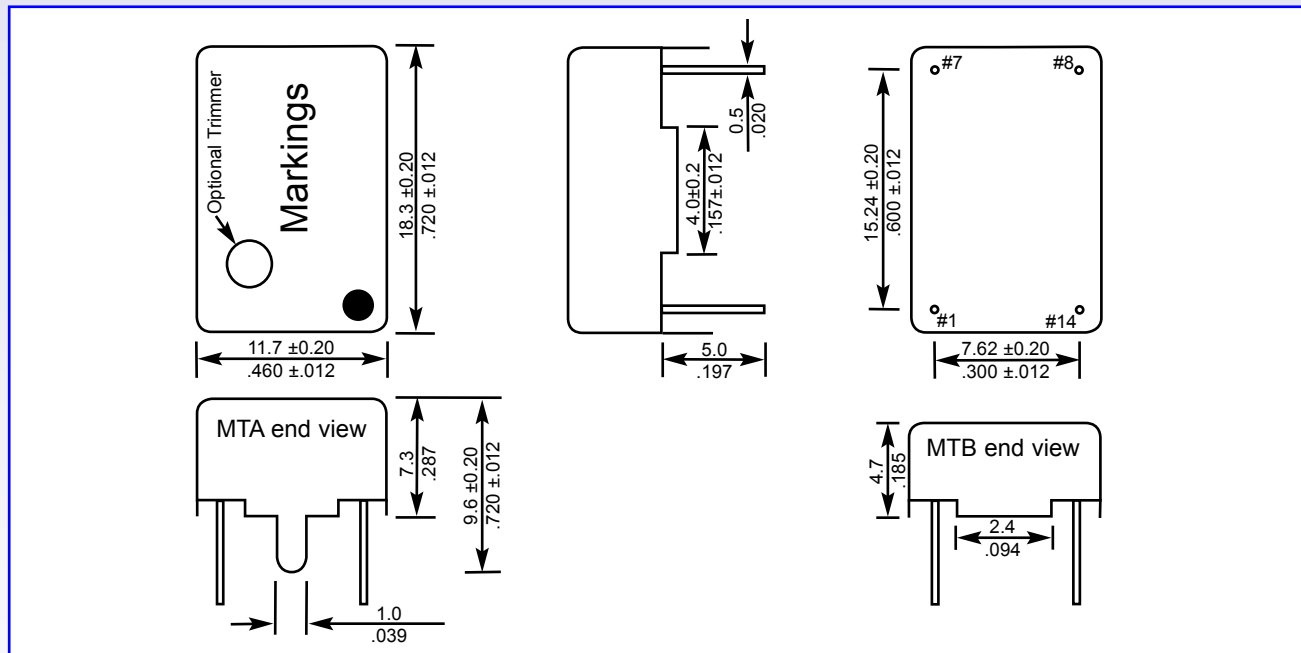

### Pin Connections

Pin 1: Control Voltage or N/C  
Pin 7: Case Ground  
Pin 8: Output  
Pin 14: Supply Voltage

### Markings

Line 1: MMD  
Line 2: Part Number  
Line 3: Frequency  
Line 4: Date Code