

E-Series 4-Way 0° Power Divider

5 - 1000 MHz

ESJ-4-1-75

V3.00

Features

- 4 Way
- 0°
- Surface Mount

Specifications @ 25°C

Frequency Range	5 - 1000 MHz		
Insertion Loss	Typical	Maximum	
	5 - 50 MHz	0.6 dB	0.9 dB
	50 - 500 MHz	0.7 dB	1.2 dB
	500 - 1000 MHz	1.0 dB	2.0 dB
Isolation	Typical	Minimum	
	5 - 50 MHz	30 dB	20 dB
	50 - 500 MHz	30 dB	20 dB
	500 - 1000 MHz	21 dB	13 dB
Amplitude Unbalance	Maximum		
	5 - 50 MHz	0.1 dB	
	50 - 500 MHz	0.3 dB	
	500 - 1000 MHz	0.7 dB	
Phase Unbalance	Maximum		
	5 - 50 MHz	1°	
	50 - 500 MHz	5°	
	500 - 1000 MHz	10°	
Return Loss	Typical	Minimum	
	Input	17 dB	12 dB
	Output	17 dB	14 dB

Operating Characteristics

Impedance	75 Ohms Nominal
-----------	-----------------


Ordering Information

Part No.	Packaging
ESJ-4-1-75	Tube
ESJ-4-1-75TR	Forward Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temperature (10 sec)	260°C
Storage Temperature	-55°C to 100°C

SM-46

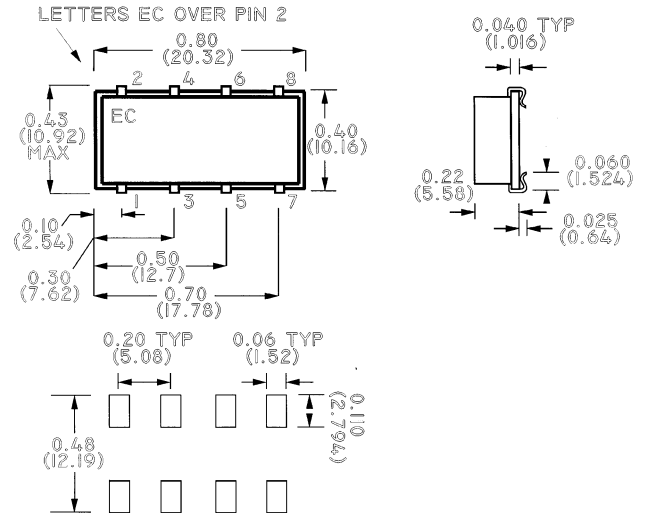

SUGGESTED FOOTPRINT

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin No.
Ground	1,5,7
Input	3
Port 1	2
Port 2	4
Port 3	6
Port 4	8

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020

1

S 0994 C