

# Self-driven Piezo Transducer




• **TFM-24**



**FEATURES:**


- Small And Light
- Compact Structure
- High Reliabilit

**DIMENSIONS: (Unit: mm)**

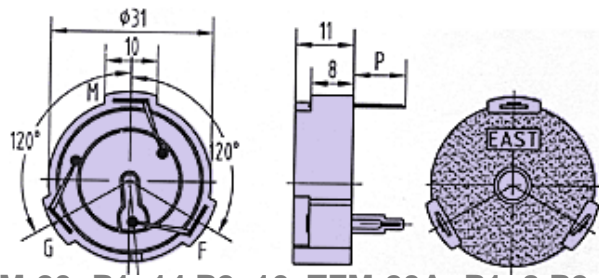


TFM-20: P1=14 P2=10, TFM-20A: P1=8 P2=3.5

**CHARACTERISTICS:**

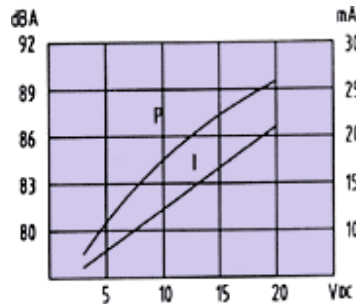

**TEST CIRCUIT:**

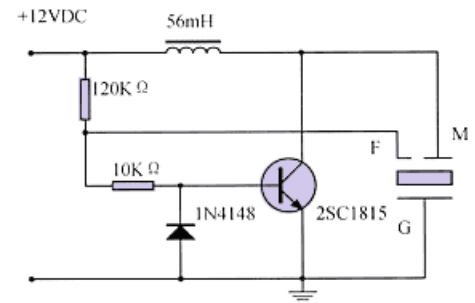

Model	TFM-24	TFM-24A
P	3.5	9.5

ELECTRICAL SPECIFICATIONS :	
<b>Model No.</b>	<b>TFM-24(24A)</b>
Min. Sound Pressure Level (dB)	75 /12V <sub>DC</sub> /100cm
Max. Consumption (mA)	16 /12V <sub>DC</sub>
Resonant Frequency (kHz)	3.0 ± 0.5
Operating Voltage (V <sub>DC</sub> )	3 ~ 20
Operating Temperature (°C)	-20 ~ +70
Weight (g)	5
Case Material/Colour	PC/Black
PACKING INFORMATION :	
Packing:	900 pcs per export carton
Carton Size:	47 X 30.5 X 35 cm
G. Weight:	6.0 kgs
N. Weight:	4.5 kgs