

## SWG30 SERIES

DC/AC single output ring generator



[ 2 YEAR WARRANTY ]

- 30VA of ringer output power
- Short circuit protection
- Operating temperature up to 70°C
- Internal sine wave reference
- Remote ON/OFF control

Measuring just 4.00 x 4.00 x 0.63 inches, the SWG30 design maximizes efficiency, typically 80% at full load. Operating from any input voltage in the range 40 to 60VDC, the SWG30 features indefinite short circuit protection and overcurrent protection features, and has a high MTBF of 300,000 hours (calculated in accordance with MIL-HDBK-217F) to ensure reliable operation. A remote on/off control feature facilitates easy systems integration. The SWG30 ring generator has a typical input current of 780mA, and a maximum output current of 400mA rms, (260mA peak DC current). The series features line and load regulation of 1% and at full load the maximum output ripple is typically less than 5V peak-to-peak. The unit has a wide operating temperature range of 0°C to +70°C and the black coated copper case material meets flammability standard UL94V-0. The SWG30 has an isolation voltage of 500VDC and an internal sine-wave reference oscillator.

### SPECIFICATION All specifications are typical at nominal input, full load at 25°C unless otherwise stated

OUTPUT SPECIFICATIONS		
Nominal voltage	75VAC, 85VAC, 95VAC	
Voltage accuracy	±3.0%	
Load regulation (static)	No load to full load	±1.0%
Line regulation	±1.0%	
Load impedance	SWG30-48S75C01	188Ω
	SWG30-48S85C01	284Ω
	SWG30-48S90C01	270Ω
	Capacitive load (See Note 2)	30VA
Output frequency	25Hz, ±2Hz	
Maximum output current	See table	
Output ripple and noise	Full load	5V pk-pk
Output ripple frequency	Full load	240kHz, nominal
Total harmonic distortion	5.0% max.	
Voltage range	±3V	
DC offset	±2V max.	
INPUT SPECIFICATIONS		
Input voltage range	48VDC nominal	40 to 60VDC
Input current	1.1A max. @ 40VDC	
Input filter	Pi network	
Input undervoltage (output clipped)	48VDC input model	38VDC max.
Reference input impedance	Internal sine-wave reference oscillator	
Remote ON/OFF	(See Note 4)	

INPUT NOISE SPECIFICATIONS		
Conducted noise	VDE0871, FCC part 15 (Note 7) Level A	
GENERAL SPECIFICATIONS		
Efficiency	Resistive load	See table
Isolation voltage	500VDC	
Switching frequency	Fixed	120kHz, typical
Case material	Black coated copper	
Material flammability	UL94V-0	
Weight	230g (8.12oz)	
MTBF	Demonstrated	300,000 hours
ENVIRONMENTAL SPECIFICATIONS		
Thermal performance	Operating temperature ambient (See Note 1)	0°C to +70°C Derate 2.5%/°C after 50°C, under Free air convection cooled
	Non-operating Cooling	-40°C to +85°C Free air convection cooled
Relative humidity	Non-condensing	10% to 95% RH

# 30VA DC/AC ring generator


INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT FREQUENCY	OUTPUT CURRENT (RMS)	PEAK OUTPUT DC CURRENT <sup>(5)</sup>	TYPICAL EFF. (MIN)	MODEL NUMBER <sup>(4)</sup>
48VDC	75VAC	25Hz	400mA	260mA	75%	SWG30-48S75C01
48VDC	85VAC	25Hz	350mA	160mA	70%	SWG30-48S85C01
48VDC	90VAC	25Hz	333mA	180mA	70%	SWG30-48S90C01

### Notes

- The SWG30 can operate up to 70°C as long as the maximum case temperature does not exceed 85°C.
- The output loading power factor should be greater than 0.85.
- Measured under resistive load condition at nominal input voltage.
- All models are available with the suffix 'P' e.g. **SWG30-48S75C01/P**. Models with the suffix 'P' have the same specifications as their corresponding models, except the remote on/off control logic is reversed.
- Peak output DC current is the DC biased current flowing through the output. Maximum duration is 1 second.
- FG pin (pin 5) must be connected to +Vin or -Vin (pins 3 or 4) directly or through a capacitor greater than 10µF.
- To meet VDE0871 level A conducted noise, connect a capacitor with a value >47µF between (+Vin) and (-Vin).

PROTECTION	
Short circuit protection	Indefinite
Short circuit input current	48VDC, 120mA max.
Overvoltage protection	None
Overcurrent protection set point	600 to 650mA
Undervoltage protection	None

PIN CONNECTIONS	
PIN NUMBER	FEATURE
1	+ Vin
2	+ Vin
3	- Vin
4	- Vin
5	FG <sup>(6)</sup>
6	Remote ON/OFF
7	+ Vout
8	+ Vout
9	- Vout
10	- Vout
11	No Connection

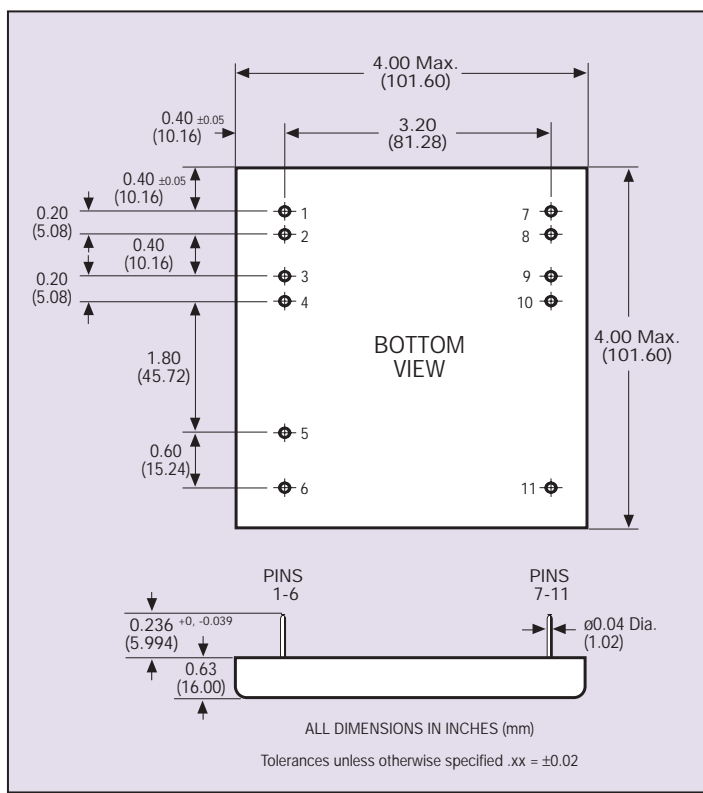

MODEL <sup>(4)</sup>	REMOTE PIN CONNECTION	OUTPUT
SWG30-48SXXC01	Open Circuit	ON
	≤0.4V reference to -Vin	OFF
SWG30-48SXXC01/P	+Vin	ON
	Open Circuit	OFF

6

# 30VA DC/AC ring generator

## Application notes

### 1 Examples of DC biased operation.

**1.1 Non-biased operation.**

Resistive / capacitive loading

$$\text{power factor} = \frac{1}{\sqrt{1 + \left( \frac{1}{2\pi f C R_1 + \frac{(1 + R_1/R_2)}{2\pi f C R_2}} \right)^2}}$$

**1.2 Negative DC Biased operation.**

capacitive loading  
(See note 5 for DC biased current condition)

$$\text{power factor} = \frac{1}{\sqrt{1 + \left( \frac{1}{2\pi f C R} \right)^2}}$$

**1.3 Positive DC biased operation.**

capacitive loading  
(See note 5 for DC biased current condition)

Data Sheet © Artesyn Technologies® 2000  
 The information and specifications contained in this data sheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.