

EPC

EPC-7510F

Slim and Fanless Embedded PC

Features and Benefits:

- Truly Fanless Operation
- All-in-one cables-less Design
- Dual independent Display
- General Purpose I/O
- Lockable Serial ATA Connector
- Embedded OS Support
- Anti-Shock and Vibration Design



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: sales@protech.com.tw


<http://www.protech.com.tw>




ISO CERTIFIED
9001 14001

EPC-7510F *Slim and Fanless Embedded PC*


Top View

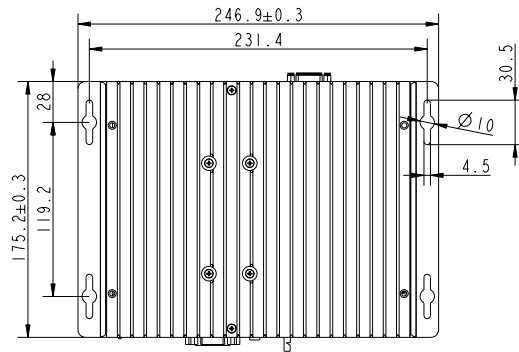

Front View

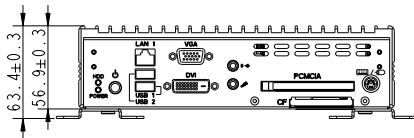

Rear View



Unit: mm

Specification

System	
CPU Type	Celeron® M ULV 1.0 GHz
Chipset	Intel® 915GM/GME+ICH6M
Memory Support	1 x DDRII SO-DIMM Socket (up to 2GB)
Watchdog	1~255 secs Watchdog timer selectable w / Reset / NMI
Power Supply	100W ATX/90W AT Power Supply
Power Adaptor	AC 100V~240V input, DC 24V 2-pin output (optional)
Operation System	Windows 2000 / XP / XP-E (SP2), Windows CE. NET 4.2/5.0
System Weight	2.2 kg
Dimension (WxHxD)	216mm x 56.9mm x 175.2mm

I/O Ports (Front side)

HDD	SATA 2.5" uDOC (support by optional)
USB	2 x USB 2.0 Type-A Connector
Keyboard / Mouse	1 x PS/2 port for keyboard and mouse
PCMCIA	1 x PCMCIA cardbus slot
LAN	1 x 10/100/1000 Mbps LAN (Marvell 88E8052)
CF	1 x CF type II slot (IDE interface)
DVI	1 x DVI port. (resolution up to 1920x1200 60Hz max)
Audio	1 x Mic-in, SPK-out (Line-in by jumper setting)

I/O Ports (Rear side)

Serial Port	2 x COM port, all for R232, +5V
LAN	1 x 10/100 Mbps LAN (Intel 82562)
IEEE	1 x IEEE 1394a port

Environment

Operating Temp.	0° ~ 40° C
Storage Temp.	- 20° ~ 70° C
Humidity	20% ~ 90%
Anti-Vibration	MIL-STD-810F
Anti-shock	50G, IEC60068-2-27, 11ms duration

Ordering Information

EPC7510F-AB	Fanless/ Celeron® M ULV 1GHz w/o L2 cache CPU + 1 x VGA + 1 x DVI + 1 x PCMCIA + 1 x 1394a + 100W ATX DC power + 2-pin phoenix type power connector (black)
EPC7510F-CB	Fanless/ Celeron® M ULV 1GHz w/o L2 cache CPU + 1 x VGA + 1 x DVI + 1 x PCMCIA + 1 x 1394a + 90W AT DC power + 2-pin phoenix type power connector (black)
52-002-05120001	24VDC power adaptor output with 2-pin phoenix type connector

Certificate: CE, FCC CLASS A

* CPU, AT Power, SDRAM, HDD are available as optional items.

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Feb. 2008