


PCI-6881

PCI Intel® Pentium® M/Intel Celeron® M PCI Half-sized SBC with VGA/LCD/LVDS/ GbE LAN/USB 2.0 and SSD

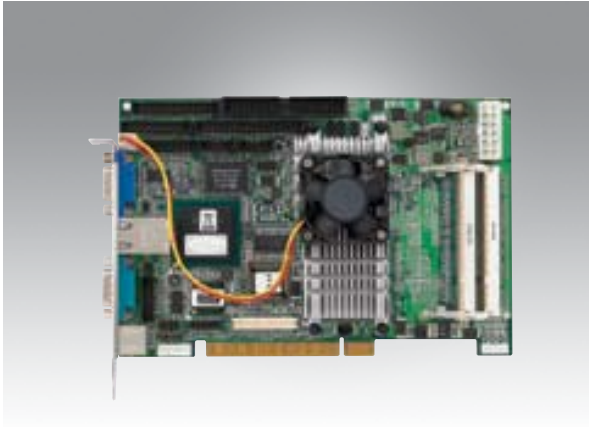

Features


- Supports Intel® Pentium® M/Intel Celeron® M Processor
- Fanless operation @ 0 ~ 60° C
- Supports 400 MHz Front Side Bus
- Supports 200 MHz, 266 MHz and 333 MHz DDR SDRAM
- Supports up to 2 Channel 36 bits LVDS for LCD
- Supports four USB 2.0 ports
- Supports Enhanced Intel SpeedStep Technology (Intel Pentium M)
- Fanless version available with onboard Intel Celeron M 600 MHz

Specifications

Processor System	CPU	Intel Pentium M/ Celeron M(Socket)	Intel Celeron M (on board type)
	Max. Speed	2.1 GHz & above (400 FSB)	600 MHz
	L2 Cache	1 M/ 2 M	512 KB
	Chipset	Intel 855 GME + ICH4	
Bus	BIOS	AWARD 4 Mbit FWH	
	Front Side Bus	400 MHz	
	PCI	32-bit/ 33 MHz	
Memory	ISA	-	
	Technology	DDR 200/266/333 MHz SDRAM SODIMM	
	Max. Capacity	2GB	
Graphics	Socket	200-pin SO-DIMM x 2	
	Controller	Chipset integrated VGA controller	
	VRAM	Dynamically shared system memory, 8-64 MB	
	LVDS	Dual-channel 36-bit LVDS	
Ethernet	TTL	-	
	Dual Display	CRT + LVDS	
EIDE	Interface	10/100 Base-T	
	Controller	Intel 82551ER (FE)	
	Connector	RJ-45*1	
SATA (150MB/s)	Mode	ATA 100/66/33	
	Channel	2 (Max. 4 devices)	
I/O Interface	port	-	
	USB	Max. 4 (USB 2.0 compliant)	
	Serial	3 (RS-232)/ 1 (RS-232/RS-422/RS-485)	
	Parallel	1	
	FDD	1	
Watchdog Timer	PS/2	1 (for mouse and Keyboard, Y cable included)	
	Output	Interrupt, system reset	
Miscellaneous	Interval	Programmable, 1-255 sec.	
	Audio Output	AC97 Audio interface (requires an audio extension module P/N: PCM-231A-00A1E)	
	Solid State Disk	Compact Flash socket (Type I/II), shared with secondary IDE	
Power Requirement	Typical	Pentium M 1.6 GHz, 512 MB SDRAM SODIMM	
	Max	+12 V (0.25 A)	+5 V (5.2 A)
		Pentium M 1.6 GHz, 512 MB SDRAM SODIMM	
Environment		+12 V (0.5 A)	+5 V (6 A)
	Temperature	Operating	Non-Operating
Physical		0 ~ 60° C	- 20 ~ 70° C
	Dimensions	185 mm (L) x 122 mm (W) (7.3" x 4.8")	

Computer On Modules	1
Embedded Single Board Computers	2
Compact Embedded Computers	3
Pre-configured Systems	4
Industrial Motherboards	5
Slot Single Board Computers	6
Industrial Computer Chassis	7
Industrial Computer Peripherals	8
Panel PCs	9
Display Solutions	10
Digital Video Solutions	11
Vehicle Mounted Computers	12
Portable Computers	13
M2M Modules	14
Embedded Software Services	15

Board Diagram

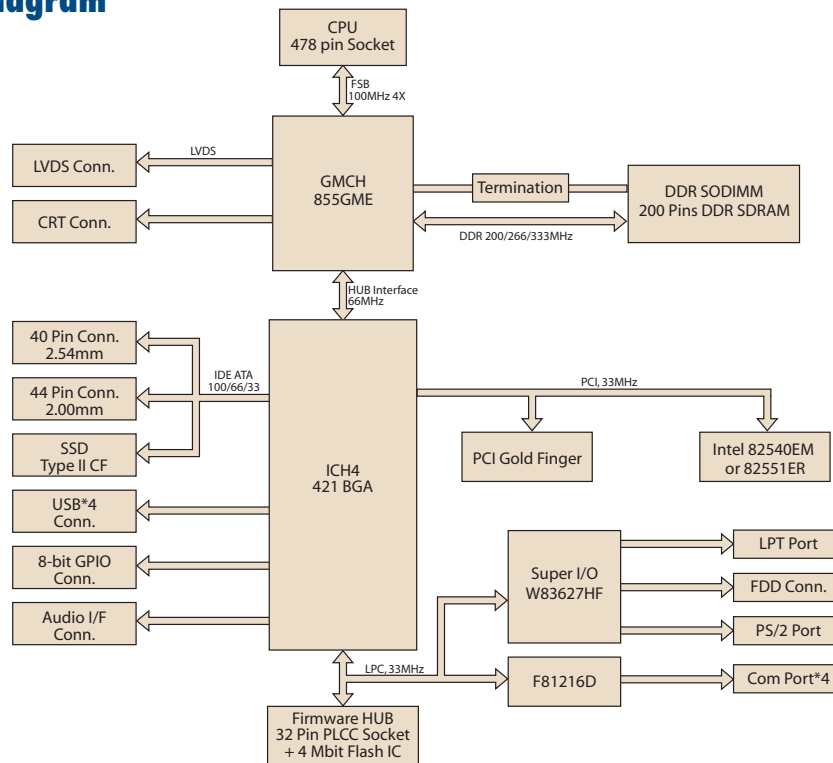

Ordering Information

Part Number	On board CPU	FE LAN
PCI-6881F-00A2E	-	Intel 82551ER
PCI-6881F-M0A2E	Celeron M 600 MHz	Intel 82551ER

Bracket View



PCI-6881F-00A2E
 PCI-6881F-M0A2E

Packing List

Part Number	Description	Quantity
1700060202	Y Cable for PS/2 Keyboard, PS/2 Mouse	x 1
1701400452	E-IDE (HDD) cable	x 1
1701340603	FDD cable (600 mm)	x 1
1700260250	Parallel port cable	x 1
1700000265	Power cable	x 1
1700001276	ATX feature cable	x 1
1750000146	Cooler W/FAN 82 x 44 x 27.5 mm	x 1
9689000002	Jumper pack	x 1
1653302122	Mini jumper	x 1
-	Startup manual	x 1
-	Utility CD	x 1

Accessories

Part Number	Description
IPC-644BP-15ZE	4-slot chassis w/ 150W power supply
IPC-6806SB-15ZBE	6-slot chassis w/ 150W power supply
1703100260	USB cable with 2 ports (2.0mm pitch)
CF-HDD-ADP	CompactFlash 50-pin to IDE 44-pin adapter
PCM-231A-00A1E	Audio module with Line-in, Line-out, Mic
1701140201	COM2 cable (2.0mm pitch)
1700001166	COM3 & 4 cable with bracket (2.0mm pitch)