


# PCI-7030

Intel® ATOM N270, PCI Half-size SBC with Dual GbE LAN/LVDS/DVI/SATA/6 COM

**NEW**

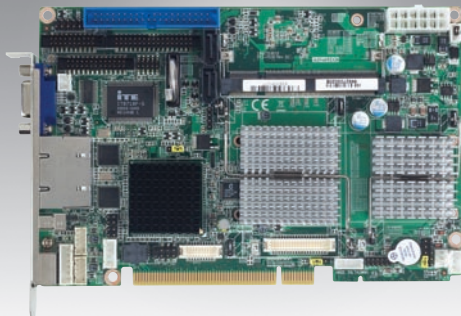

## Features


- Ultra Low power Fanless ATOM N270 1.6 GHz
- One/Dual Gigabit Ethernet
- Supports up to 6 COM, 4 x RS-485 w/Auto-Flow control by PCA-COM485 Module
- 1600 x 1200 @ 24/48 bit LVDS, DVI support



## Specifications

Processor System	CPU	Intel ATOM N270 processor 1.6 GHz			
	FSB	400/533			
	L2 Cache	512 KB cache			
	Chipset	Intel 945GSE + Intel ICH7M			
	BIOS	Award SPI 8 Mb			
Bus	PCI	32-bit/ 33 MHz			
	Technology	Single Channel DDR2 SODIMM 400/533 MHz			
Memory	Max. Capacity	2 GB			
	Socket	Yes			
	Controller	Intel 945GSE integrated			
Graphics	VGA mode	Supports up to QXGA 2048 x 1536 pixels with 32-bit color @ 75 Hz			
	VRAM	Shared system memory up to 224 MB (DVMT 3.0)			
	LVDS	Supports 18/36-bit up to UXGA 1600 x 1200			
	DVI	Maximum pixel clock of 400 MHz up to 2048 x 1536 resolutions @ 75 Hz			
	Dual Display	VGA, LVDS, DVI			
Ethernet	Interface	10/100/1000 Mbps Ethernet			
	Controller	Intel 82574L			
	Connector	RJ-45 x 1 for VG ; RJ-45 x 2 for G2			
EIDE	Mode	Ultra ATA 100/66/33			
	Channel	1			
SATA (150 MB/s)	Port	2 for SATA1, 150 MB/s			
I/O Interface	USB	6 USB2.0 for VG; 5 USB2.0 for G2 480 Mbps; 4 ports onboard and 2 for VG/1 for G2 ports on rear IO			
	Serial	6 COM (2 x RS-232 onboard, 4 x RS-422/485 w/Auto-flow by PCA-COM485 module)			
	Parallel	1 (via super I/O)			
	FDD	1			
	GPIO	8-bit ; CMOS Level (0 ~ 5 V)			
	PS/2	6-pin DIN socket on bracket for PS/2 keyboard and mouse (via super I/O) 6-pin (2.54 mm) wafer box connector for keyboard only			
Watchdog Timer	Output	System reset			
	Interval	1 min or 1 sec, Max 65535 min or 65535 sec			
Miscellaneous	Audio Output	Intel High Definition audio interface (requires an audio extension module P/N: PCA-AUDIO-HDA1E)			
	Solid State Disk	CompactFlash socket (Type I/II), shared with secondary IDE			
Power Requirement	CPU/RAM	ATOM 1.6G + DDR2 2G (533)			
	Max	+12 V (0.31 A)	+5 V (2.19 A)	+3.3 V (0A)	+5 VSB (0.04A) +2 V (0A)
Environment	Temperature	Operating		Non-Operating (Storage)	
		0 ~ 60° C (32 ~ 140° F) (operation humidity: 40° C @ 85% RH Non-Condensing)		-40° C ~ 85° C and 60° C @ 95% RH Non-Condensing	
Physical	Dimensions	185 mm (L) x 122 mm (W) (7.3" x 4.8")			

## Board Diagram

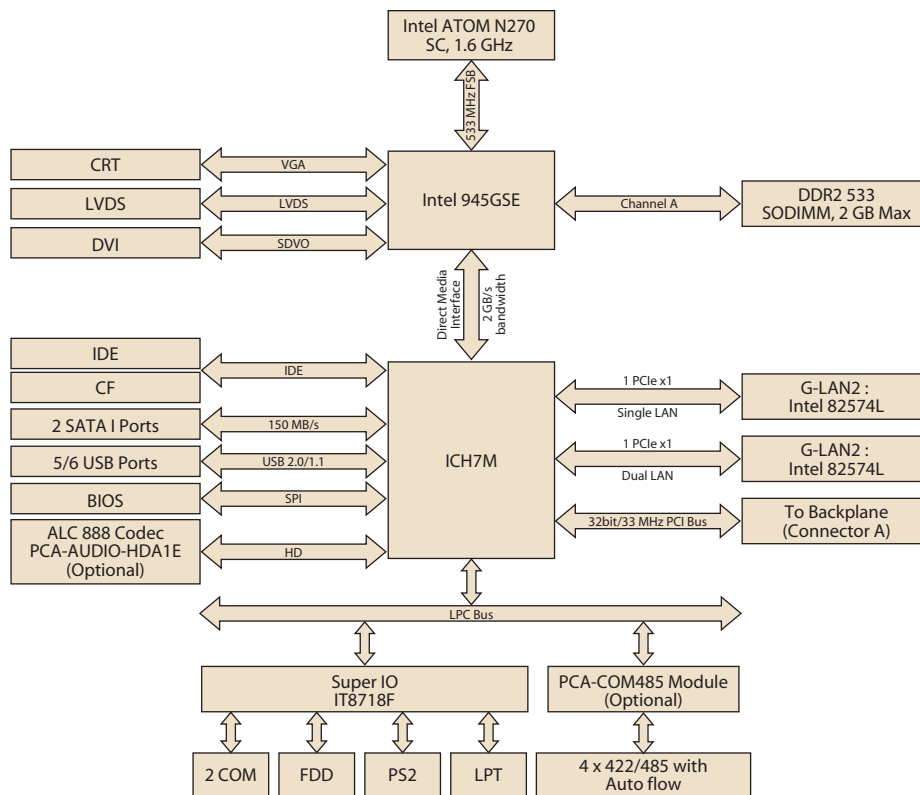

## Ordering Information

P/N	VGA	LVDS	DVI	USB	LAN	COM
PCI-7030VG-00A1E	Yes	Yes	-	6	1 (82574L)	2
PCI-7030G2-00A1E	Yes	Yes	Yes	5	2 (82574L)	2

## Bracket View



PCI-7030G2-00A1E

## Packing List

Part Number	Description	Quantity
1700060202	Y-cable for PS/2 Keyboard, PS/2 Mouse	x 1
1701340603	FDD cable (600 mm)	x 1
1700000265	Power cable	x 1
1700002343	ATX feature cable	x 1
1703150102	Serial ATA HDD power cable	x 1
1700003194	Serial ATA HDD data cable	x 1
1701400452	EIDE (HDD) cable	x 1
1700002223	Parallel port Cable (2.0 mm w/BKT)	x 1
1700008887	USB cable with 4 ports (2.0 mm pitch)	x 1
1700008762	Dual-COM port cable kit for COM1-2	x 1
9689000002	Jumper pack	

## Accessories

Part Number	Description
IPC-644BP-15ZE	4-slot chassis w/150 W power supply
IPC-6806SB-15ZBE	6-slot chassis w/150 W power supply
PCA-AUDIO-HDA1E	HD Audio-card
PCA-SATAP2-00A1E	IDE/SATA Adapter for CPU cards
1701140201	COM Port Cable without bracket
PCA-COM485	4 x 422/485 COM module
PCA-COM232	4 x 232 COM module