

# PPC-L157T

15" Fanless Panel PC with Intel® Atom™ N270 Processor

NEW



## Features

- 15" TFT XGA LCD with optional resistive touchscreen
- Embedded Intel® Atom™ processor N270 1.6 GHz
- System memory up to 2 GB DDR2 SDRAM
- Supports one internal SATA 2.5" HDD
- Supports six USB 2.0 ports (4 external/ 2 internal), Dual Gigabit Ethernet
- Optional PCI/PCIe x 1 expansion kit
- Fanless and ultra-low power consumption
- Optional smart battery module
- Automatic data flow control over RS-485 (COM2)



## Introduction


The PPC-L157T is a 15" Fanless panel PC that delivers high performance while consuming low power. The PPC-L157T operates with low noise and provides display resolutions up to 1024 x 768 (XGA) pixels. The PPC-L157T is equipped with dual Gigabit Ethernet connectors supporting either failover or LAN teaming. Advantech's customization services and optional accessories including wireless modules, battery packs, and SATA optical devices, allow system integrators to design tailor-made solutions to a host of industrial applications.

## Specifications

Processor System	CPU	Intel Atom Processor N270 1.6 GHz	
	CPU Front Side Bus	533 MHz	
	Chipset	Intel 945GSE + Intel ICH7M	
	Secondary Cache	512 KB L2 Cache	
	Memory	200-pin DDR2 533 SODIMM x1 Up to 2 GB	
	Combo Drive	Optional (989KL12801E)	
	SSD	Supports one CompactFlash Type II, socket	
	HDD	One internal SATA interface- 2.5" Type	
	Network (LAN)	2 x 10/100/1000 Mbps (RJ-45)	
	Fully Integrated I/O and Speakers	3 Serial Ports: RS-232 x 2, RS-232/422/485 x 1; 1 GPIO port	
		1 VGA Port ; PS/2 Mouse and Keyboard	
	Bus Expansion	Line-in/ Line-out/ Mic-in	
		Built-in 1W x 2 speakers, USB 2.0 ports x 4	
Front Panel Protection	1 x expansion slot for PCI/PCIe card		
Weight	1 x MINI PCIe slot		
Dimensions (W x H x D)	IP65/ NEMA 4 compliant		
OS Support	6 kg (13.2 lb)		
Power Supply	396.5 x 317.6 x 74.8 (15.6" x 12.5" x 2.95")		
LCD Display	Display Type	Microsoft Windows XPE/XP Pro, Vista	
	Max. Resolution	12 -24 Vdc, 15-24 V <sub>DC</sub> with battery pack	
	Colors	15" Color TFT LCD	
	Pixel Pitch (mm)	1024 x 768	
	Viewing Angle	262 K	
	Luminance (cd/m <sup>2</sup> )	0.297 x 0.297	
	Brightness Control	160°/130°	
	Backlight Lifetime	350	
	Touchscreen (optional)	Type	Yes (by BIOS)
Resolution		50,000 hours	
Light Transmission		Analog Resistive 5 wires (ELO)	
Controller		Continuous	
Durability (Touches)		80 %	
Environmental Specifications	Operating Temperature	USB Interface	
	Relative Humidity	35 million	
	Shock	0-50° C (32-122° F); 0-40° C with battery pack	
	Vibration	10 ~ 95 % @ 40° C, non-condensing	
	EMC	10 G peak acceleration (11ms duration)	
	Safety	1 G	
		CE, FCC Class B, BSMI	
	CE CB, UL, BSMI, CCC , VCCI		

## Dimensions

Unit: mm

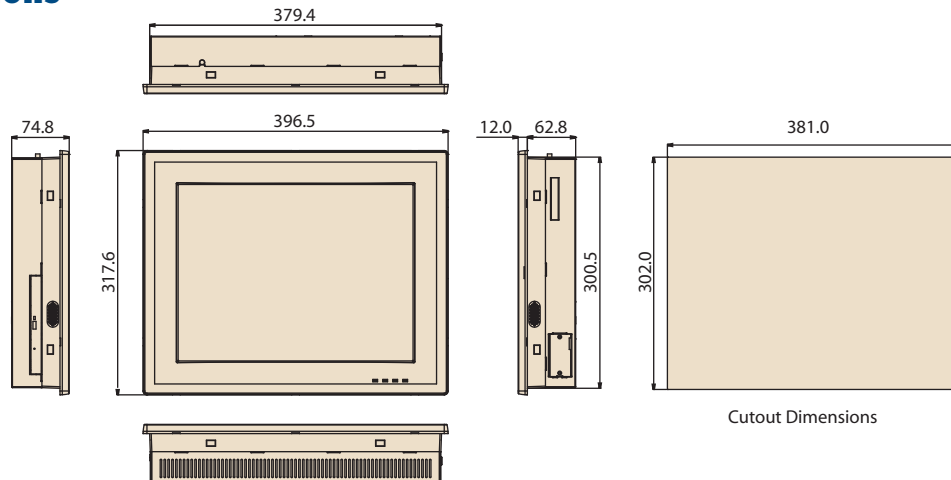


## Ordering Information

Part NO	Description
PPC-L157T-080-XE	Intel Atom processor N270 1.6 GHz fanless panel PC with 15" TFT LCD
PPC-L157T-R80-XE	PPC-L157T-080-XE with resistive touchscreen
PPC-L157T-RXPE0E	PPC-L157T with 1G memory/Windows XPE on 160G HDD
PPC-ARM-A03	VESA Stand ARM for PPC series
PPC-174T WL-MT	Wall mount kit for PPC-174T
PPC-L157-STANDE	Stand desktop stand for PPC-L157T
PPC-L157-EXPE	PCI/PCle expansion kit for PPC-L157
PS-DC19-L157E	19V DC power adapter module for PPC-L128/PPC-L157
1760000837	Smart Li-ion 3S2P 11.1V 4400 mAh -LTC4006/L127
170001524	Power cord 3P UL 10A 125V 1.8M
989KL15700E	Wireless Module for PPC-L157T Series
989KL15701E	Slim type Combo Module for PPC-L157T Series
989KL15702E	Slim type DVD-RW Module for PPC-L157T Series



## Fully-Integrated I/O

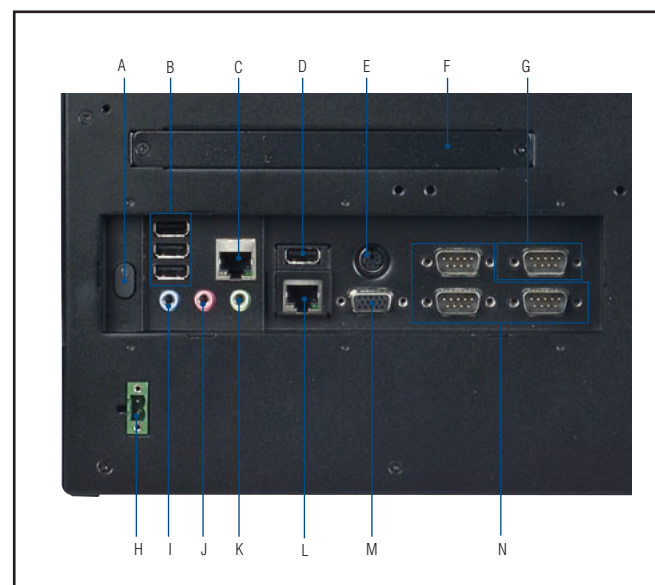

- A. Main power switch
- B. USB 2.0 x 3
- C. Ethernet jack
- D. USB 2.0
- E. PS/2 mouse and keyboard
- F. PCI/PCI-E expansion slot cover
- G. GPIO port
- H. DC inlet
- I. Line-in jack
- J. Line-out jack
- K. Mic-in jack
- L. Ethernet jack
- M. VGA port
- N. Serial ports