



Sparkle Power Inc.
 A Leading Power Supply Manufacturer
 Web site: www.sparklepower.com

ATX-350PA (RoHS Compliant) **350 Watts ATX12V-2.2 Switching Power Supply**

Features

- Complied with ATX12V standard
- High efficiency and reliability, low noise and ripple
- Compatible with European Union Directive 2002/95/EC (Restriction on Hazardous Substances).
- Remote ON/OFF function
- Internal 12V DC fan included
- Noise Killer (thermal fan speed control function)
- Output over voltage, short circuit, and over current protection
- 100% Hi-pot, ATE, and burn-in tested
- Re-settable power shut down
- Complies with FCC part 15 subpart J class B 115Vac operation, and CISPR 22 class B at 230Vac operation
- Approved by UL60950, CSA C22.2 NO. 60950, TUV EN60950 or VDE EN60950, NEMKO EN60950 (CB Report)

Input Characteristics

Input Range: ±10% of 115Vrms/57~63Hz or 230Vrms/47~53Hz,
 Manual Selection

Input Current: 8A (RMS) @115Vac, 4A (RMS) @230Vac

Inrush Current: No Damage

Output Characteristics

Output Voltage	Minimum Load	Normal Load	Maximum Load	Peak Load	Load Reg.	Line Reg.	Ripple & Noise
+3.3V	0.5A	15.9A	22.0A		± 5%	± 1%	50mV P-P
+5V	1.0A	9.5A	21.0A		± 5%	± 1%	50mV P-P
+12V1	1.0A	7.9A	18.0A		± 5%	± 1%	100mV P-P
+12V2	1.0A	11.9A	16.0A	16.5A	± 5%	± 1%	100mV P-P
-12V	0.0A	0.3A	0.3A		± 10%	± 2%	100mV P-P
+5Vsb	0.0A	1.0A	2.5A	3.5A	± 5%	± 1%	50mV P-P

*+3.3V and +5V total output not exceed 130W

*+12V1 and +12V2 total output not exceed 300W, +3.3V & +5V & 12V1& 12V2 total output not exceed 335W

*+12V2 Peak loading, Min Voltage during peak is >11.0Vdc

* Total output for this subject power supply is 350W

Sparkle Power Inc.
Main Office
 1000 Rock Avenue
 San Jose, CA 95131
 TEL: 408-519-8888
 FAX: 408-519-9999
 E-MAIL: info@sparklepower.com


Sparkle Power Inc.
Los Angeles Office
 17071 Green Drive
 City of Industry, CA 91745
 TEL: 626-839-7180
 FAX: 626-839-3395



Specification




- **Temperature Range:** Operating: 0°C ~ +50°C, Full load at 25°C, De-rate 2W/°C from 25°C to 50°C;
- **Storage & shipping:** -20°C ~ +65°C
- **Humidity:** 5 ~ 95% on operating and storage
- **Dielectric Withstand:** Primary frame ground 1800V AC for 1 second
- **Efficiency:** 70% minimum measured at normal AC mains voltage and frequency with full load
- **Rise time:** Less than 20ms
- **Hold-up Time:** 16ms minimum at nominal input voltage
- **Power Good Signal:** Power on delay time 100 ~ 500ms, off delay 1ms minimum (TTL and CMOS compatible)
- **Leakage Current:** Less than 3.5mA
- **MTBF:** 100,000 hours on maximum load at +25°C
- **Dimensions (LxWxH):** 140x150x86mm/5.5x5.9x3.4inch

REV. ID.	NO.	SIGNAL	WIRE COLOR	GUAGE	CONDUCTOR TYPE	CABLE LENGTH
P1 /24	1	+3.3VDC	ORANGE	18	AMP	340+30mm
	2	+3.3VDC	ORANGE	18	AMP	340+30mm
	3	COM	BLACK	18	AMP	-10
	4	+5VDC	RED	18	AMP	340+30mm
	5	COM	BLACK	18	AMP	-10
	6	+5VDC	RED	18	AMP	340+30mm
	7	COM	BLACK	18	AMP	-10
	8	+5VDC	RED	18	AMP	340+30mm
	9	COM	BLACK	18	AMP	-10
	10	+5VDC	RED	18	AMP	340+30mm
	11	+12V	YELLOW	18	AMP	340+30mm
	12	+3.3VDC	ORANGE	18	AMP	340+30mm
	13	+3.3VDC	ORANGE	20	AMP	340+30mm
	14	5VDC	BROWN	24	AMP	340+30mm
	15	12VDC	BLUE	24	AMP	340+30mm
	16	PS-ON	GREEN	24	AMP	340+30mm
	17	COM	BLACK	18	AMP	-10
	18	COM	BLACK	18	AMP	-10
	19	COM	BLACK	18	AMP	-10
	20	COM	BLACK	18	AMP	-10
	21	+5VDC	RED	18	AMP	340+30mm
	22	+5VDC	RED	18	AMP	340+30mm
	23	+5VDC	RED	18	AMP	340+30mm
	24	COM	BLACK	18	AMP	-10
PA	1	+12V	YELLOW	18	AMP	380+30mm
	2	COM	BLACK	18	AMP	-10
	3	COM	BLACK	18	AMP	-10
	4	+12V	YELLOW	18	AMP	380+30mm
PB	1	+12V	YELLOW	18	AMP	155+10mm
	2	COM	BLACK	18	AMP	-10
	3	COM	BLACK	18	AMP	-10
	4	+5V	RED	18	AMP	155+10mm
PC	1	+12V	YELLOW	22	AMP	178±2-4
	2	COM	BLACK	22	AMP	155±10mm
	3	COM	BLACK	22	AMP	155±10mm
	4	+5V	RED	22	AMP	178±2-4
PD	1	+12V	YELLOW	18	AMP	380+30mm
	2	COM	BLACK	18	AMP	-10
	3	COM	BLACK	18	AMP	-10
	4	+5V	RED	18	AMP	380+30mm
PE	1	+12V	YELLOW	18	AMP	155±10mm
	2	COM	BLACK	18	AMP	-10
	3	COM	BLACK	18	AMP	-10
	4	+5V	RED	18	AMP	155±10mm
PF	1	COM	BLACK	18	MOLEX	340+30mm
	2	COM	BLACK	18	MOLEX	340+30mm
	3	+12V	YELLOW	18	MOLEX	340+30mm
	4	+12V	YELLOW	18	MOLEX	340+30mm
PG	1	COM	BLACK	18	MOLEX	150±10mm
	2	COM	BLACK	18	MOLEX	150±10mm
	3	+5V	RED	18	MOLEX	150±10mm
	4	COM	BLACK	18	MOLEX	150±10mm
PH	1	+12V	YELLOW	18	MOLEX	1400+30mm
	2	COM	BLACK	18	MOLEX	1400+30mm
	3	COM	BLACK	18	MOLEX	1400+30mm
	4	COM	BLACK	18	MOLEX	1400+30mm
	5	+3.3VDC	ORANGE	18	MOLEX	1400+30mm


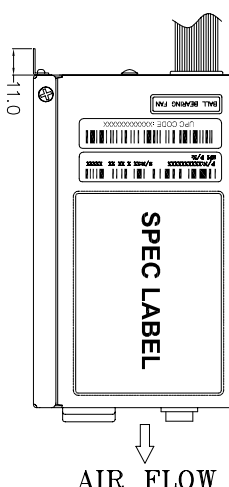


NOTE:
 1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤作業務指示加貼:

UNIT:mm

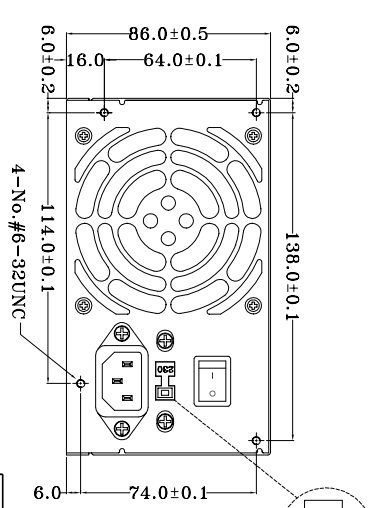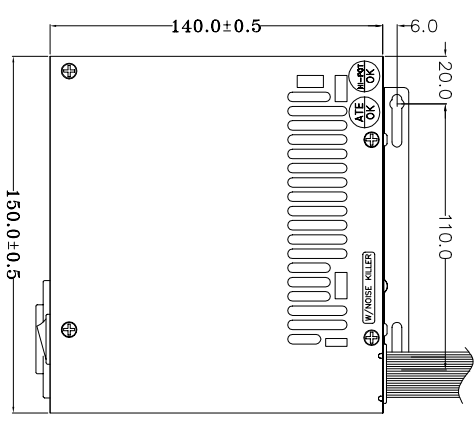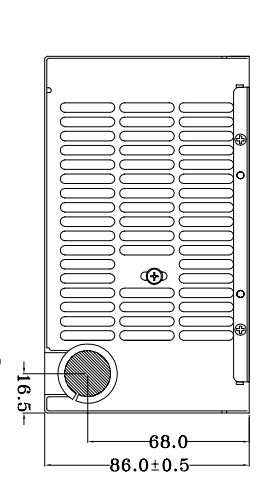

3 客户要求變更整組線材

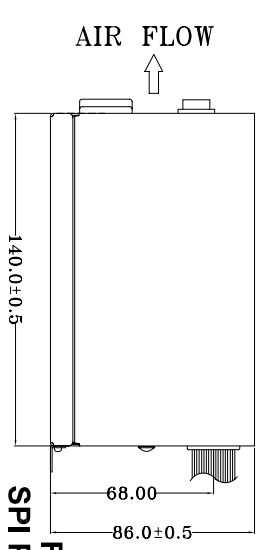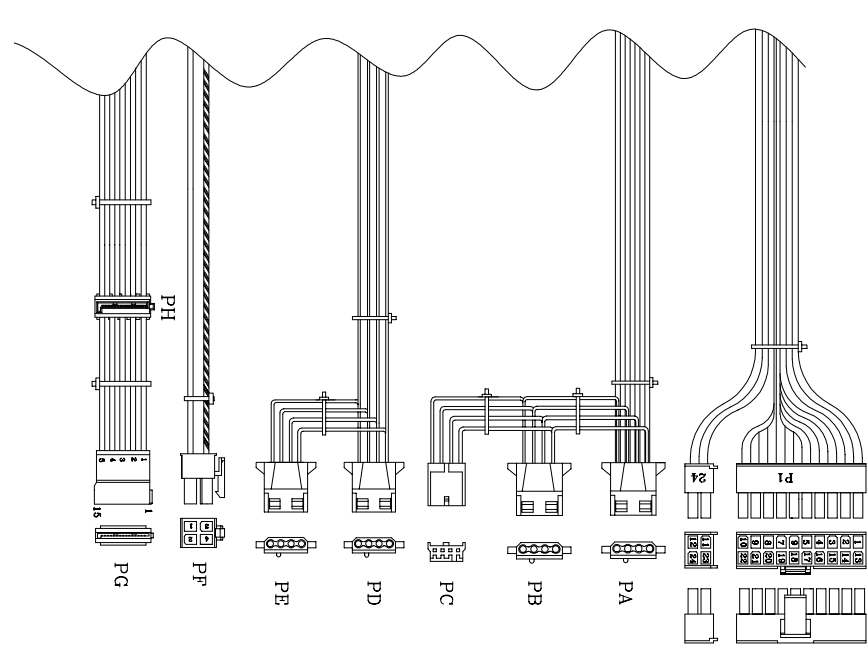

FSP P/N: 9PX3504805
 SPI P/N: ATX-350PA-B204

MODEL NO.: ATX-350PA(S03001)	TITLE: ASSY	SHEET: 1 OF 1	REV: 03
R&D(1)	PE	DRAWN	DATE
			DEC.19.2006

表單編號: 700P-0111