

DOCSIS/EuroDOCSIS 1.1 ADVANCED CABLE MODEM TERMINATION SYSTEM


BCM93212 FEATURES


- The BCM93212 is a DOCSIS/EuroDOCSIS-1.0 and 1.1 based cable modem termination system (CMTS) reference design which incorporates:
 - 64/256/512/1024 QAM downstream modulation with FEC
 - QPSK, 16, 32 and 64 QAM burst TDMA demodulation
 - Digitally generated IF carrier that meets DOCSIS/EuroDOCSIS-1.1 and 1.1 spectral purity requirements without a SAW filter
 - DOCSIS/EuroDOCSIS programmable downstream transmit IF carrier center frequency and channel bandwidth
 - Master/Slave MAP, reference clock, timestamp synchronization, and 10/100/1000BASE-T front panel connectors
 - BCM3212 MAC hardware that simplifies registration, ranging, fragmentation, concatenation, encryption, and payload header suppression
 - Scheduler support for DOCSIS 1.1 best effort, polled, and unsolicited grant service flows
- The BCM93212 basic system parameters include:
 - A BCM3212 Compact PCI V2.1 compliant base board with plug in connectors for 64/256/512/1024 QAM modulator and TDMA demodulator daughter cards
 - Support for one QAM downstream channel
 - Support for six programmable upstream channels that support all DOCSIS 1.0 / 1.1 and TDMA symbol rates and demodulation types.
 - 10/100/1000BASE-T network side interface
 - Seamless upgrade for legacy BCM93210 CMTS platforms using QNX RTOS

SUMMARY OF BENEFITS

- Provides complimentary system to the BCM93345, BCM93350 and BCM93360 subscriber cable modem and residential gateway reference design for product development and testing.
- Supports DOCSIS/EuroDOCSIS 1.1 fragmentation and concatenation for Quality of Service (QoS).
- Provides a highly integrated 6 x 1 CMTS reference design in a compact PCI form factor.
- Accelerates software development by providing source code for core software functionality and low level diagnostics.
 - Reduces customers' internal development expenses.
 - Leverages years of development work embodied in the Broadcom BCM93210 reference design.
- Based on Broadcom's field-proven QAMLink technology.
- Reference design comes complete with:
 - Schematics and Gerber files
 - Bill of Materials (BOM)
 - Data sheets
 - Software source code and API

BCM93212 Cable Modem Termination System (CMTS) Reference Design

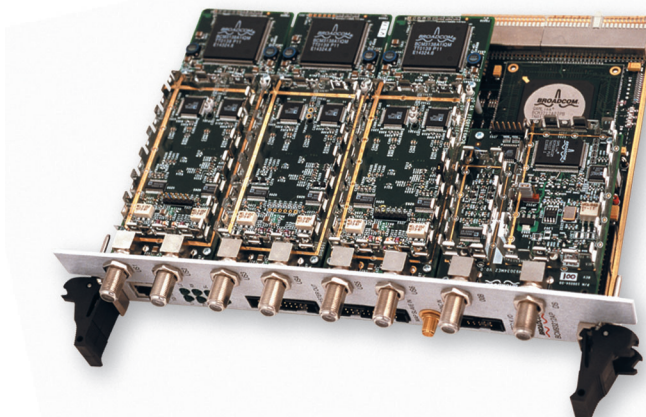

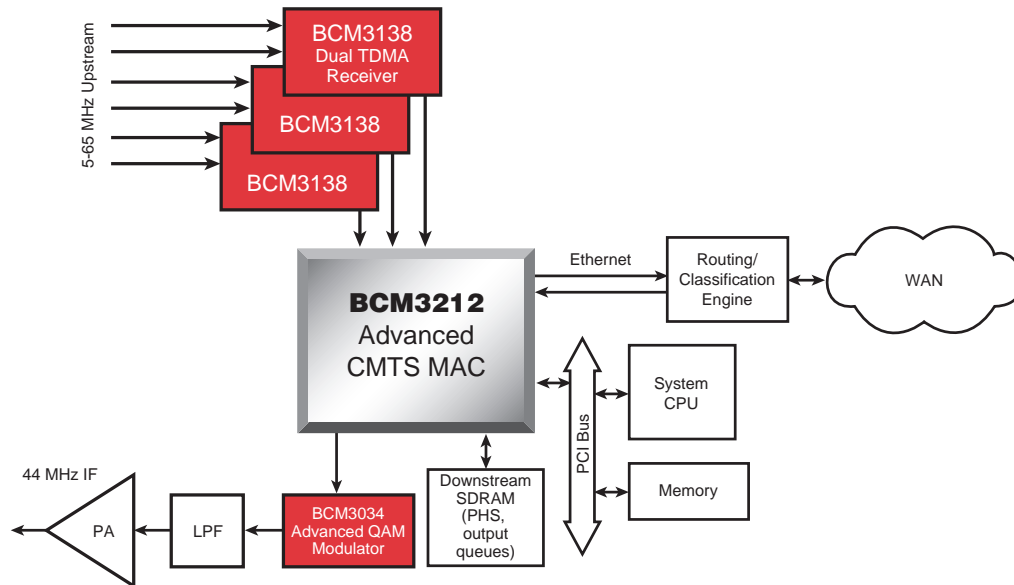

The Broadcom **BCM93212** QAMLink® DOCSIS/EuroDOCSIS Cable Modem Termination System (CMTS) Reference Design represents the industry's first complete DOCSIS/EuroDOCSIS-based silicon solution with TDMA upstream and advanced PHY downstream functions for the headend cable plant. The **BCM93212** CMTS supports the DOCSIS/EuroDOCSIS 1.0 and 1.1 specification enabling QoS for the simultaneous processing of voice, video and data on a prioritized basis. The **BCM93212** CMTS includes the BCM3034 Universal Advanced PHY QAMLink® Modulator, the BCM3212 DOCSIS/EuroDOCSIS 1.1 CMTS MAC and the BCM3138 Universal TDMA Burst Demodulator and provides all the necessary functionality required to receive and transmit high rate digital data to and from a cable plant.

Functions include:

- Hardware-supported messaging (ranging, registration, channel configuration)
- Physical layer configurations (upstream baud rates, upstream channel descriptor and MAP variations, and FEC code-word size)
- Baseline privacy support
- Flexible PHY and MAC parameter settings and performance monitoring

Broadcom®, the pulse logo, and Connecting everything® are trademarks of Broadcom Corporation and/or its subsidiaries in the United States and certain other countries. All other trademarks are the property of their respective owners.

Connecting
everything®

BROADCOM CORPORATION

16215 Alton Parkway, P.O. Box 57013
Irvine, California 92619-7013

© 2002 by BROADCOM CORPORATION. All rights reserved.

93212-PB02-R 11.22.02

The **BCM93212** is complemented at the subscriber end by the BCM93345, BCM93350 and the BCM93360, DOCSIS/EuroDOCSIS-based cable modem and residential gateway silicon solutions. The BCM93360 is based on the BCM3360 single-chip residential gateway, which integrates all the major functions of a cable modem into a single device. Together, the **BCM93212** and the BCM93360 provide vendors with a seamless end-to-end silicon solution for development and testing of an DOCSIS/EuroDOCSIS-based cable modem and cable modem termination system with TDMA upstream and advanced PHY downstream functions.

Ordering Information:

BCM93212 CL-DOCSIS CMTS

BCM93212-E CL-EuroDOCSIS CMTS



Phone: 949-450-8700

FAX: 949-450-8710

Email: info@broadcom.com

Web: www.broadcom.com