



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
CSA	CSB	GND	VCC	VO	D/I	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:

- | | |
|----------------------------------|-----------------------------|
| 1. DISPLAY TYPE: | STN/YELLOW GREEN |
| 2. VIEWING DIRECTION: | 6: 00 |
| 3. POLARIZER MODE: | TRANSFLECTIVE/POSITIVE |
| 4. DRIVE METHOD: | 1/64 DUTY 1/9 BIAS |
| 5. OPERATING TEMP: | 0°C~+50°C |
| 6. STORAGE TEMP: | -20°C~+60°C |
| 7. CONTROLLER: | S6B0108A01-COCX(KS0108BPCC) |
| 8. BACKLIGHT TYPE: | LED |
| 9. LCD OPERATING VOLTAGE: | 12.6V |
| 10. BEZEL IS TO BE PAINTED BLACK | |
| 11. UNMARKED TOLERANCES: | ±0.3mm |

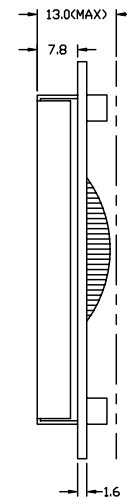

DETAIL: A



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM12864FBC6	
CHECKED BY:	DWG NO: G-2	
APPROVED BY:	DWG NAME: TM12864FBC6G-2	SCALE:
CONFIRMED BY:	SHEET NO: 01	UNIT: mm