




ELECTRICAL SPECIFICATIONS

INPUT

- *Input range-----90~264 VAC, universal
- *Frequency-----47~63Hz
- *Inrush current-----38A typical, Cold start @25°C, 115VAC
- *Efficiency-----65%~85% typical at full load
- *EMI filter-----FCC Class B conducted, CISPR 22
Class B conducted, EN55022 class B
Conducted
- *Line regulation---- +/- 0.5% typical

OUTPUT

- *Maximum power---90W convection (Refer next page)
- *Hold-up time -----10ms typical at full load and 115 VAC nominal line
- *Overload protection-Short circuit protection
- *Overvoltage protection -----Main output 20% to 40% above nominal output
- *Ripple/Noise ----- +/- 1% Max. @full load
(Optional +/-0.5 % per inquiry)

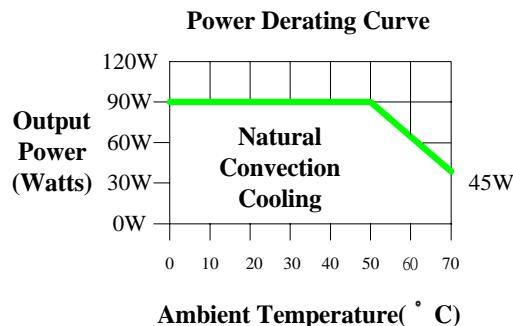

KEY FEATURES

- *Universal input
- *Built-in EMI filter
- *Optional remote sense on main output
- *Optional constant current charger
- *Optional ±12VDC/±24VDC/±48VDC input
- *Optional cover
- *Optional constant current change (for single output)

APPLICATIONS

- *Telecommunications/Business machines
- *Computer peripherals/Medical instruments
- *Test & industrial equipments

EMI & EMC

- *FCC part 15, Class B
- *CISPR 22 / EN55022, Class B
- *VCCI ,Class 2
- *CE, EN61000-3-2 (Class A) and -3 ; EN61000-4-2,
-3 , -4 , -5 , -6 and -11

SAFETY APPROVAL

- *UL1950 / c UL
- *Optional CSA 22.2, LEVEL 3 (COMPLY WITH)
- *TUV EN60950
- *Optional UL 2601(EMI Class A)(COMPLY WITH)

ENVIRONMENTAL

- *Operating temperature :
0 to 50°C ambient; derate each output at 2.5% per degree from 50°C to 70°C
- *Humidity:
Operating; non-condensing, 5% to 95%
- *Vibration :
10~55 Hz at 1G 3 minutes period, 30 minutes along X, Y and Z axis
- *Storage temperature:
-40 to 85°C
- *Temperature coefficient:
+/- 0.05% per degree C
- *MTBF demonstrated:
>100,000 hours at full load and 25°C ambient conditions

TPS100 SWITCHING MODE 90W U CHANNEL POWER SUPPLIES

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUT CURRENT	PEAK OUTPUT CURRENT(NOTE1)	MINIMUM OUTPUT CURRENT	TOTAL REGULATION(NOTE3)	RIPPLE & NOISE %P-P(NOTE2)	PEAK OUTPUT POWER(NOTE1)
SINGLE OUTPUT MODEL SELECTION CHART								
TPS100-10	+5V	±10% Typical	18A	29.7A	0A	±3%	±1%	150W Typical
TPS100-11	+12V	±10% Typical	7.5A	12.4A	0A	±3%	±1%	150W Typical
TPS100-12	+15V	±10% Typical	6A	9.9A	0A	±3%	±1%	150W Typical
TPS100-13	+24V	±10% Typical	3.75A	6.2A	0A	±3%	±1%	150W Typical
TPS100-14	+48V	±10% Typical	1.875A	3.1A	0A	±3%	±1%	150W Typical
TPS100-15	+13.5V	±10% Typical	6.66A	10.9A	0A	±3%	±1%	150W Typical
TPS100-16	+56V	±10% Typical	1.6A	2.6A	0A	±3%	±1%	150W Typical
TPS100-17	+18V	±10% Typical	5A	2.6A	0A	±3%	±1%	150W Typical
TPS100-18	+3.3V	±10% Typical	25A	41.3A	0A	±5%	±1.5%	150W Typical
DUAL OUTPUT MODEL SELECTION CHART								
TPS100-20	+5 V	±10% Typical	10A	16.5A	1A	±5%	±1%	150W Typical
	+12V	Fixed	4.2A	6.9A	0.42A	±5%	±1%	
TPS100-21	+5 V	±10% Typical	10A	16.5A	1A	±5%	±1%	150W Typical
	+24V	Fixed	2.2A	3.6A	0.22A	±5%	±1%	
TPS100-22	+5 V	±10% Typical	10A	16.5A	1A	±5%	±1%	150W Typical
	-5 V	Fixed	10A	16.5A	1A	±5%	±1%	
TPS100-23	+12V	±10% Typical	4.2A	6.9A	0.42A	±5%	±1%	150W Typical
	-12 V	Fixed	4.2A	6.9A	0.42A	±5%	±1%	
TPS100-24	+15 V	±10% Typical	3.4A	5.6A	0.34A	±5%	±1%	150W Typical
	-15 V	Fixed	3.4A	5.6A	0.34A	±5%	±1%	
TPS100-25	+3.3V	±10% Typical	17A	28A	1.7A	±5%	±1.5%	150W Typical
	+12 V	Fixed	1A	1.6A	0.1A	±5%	±1%	
TPS100-26	+5 V	±10% Typical	1A	1.6A	0.1A	±5%	±1%	150W Typical
	+48V	Fixed	2A	3.3A	0.2A	±5%	±1%	
TRIPLE OUTPUT MODEL SELECTION CHART								
TPS100-30	+5V	±10% Typical	10A	16.5A	1A	±5%	±1%	
	+12V	Fixed	4A	6.6A	0.4A	±5%	±1%	150W Typical
	-5 V	Fixed	0.6A	1A	0.06A	±10%	±1%	
TPS100-31	+5V	±10% Typical	10A	16.5A	1A	±5%	±1%	
	+12V	Fixed	4A	6.6A	0.4A	±5%	±1%	150W Typical
	-12V	Fixed	0.6A	1A	0.06A	±10%	±1%	
TPS100-32	+5V	±10% Typical	10A	16.5A	1A	±5%	±1%	
	+15V	Fixed	2.8A	4.6A	0.28A	±5%	±1%	150W Typical
	-15V	Fixed	0.6A	1A	0.06A	±10%	±1%	
TPS100-33	+5V	±10% Typical	14A	23.1A	1.4A	±5%	±1%	
	+15V	Fixed	2A	3.3A	0.2A	±5%	±1%	150W Typical
	-5 V	Fixed	0.5A	0.8A	0.05A	±10%	±1%	
TPS100-34	+5V	±10% Typical	13A	21.5A	1.3A	±5%	±1%	
	+15V	Fixed	2A	3.3A	0.2A	±5%	±1%	150W Typical
	-12V	Fixed	0.6A	1A	0.06A	±10%	±1%	
TPS100-35	+5 V	±10% Typical	9A	14.9A	0.9A	±5%	±1%	
	+24V	Fixed	2A	3.3A	0.2A	±5%	±1%	150W Typical
	-12V	Fixed	0.6A	1A	0.06A	±10%	±1%	
TPS100-36	+5V	±10% Typical	9A	14.9A	0.9A	±5%	±1%	
	+12V	Fixed	3.5A	5.8A	0.35A	±5%	±1%	150W Typical
	-12V	Fixed	0.6A	1A	0.06A	±10%	±1%	
TPS100-37	+5V	±10% Typical	9A	14.9A	0.9A	±5%	±1%	
	+12V	Fixed	3.5A	5.8A	0.35A	±5%	±1%	150W Typical
	+24V	Fixed	0.6A	1A	0.06A	±10%	±1%	
TPS100-38	+5V	±10% Typical	6A	9.9A	0.6A	±5%	±1%	
	+12V	Fixed	2A	3.3A	0.2A	±5%	±1%	150W Typical
	+48V	Fixed	1A	1.6A	0.1A	±10%	±1%	

TOTAL POWER INT'L. TEL:877-646-0900 FAX:978-453-7395

E-mail:sales@total-power.com <http://www.total-power.com>

TPS100 SWITCHING MODE 90W U CHANNEL POWER SUPPLIES

MODEL	OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAXIMUM OUTPUT CURRENT	PEAK OUTPUT CURRENT(NOTE1)	MINIMUM OUTPUT CURRENT	TOTAL REGULATION(NOTE3)	RIPPLE & NOISE %P-P(NOTE2)	PEAK OUTPUT POWER(NOTE1)
QUAD OUTPUT MODEL SELECTION CHART								
TPS100-40	+ 5V	±10% Typical	10A	16.5A	1A	±5%	±1%	
	+12V	Fixed	3.5A	5.8A	0.35A	±5%	±1%	
	- 12V	Fixed	0.5A	0.8A	0.05A	±10%	±1%	
	- 5 V	Fixed	0.5A	0.8A	0.05A	±10%	±1%	
TPS100-41	+ 5V	±10% Typical	10A	16.5A	1A	±5%	±1%	
	+12V	Fixed	3A	5A	0.3A	±5%	±1%	
	- 12V	Fixed	1A	1.6A	0.1A	±10%	±1%	
	- 5 V	Fixed	1A	1.6A	0.1A	±10%	±1%	
TPS100-42	+ 5V	±10% Typical	10A	16.5A	1A	±5%	±1%	
	+12V	Fixed	2A	3.3A	0.2A	±5%	±1%	
	- 15V	Fixed	1A	1.6A	0.1A	±10%	±1%	
	+15V	Fixed	1A	1.6A	0.1A	±10%	±1%	
TPS100-43	+ 5V	±10% Typical	6A	9.9A	0.6A	±5%	±1%	
	+12V	Fixed	2.5A	4.1A	0.25A	±5%	±1%	
	-15V	Fixed	1A	1.6A	0.1A	±10%	±1%	
	- 12V	Fixed	1A	1.6A	0.1A	±10%	±1%	
TPS100-44	+ 5V	±10% Typical	6A	9.9A	0.6A	±5%	±1%	
	+12V	Fixed	1A	1.6A	0.1A	±5%	±1%	
	- 12V	Fixed	1A	1.6A	0.1A	±10%	±1%	
	+48V	Fixed	1A	1.6A	0.1A	±10%	±1%	
TPS100-45	+ 5V	±10% Typical	6A	9.9A	0.6A	±5%	±1%	
	+12V	Fixed	2A	3.3A	0.2A	±5%	±1%	
	- 12V	Fixed	1A	1.6A	0.1A	±10%	±1%	
	+24V	Fixed	1.5A	2.5A	0.15A	±10%	±1%	
TPS100-46	+ 5V	±10% Typical	2.5A	4.1A	0.25A	±5%	±1%	
	+12V	Fixed	1A	1.6A	0.1A	±5%	±1%	
	- 12V	Fixed	2A	3.3A	0.2A	±10%	±1%	
	+36V	Fixed	1.5A	2.5A	0.15A	±10%	±1%	

NOTES: 1) Peak loads for lasting <30 seconds with a maximum 10% duty cycle are acceptable. Please contact us if need special peak load.

2) Maximum peak to peak noise expressed as a percentage of output voltage, 20MHz bandwidth, 0.1 μ F and 47 μ F Cap. on outputs.

3) Loading test conditions are set for all outputs at minimum, middle and maximum of loads. Special cross loading requirement is welcomed.

4) Detailed engineering specification of each model is available for inquiry.

5) Special output voltage/current inquiry is welcomed.



6) Specifications subject to change without notice.

7) 25% derated if 24 VDC input version; 50% derated if 12 VDC input version; 25% derated if additional cover.

DPS100

CON1=CONNECTOR,MOLEX#09-65-2058(OR EQUIVALENT)
 (MATING CONECT.=MOLEX#09-50-3051)
 CON2=CONNECTOR,MOLEX#09-65-2148(OR EQUIVALENT)
 (MATING CONECT.=MOLEX#09-50-3141)
 ALL MATING TERMINAL=MOLEX#08-50-0106(OR EQUIVALENT)

CON3=CONNECTOR,MOLEX#22-27-2041(OR EQUIVALENT)
 (MATING CONECT.=MOLEX#22-01-3047)
 MATING TERMINAL=MOLEX#08-50-0113(OR EQUIVALENT)

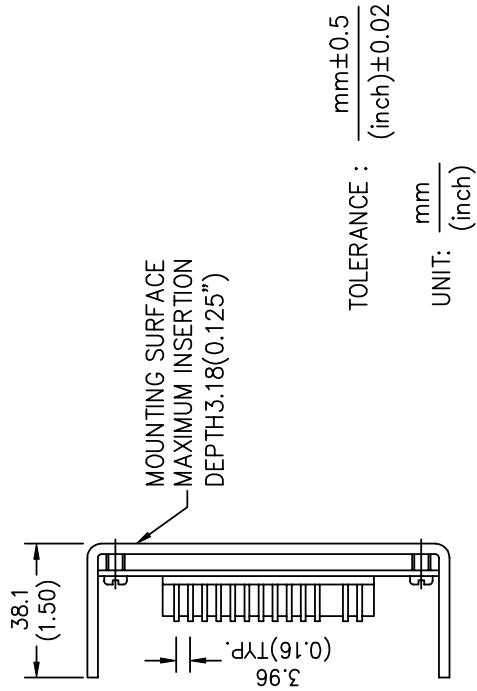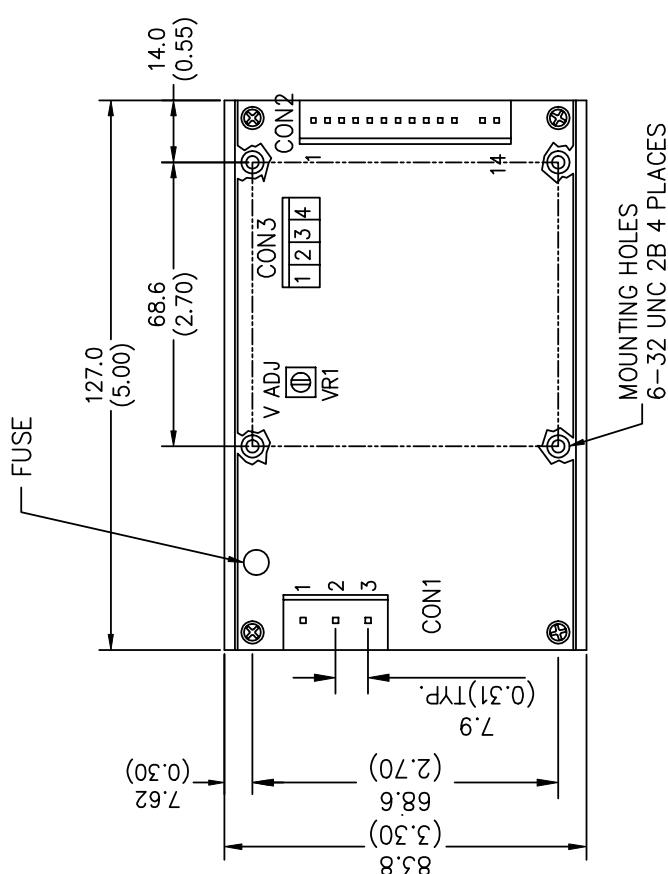

TOLERANCE : $\frac{\text{mm} \pm 0.5}{(\text{inch}) \pm 0.02}$
 UNIT: $\frac{\text{mm}}{(\text{inch})}$

CON3 CONFIGURATION

1	2	3	4
S-	S+	RET	PG

CON2 (CONNECTORS) CONFIGURATION FOR V4 ISOLATED

Multiple	1-3	4-7	8-10	11	12	13	14
Output	V1	RET	V2	N/A	V3	KEY	V4RET

CON2 (CONNECTORS) CONFIGURATION FOR V4 POSITIVE

Multiple	1-3	4-7	8-10	11	12	13	14
Output	V1	RET	V2	N/A	V3	KEY	V4(+)

CON2 (CONNECTORS) CONFIGURATION FOR V4 NEGATIVE

Multiple	1-3	4-7	8-10	11	12	13	14
Output	V1	RET	V2	N/A	V3	KEY	V4(-)RET

CON2 (CONNECTORS) CONFIGURATION FOR V2 ISOLATED

Dual	1-3	4-7	8-9	10-14
Output	V1	RET	V2	NC

CON2 (CONNECTORS) CONFIGURATION FOR V2 (+)

Single	1-5	6-10	11-14
Output	V1(+)	RET(-)	NC