

WIDE BAND DPDT SWITCH

DESCRIPTION

The μPD5738T6N is a CMOS MMIC DPDT (Double Pole Double Throw) switch which is developed for mobile communications, wireless communications and another RF switching applications.

This device can operate within frequency from 0.01 to 2.5 GHz, having low insertion loss and high isolation performances. This device is housed in a 6-pin plastic TSON (Thin Small Out-line Non-leaded) (T6N) package, which allows high-density surface mounting.

FEATURES

- Supply voltage : $V_{DD} = 1.5$ to 3.6 V (2.8 V TYP.)
- Switch control voltage : $V_{cont(H)} = 1.5$ to 3.6 V (2.8 V TYP.)
 : $V_{cont(L)} = -0.2$ to $+0.4$ V (0 V TYP.)
- Low insertion loss^{Note} : $L_{ins1} = 0.5$ dB TYP. @ $f = 0.01$ to 0.05 GHz
 : $L_{ins2} = 0.8$ dB TYP. @ $f = 0.05$ to 1.0 GHz
 : $L_{ins3} = 1.4$ dB TYP. @ $f = 1.0$ to 2.0 GHz
 : $L_{ins4} = 1.6$ dB TYP. @ $f = 2.0$ to 2.5 GHz
- High isolation^{Note} : $ISL1 = 45$ dB TYP. @ $f = 0.01$ to 0.05 GHz
 : $ISL2 = 22$ dB TYP. @ $f = 0.05$ to 1.0 GHz
 : $ISL3 = 16$ dB TYP. @ $f = 1.0$ to 2.0 GHz
 : $ISL4 = 15$ dB TYP. @ $f = 2.0$ to 2.5 GHz
- Handling power^{Note} : $P_{in(1\text{ dB})} = +20$ dBm TYP. @ $f = 1.0$ GHz
 : $P_{in(0.1\text{ dB})} = +15$ dBm TYP. @ $f = 1.0$ GHz
- High-density surface mounting : 6-pin plastic TSON (T6N) package ($1.5 \times 1.5 \times 0.37$ mm)
- High ESD voltage : machine-model 200 V (TYP.), human-body-model 3 kV (TYP.)

Note $T_A = 25^\circ\text{C}$, $V_{DD} = 2.8$ V, $V_{cont(H)} = 2.8$ V, $V_{cont(L)} = 0$ V

APPLICATIONS

- Mobile communications
- Wireless communications
- Another RF switching applications

ORDERING INFORMATION


Part Number	Order Number	Package	Marking	Supplying Form
μPD5738T6N-E2	μPD5738T6N-E2-A	6-pin plastic TSON (T6N) (Pb-Free)	C3X	<ul style="list-style-type: none"> • Embossed tape 8 mm wide • Pin 1, 6 face the perforation side of the tape • Qty 3 kpcs/reel

Remark To order evaluation samples, please contact your nearby sales office.
 Part number for sample order: μPD5738T6N

Caution Observe precautions when handling because these devices are sensitive to electrostatic discharge.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
 Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.

PIN CONNECTIONS AND INTERNAL BLOCK DIAGRAM

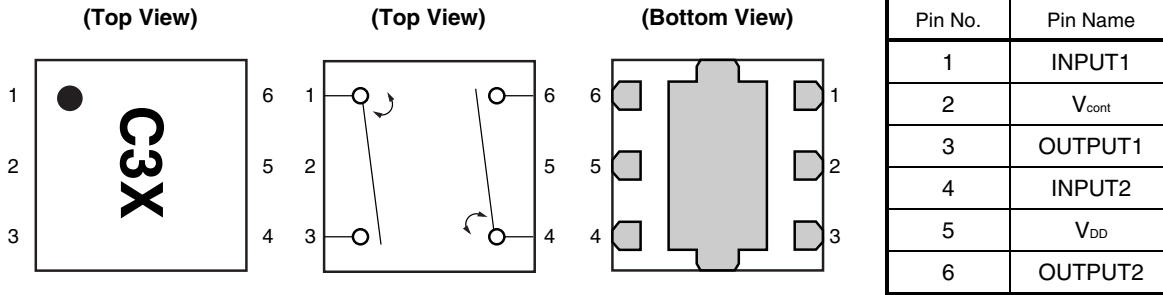

Remark Exposed pad : GND

TRUTH TABLE

V _{cont}	INPUT1-OUTPUT1, INPUT2-OUTPUT2	INPUT1-OUTPUT2, INPUT2-OUTPUT1
Low	ON	OFF
High	OFF	ON

Remark High: +2.8 V, Low: 0 V

ABSOLUTE MAXIMUM RATINGS (T_A = +25°C, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Supply Voltage	V _{DD}	-0.5 to +4.6	V
Switch Control Voltage	V _{cont}	-0.5 to +4.6	V
Voltage Difference	V _{cont (H)} - V _{DD}	+0.5	V
Input Power	P _{in}	+23	dBm
Operating Ambient Temperature	T _A	-45 to +85	°C
Storage Temperature	T _{stg}	-55 to +150	°C

RECOMMENDED OPERATING RANGE (T_A = +25°C, unless otherwise specified)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage	V _{DD}	+1.5	+2.8	+3.6	V
Switch Control Voltage (H)	V _{cont (H)}	+1.5	+2.8	+3.6	V
Switch Control Voltage (L)	V _{cont (L)}	-0.2	0	+0.4	V

Remark V_{DD} - 0.4 V ≤ V_{cont (H)} ≤ V_{DD} + 0.2 V

ELECTRICAL CHARACTERISTICS

(T_A = +25°C, V_{DD} = 2.8 V, V_{cont (H)} = 2.8 V, V_{cont (L)} = 0 V, P_{in} = 0 dBm, Z₀ = 50 Ω, DC blocking capacitors = 10 000 pF, unless otherwise specified)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Insertion Loss 1	L _{ins1}	f = 0.01 to 0.05 GHz	–	0.5	0.9	dB
Insertion Loss 2	L _{ins2}	f = 0.05 to 1.0 GHz	–	0.8	1.2	dB
Insertion Loss 3	L _{ins3}	f = 1.0 to 2.0 GHz	–	1.4	1.8	dB
Insertion Loss 4	L _{ins4}	f = 2.0 to 2.5 GHz	–	1.6	2.0	dB
Isolation 1	ISL1	f = 0.01 to 0.05 GHz	35	45	–	dB
Isolation 2	ISL2	f = 0.05 to 1.0 GHz	18	22	–	dB
Isolation 3	ISL3	f = 1.0 to 2.0 GHz	13	16	–	dB
Isolation 4	ISL4	f = 2.0 to 2.5 GHz	12	15	–	dB
Return Loss 1	RL1	f = 0.01 to 1.0 GHz	13	18	–	dB
Return Loss 2	RL2	f = 1.0 to 2.5 GHz	8	12	–	dB
0.1 dB Loss Compression Input Power ^{Note 1}	P _{in (0.1 dB)}	f = 1.0 GHz	+10	+15	–	dBm
1 dB Loss Compression Input Power ^{Note 2}	P _{in (1 dB)}	f = 1.0 GHz	–	+20	–	dBm
Supply Current	I _{DD}	V _{DD} = V _{cont} = 2.8 V, RF off	–	0.01	1	μA
Switch Control Current	I _{cont}	V _{DD} = V _{cont} = 2.8 V, RF off	–	0.01	1	μA
Switch Control Speed	t _{sw}	f = 1.0 GHz	–	0.4	1	μs


Notes 1. P_{in (0.1 dB)} is measured the input power level when the insertion loss increases more 0.1 dB than that of linear range.

2. P_{in (1 dB)} is measured the input power level when the insertion loss increases more 1 dB than that of linear range.

Caution DC blocking capacitors are necessary. Please do not supply any DC bias to the terminals (INPUT1, INPUT2, OUTPUT1, OUTPUT2).

The value of DC blocking capacitors should be chosen to accommodate the frequency of operation, bandwidth, switching speed and the condition with actual board of your system.


EVALUATION CIRCUIT

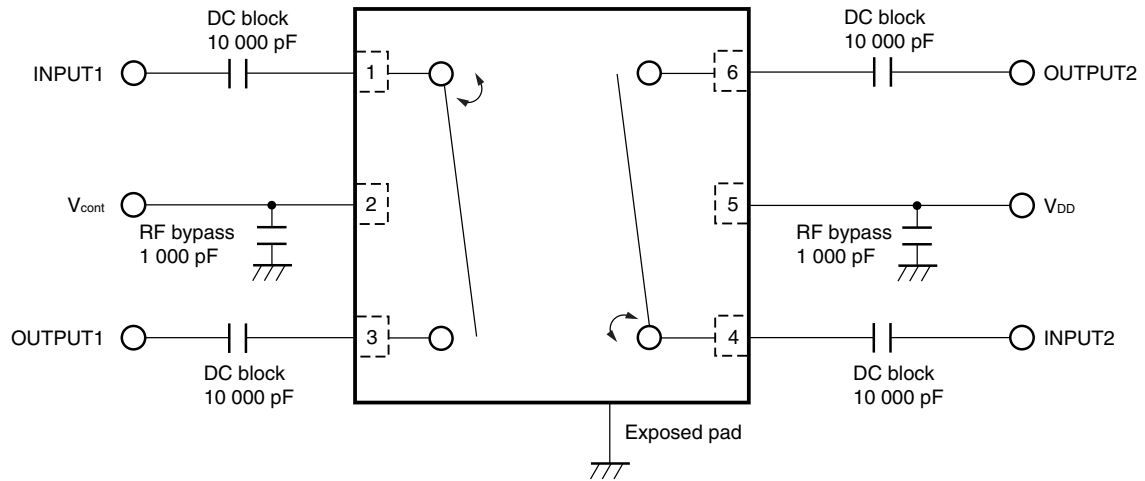

Caution This IC has pull down resistances inside between each RF line and GND line, which bias each RF pin internally to GND, then the IC cannot be used for DC switching.

The application circuits and their parameters are for reference only and are not intended for use in actual design-ins.






ILLUSTRATION OF THE TEST CIRCUIT ASSEMBLED ON EVALUATION BOARD

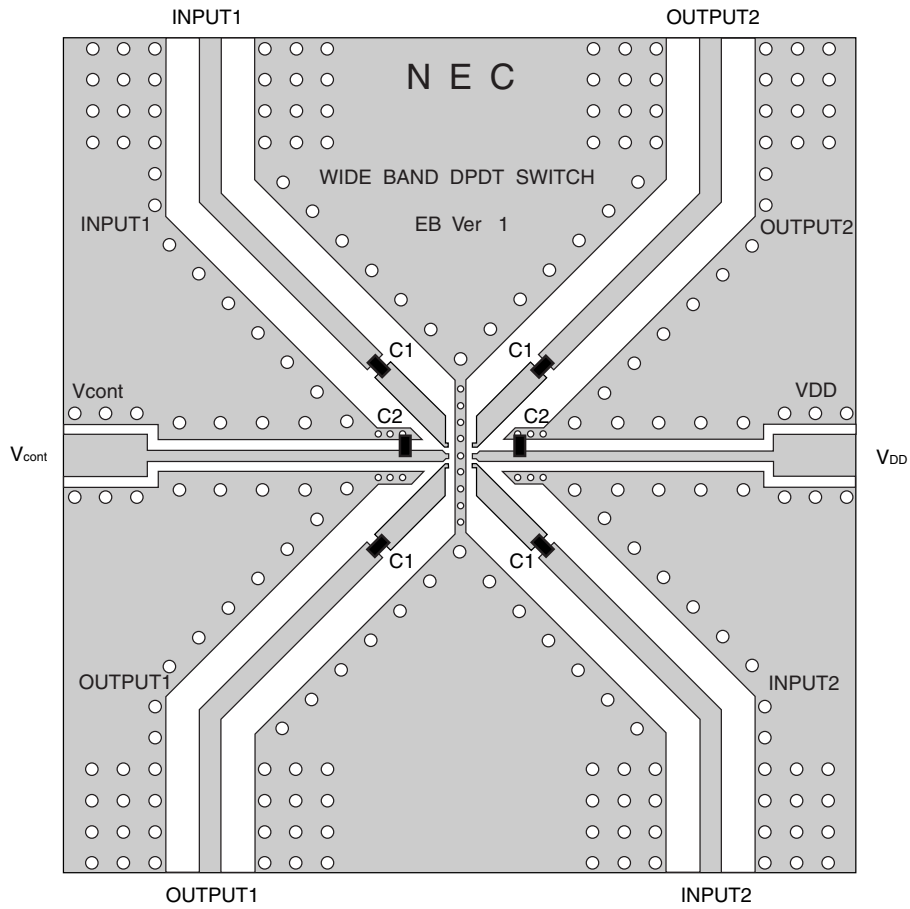





USING THE NEC EVALUATION BOARD

Symbol	Values
C1	1 0000 pF
C2	1 000 pF

TYPICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, $V_{DD} = 2.8\text{ V}$, $V_{cont(H)} = 2.8\text{ V}$, $V_{cont(L)} = 0\text{ V}$, $P_{in} = 0\text{ dBm}$, $Z_0 = 50\ \Omega$, DC blocking capacitors = 10 000 pF, unless otherwise specified)

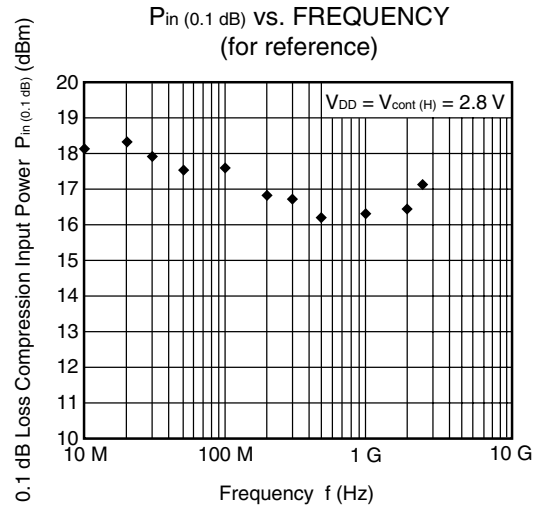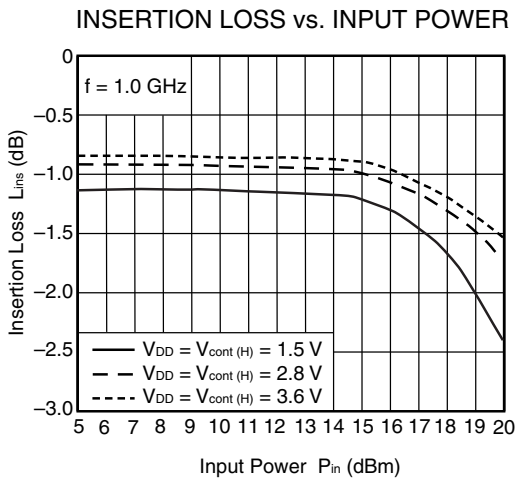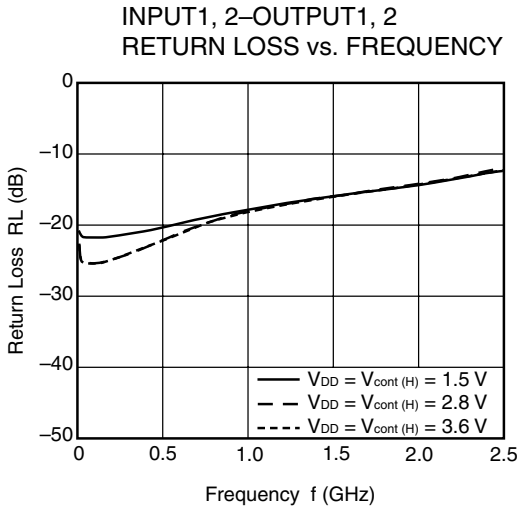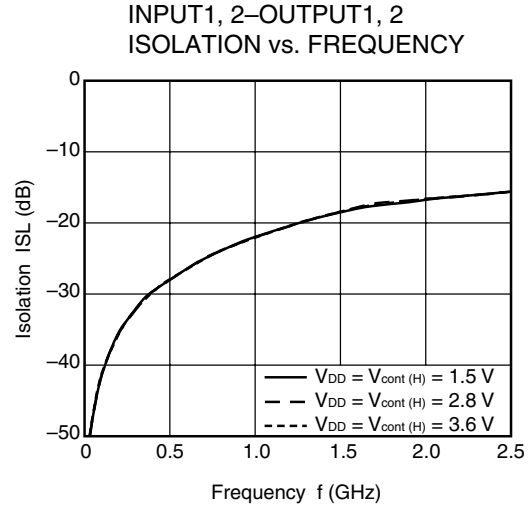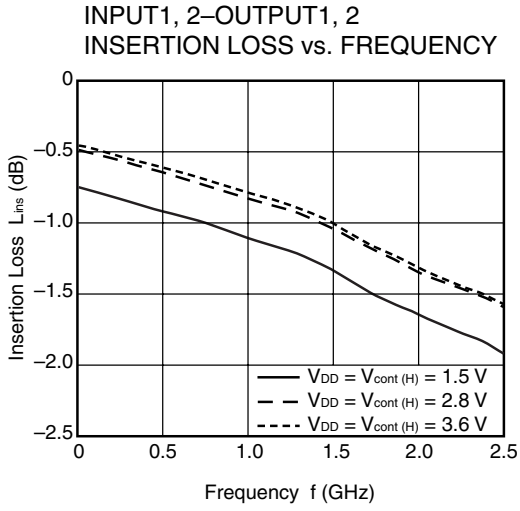

Remark The graphs indicate nominal characteristics.

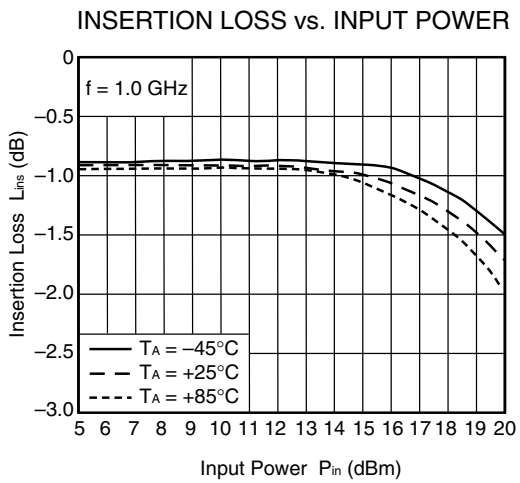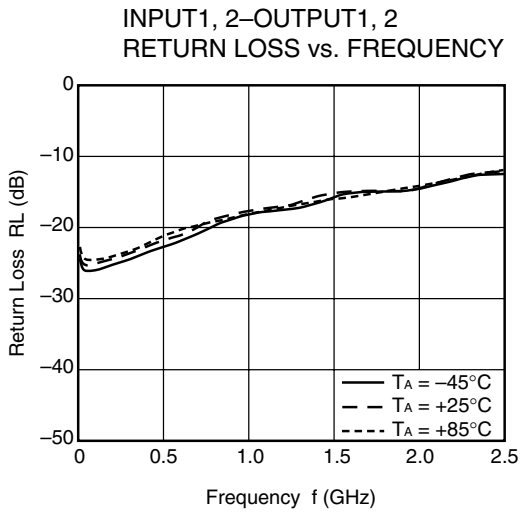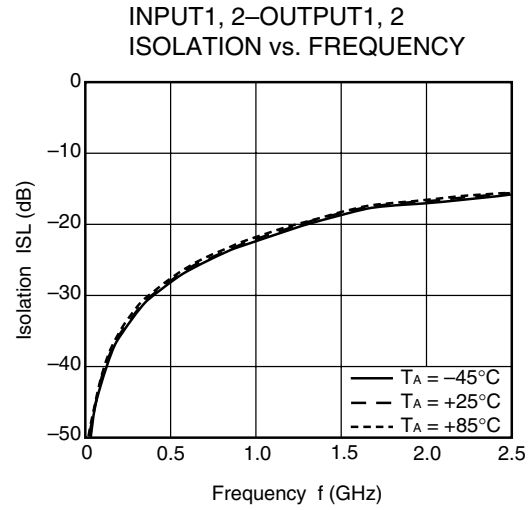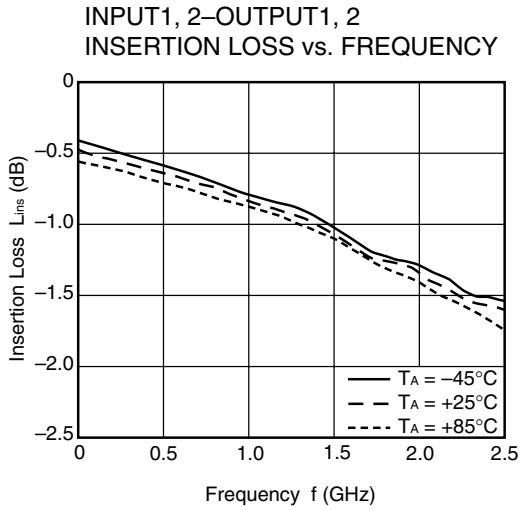


Remark The graphs indicate nominal characteristics.


MOUNTING PAD AND SOLDER MASK LAYOUT DIMENSIONS

6-PIN PLASTIC TSON (UNIT: mm)

MOUNTING PAD

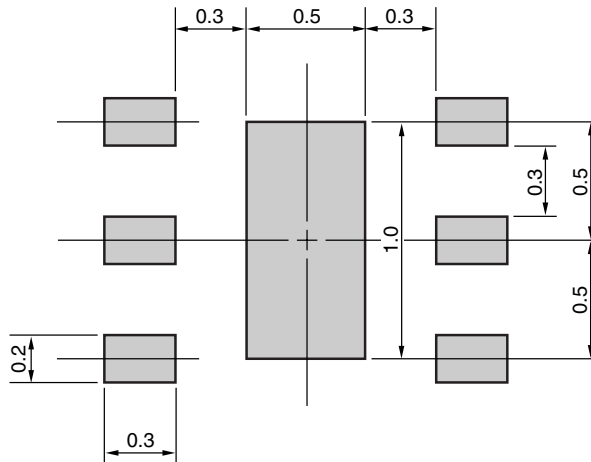

SOLDER MASK

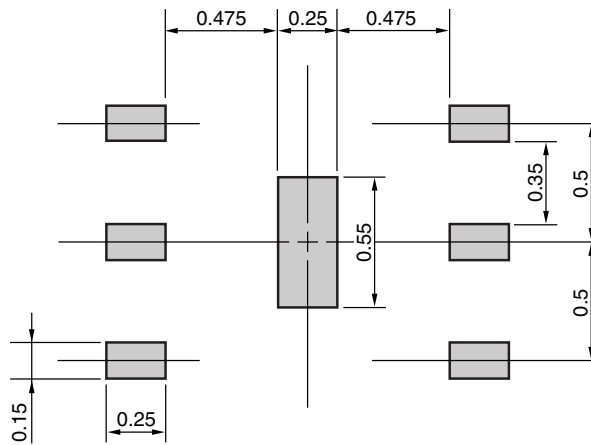


Solder thickness : 0.08 mm

Remark The mounting pad and solder mask layouts in this document are for reference only. When designing PCB, please consider workability of mounting, solder joint reliability, prevention of solder bridge and so on, in order to optimize the design.

PACKAGE DIMENSIONS

6-PIN PLASTIC TSON (T6N) (UNIT: mm)

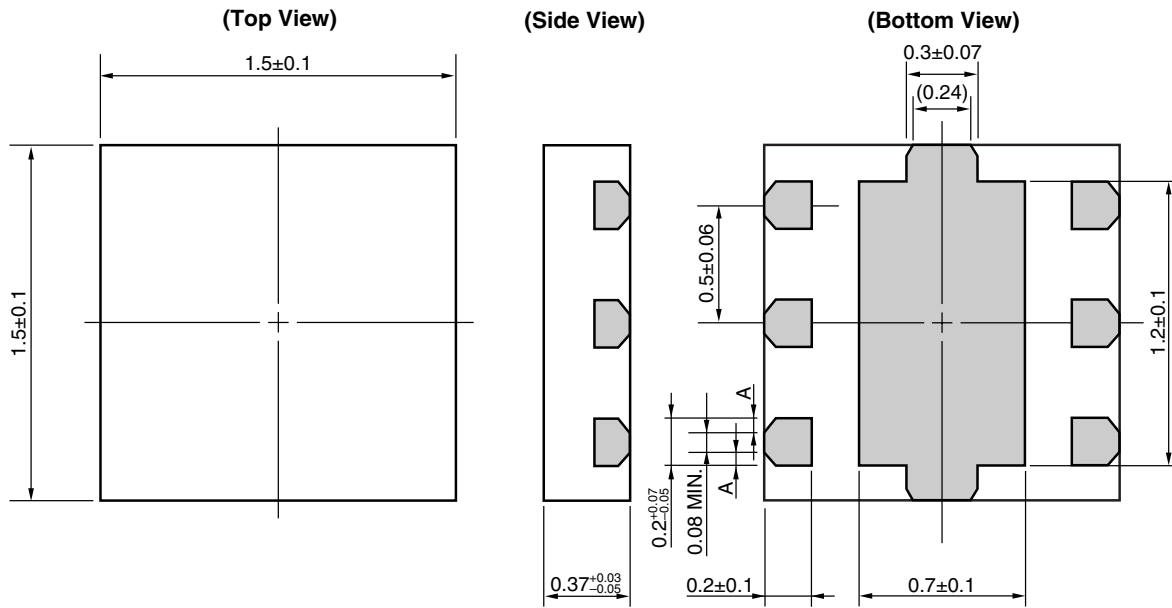

Remark A>0

() : Reference value

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions	Condition Symbol
Infrared Reflow	Peak temperature (package surface temperature)	: 260°C or below
	Time at peak temperature	: 10 seconds or less
	Time at temperature of 220°C or higher	: 60 seconds or less
	Preheating time at 120 to 180°C	: 120±30 seconds
	Maximum number of reflow processes	: 3 times
	Maximum chlorine content of rosin flux (% mass)	: 0.2%(Wt.) or below
Partial Heating	Peak temperature (terminal temperature)	: 350°C or below
	Soldering time (per side of device)	: 3 seconds or less
	Maximum chlorine content of rosin flux (% mass)	: 0.2%(Wt.) or below

Caution Do not use different soldering methods together (except for partial heating).

- **The information in this document is current as of February, 2009. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".
The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.
"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.
"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).
"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).