DWG. NO.	SD601-526-1410Y

REV	DESCRIPTION	BY DATE	APPD
B	Revised per ER1925	RM 2/21/07	APPD

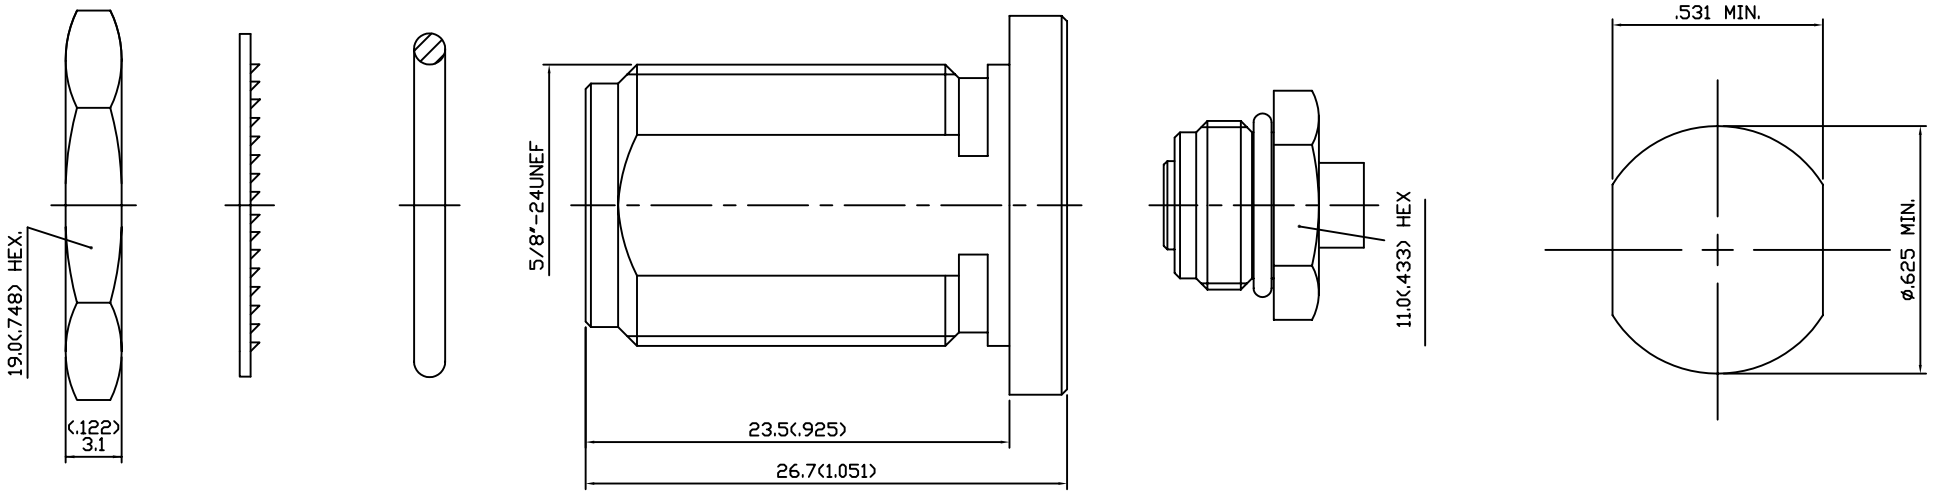

1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC-11 GHz
1.2 NOMINAL IMPEDANCE: 50 OHM
1.3 WORKING VOLTAGE: 1000 VOLTS MAX.
1.4 PROOF VOLTAGE: 2500 VOLTS
1.5 VSWR: 1.3

2.0 MATERIALS

2.1 BODIES: BRASS PER JIS-C3604
2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
2.3 CENTER CONTACT PLATING: .000030 MIN. GOLD OVER NICKEL
2.4 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 CENTER CONTACT NUT: 0.000030 MIN. GOLD PLATE OVER NICKEL.
3.2 ALL OTHER METAL PARTS: 0.000100 MIN. NICKEL PLATE.

4.0 MECHANICAL

4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A
4.2 FOR USE WITH RG402 OR SIMILAR STYLE CABLE
4.3 CABLE ATTACHMENT: OUTER: SOLDER, INNER: SOLDER

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C



STRIPPING DIMENSION

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMALS .XX ± 0.01/0.25
.XXX ± 0.005/0.127
ANGLES ± 2° SCALE:

CUSTOMER DRAWING

DRAWN	DATE	CHECKED	DATE
JWH	10/26/00		
APPROVED	DATE	APPROVED	DATE
RM	2/21/07		

WinchesterElectronics
Winchester Electronics Corporation
62 Barnes Industrial Road North
Wallingford, Connecticut 06492

TITLE: TYPE N BULKHEAD JACK

A	SD601-526-1410Y	SHT. 1	OF 1	REV. B

Downloaded from Elcodis.com electronic components distributor