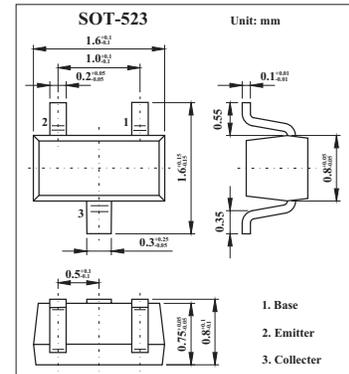


NPN General Purpose Transistors

KC847T(BC847T)

■ Features

- Low current (max. 100 mA)
- Low voltage (max. 45 V).

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector-base voltage	V_{CB0}	50	V
Collector-emitter voltage	V_{CE0}	45	V
Emitter-base voltage	V_{EB0}	5	V
Collector current (DC)	I_c	100	mA
Peak collector current	I_{CM}	200	mA
power dissipation	P_D	150	mW
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-65 to +150	$^\circ\text{C}$

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
collector cut-off current	I_{CBO}	$I_E = 0; V_{CB} = 30\text{ V}$			15	nA
		$I_E = 0; V_{CB} = 30\text{ V}; T_j = 150^\circ\text{C}$			5	μA
emitter cut-off current	I_{EBO}	$I_C = 0; V_{EB} = 5\text{ V}$			100	nA
DC current gain	h_{FE}	$I_C = 2\text{ mA}; V_{CE} = 5\text{ V}$		110	220	
			KC847AT	200	450	
			KC847CT	420	800	
collector-emitter saturation voltage	V_{CEsat}	$I_C = 10\text{ mA}; I_B = 0.5\text{ mA}$			200	mV
		$I_C = 100\text{ mA}; I_B = 5\text{ mA}; *$			400	mV
base-emitter voltage	V_{BE}	$I_C = 2\text{ mA}; V_{CE} = 5\text{ V}$	580		700	mV
		$I_C = 10\text{ mA}; V_{CE} = 5\text{ V}$			770	mV
collector capacitance	C_c	$I_E = I_C = 0; V_{CB} = 10\text{ V}; f = 1\text{ MHz}$			1.5	pF
emitter capacitance	C_e	$I_C = I_E = 0; V_{EB} = 500\text{ mV}; f = 1\text{ MHz}$		11		pF
noise figure	F	$I_C = 200\ \mu\text{A}; V_{CE} = 5\text{ V}; R_s = 2\text{ k}\Omega; f = 1\text{ kHz}; B = 200\text{ Hz}$			10	dB
transition frequency	f_T	$I_C = 10\text{ mA}; V_{CE} = 5\text{ V}; f = 100\text{ MHz}$	100			MHz

* Pulse test: $t_p \leq 300\text{ ms}; \delta \leq 0.02$.

■ Marking

NO.	KC847AT	KC847BT	KC847CT
Marking	1E	1F	1G