


SRF2020-SRF20150

Isolated 20.0AMP. Schottky Barrier Rectifiers

ITO-220AB

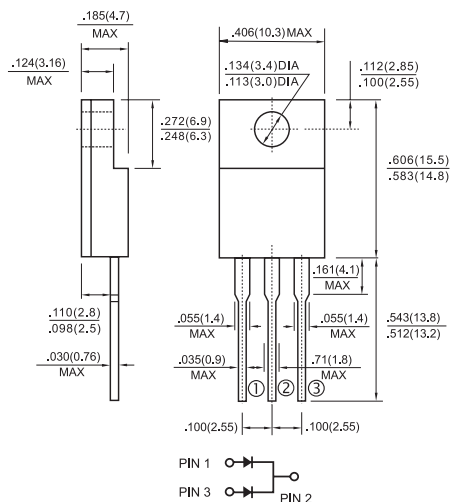

Features

- ✧ For surface mounted application
- ✧ Low power loss, high efficiency
- ✧ High current capability, low VF
- ✧ High reliability
- ✧ Epitaxial construction
- ✧ Guard-ring for transient protection

Mechanical Data

- ✧ Cases: ITO-220AB molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Polarity: As marked
- ✧ High temperature soldering guaranteed:
260°C/10 seconds .25", (6.35mm) from case.
- ✧ Weight: 2.24 grams
- ✧ Mounting torque: 5 in – 1bs. max.

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SRF 2020	SRF 2030	SRF 2040	SRF 2050	SRF 2060	SRF 2090	SRF 20100	SRF 20150	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	90	100	150	V	
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	63	70	105	V	
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	90	100	150	V	
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	20								A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	200								A	
Maximum Instantaneous Forward Voltage @ 10.0A	V_F	0.55		0.70		0.92		1.02		V	
Maximum D.C. Reverse Current @ $T_c=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_c=100^\circ\text{C}$	I_R	0.5					0.1				mA
		15		10		5.0			mA		
Typical Junction Capacitance (Note 2)	C_j	440			300		280			pF	
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	1.5									°C/W
Operating Junction Temperature Range	T_J	-65 to +125					-65 to +150				°C
Storage Temperature Range	T_{STG}	-65 to +150									°C

- Notes: 1. Thermal Resistance from Junction to Case Per Leg, with Heatsink size (4"x6"x0.25") Al-Plate.
2. Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.

<http://www.luguang.cn>

mail:lge@luguang.cn

SRF2020-SRF20150

Isolated 20.0AMP. Schottky Barrier Rectifiers

RATINGS AND CHARACTERISTIC CURVES (SRF2020 THRU SRF20150)

FIG.1- FORWARD CURRENT DERATING CURVE

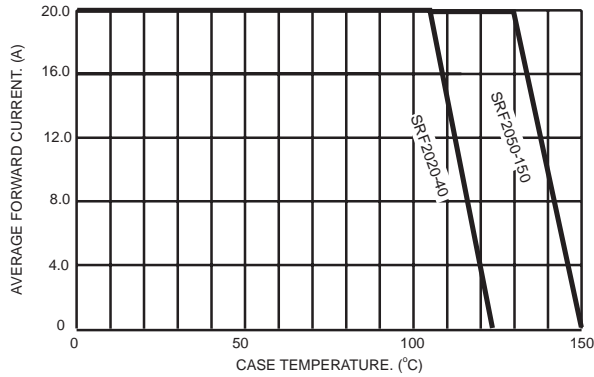


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

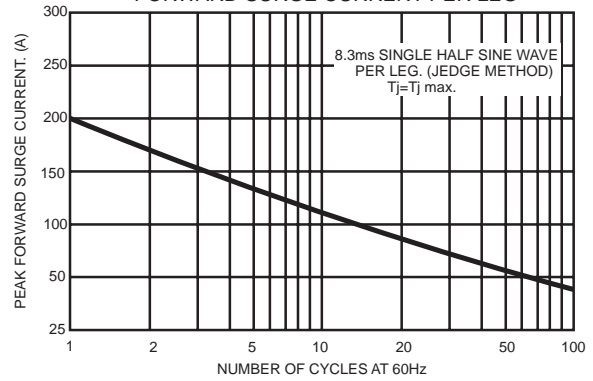


FIG.3- TYPICAL FORWARD CHARACTERISTICS PER LEG

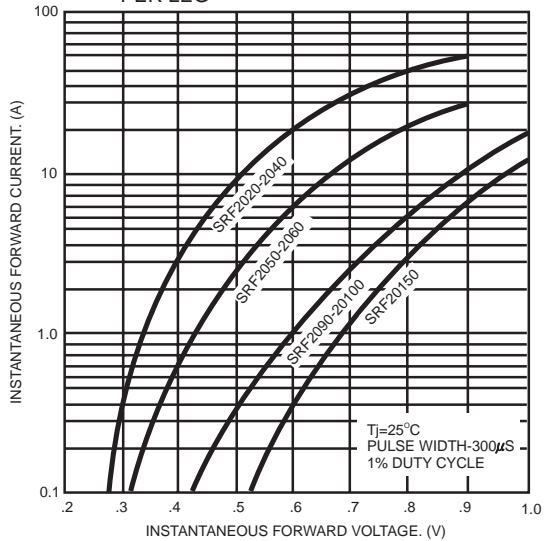


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

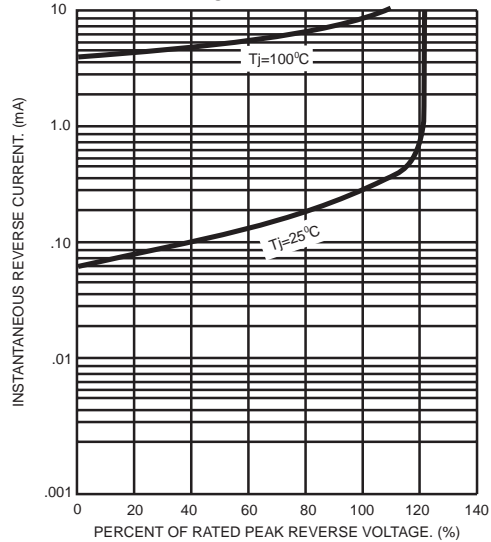


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

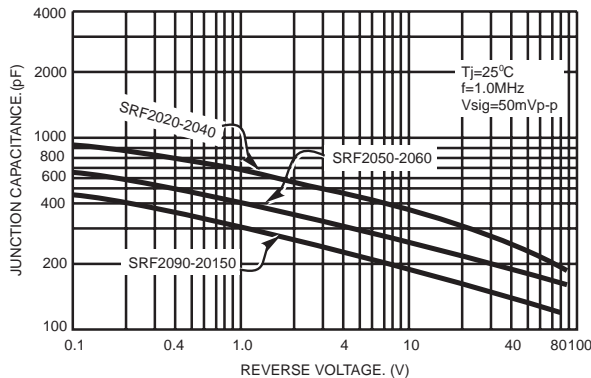


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

