


T-1^{3/4} Two Leaded Tri-State LED Lamps

FEATURES

- Bi-color LED lamp
- White diffused lens

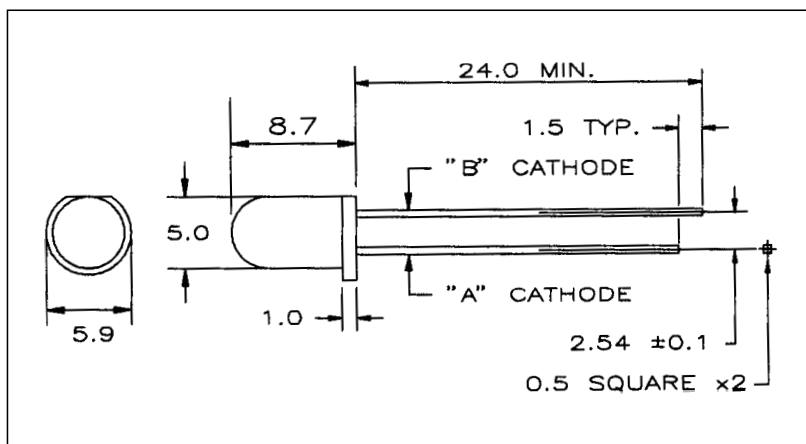

MAXIMUM RATINGS (Ta = 25°C)

PART NO.		FORWARD CURRENT (I _F) (mA)	REVERSE VOLTAGE (V _R) (V)	POWER DISSIPATION (P _D) (mW)	OPERATING TEMPERATURE (T _{OP}) (°C)	STORAGE TEMPERATURE (T _{STG}) (°C)
MT5491-RG	(R)	30	5.0	85	-25~+85	-25~+100
	(G)	30	5.0	85	-25~+85	-25~+100
MT5491-HRG	(HR)	30	5.0	85	-25~+85	-25~+100
	(G)	30	5.0	85	-25~+85	-25~+100
MT5491-URG	(UR)	30	4.0	70	-25~+85	-25~+100
	(G)	30	5.0	85	-25~+85	-25~+100
MT5491-YG	(Y)	30	5.0	85	-25~+85	-25~+100
	(G)	30	5.0	85	-25~+85	-25~+100

OPTO-ELECTRICAL CHARACTERISTICS (Ta = 25°C)

PART NO.		MATERIAL	LENS COLOR	VIEWING ANGLE typ.	LUMIN. INT. (mcd)		FORWARD VOLTAGE (V)			REVERSE CURRENT		PEAK WAVE LENGTH
					typ.	@mA	typ.	max.	@mA	µA	Vr	nm
MT5491-RG	(R)	GaP	White Diff	120°	6.2	20	2.1	3.0	20	100	5	700
	(G)	GaP	White Diff	120°	30.6	20	2.1	3.0	20	100	5	567
MT5491-HRG	(HR)	GaAsP/GaP	White Diff	120°	35.4	20	2.1	3.0	20	100	5	635
	(G)	GaP	White Diff	120°	30.6	20	2.1	3.0	20	100	5	567
MT5491-URG	(UR)	GaAlAs	White Diff	118°	240	20	1.9	2.5	20	100	4	660
	(G)	GaP	White Diff	118°	30.6	20	2.1	3.0	20	100	5	567
MT5491-YG	(Y)	GaAsP/GaP	White Diff	120°	25.2	20	2.1	3.0	20	100	5	585
	(G)	GaP	White Diff	120°	30.6	20	2.1	3.0	20	100	5	567



120 Broadway • Menands, New York 12204

Toll Free: (800) 98-4LEDS • Fax: (518) 432-7454

For up-to-date product info visit our web site at www.marktechopto.com

All specifications subject to change.