




**Series
Polypropylene
and Foil
Capacitors**

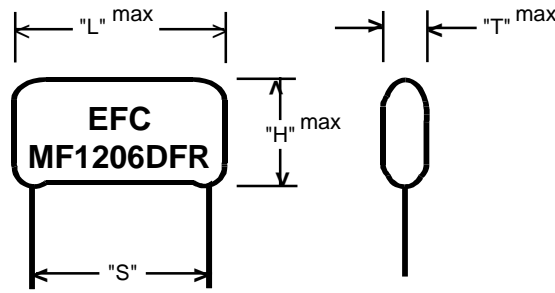

MF1206DFR

**Epoxy Dipped
(Radial Leads)**

Lead Specs. - Tinned Copperweld

L	S	DIA.
18.5	15.0	0.8
26.0	22.5	0.8
31.0	27.5	0.8
44.0	38.0	0.8

(All dimensions in millimeters)

DIMENSIONS and RATINGS

Cap.	MF1206DFR-3 400VDC/350VAC			MF1206DFR-3 630VDC/400VAC			MF1206DFR-3 1000VDC/500VAC			MF1206DFR-3 1600VDC/550VAC			MF1206DFR-3 2000VDC/600VAC								
	T	H	L	T	H	L	T	H	L	T	H	L	T	H	L						
.001	4.5	9.0	18.5	4.5	9.0	18.5	4.5	9.0	18.5	5.0	10.0	18.5	6.0	12.0	18.5						
.0012	4.5	9.0	18.5	4.5	9.0	18.5	4.5	9.0	18.5	5.5	10.0	18.5	6.5	12.0	18.5						
.0015	4.5	9.0	18.5	4.5	9.0	18.5	5.0	9.5	18.5	5.5	11.0	18.5	7.0	13.0	18.5						
.0022	4.5	9.0	18.5	4.5	9.0	18.5	5.0	11.0	18.5	6.5	12.5	18.5	8.0	14.0	18.5						
.0027	4.5	9.0	18.5	4.5	9.0	18.5	6.0	12.0	18.5	7.0	13.0	18.5	7.0	13.0	26.0						
.0039	4.5	9.0	18.5	5.0	10.0	18.5	7.0	13.0	18.5	8.0	14.5	18.5	7.5	14.5	26.0						
.0047	4.5	9.0	18.5	5.5	10.5	18.5	7.5	13.5	18.5	7.0	13.0	18.5	8.5	16.0	26.0						
.0056	5.0	9.5	18.5	5.5	11.0	18.5	8.0	14.0	18.5	8.0	14.0	18.5	9.0	16.5	26.0						
.0068	5.0	10.0	18.5	6.0	12.0	18.5	8.5	15.0	18.5	8.5	15.0	26.0	9.5	18.0	26.0						
.0082	5.5	11.0	18.5	6.5	12.5	18.5	8.5	16.0	18.5	8.5	16.0	26.0	9.0	16.5	31.0						
.01	6.0	12.0	18.5	7.0	13.0	18.5	7.5	14.0	26.0	9.0	17.0	26.0	9.5	17.5	31.0						
.012	6.5	12.5	18.5	7.5	14.0	18.5	8.5	15.5	26.0	9.5	18.5	26.0	10.0	19.0	31.0						
.015	7.0	13.0	18.5	8.5	15.5	18.5	9.0	16.5	26.0	9.5	17.0	31.0	11.0	21.0	31.0						
.018	7.5	13.5	18.5	7.5	13.5	26.0	9.5	17.0	26.0	10.0	19.0	31.0	12.0	22.0	31.0						
.022	8.5	15.0	18.5	8.5	15.5	26.0	9.0	16.5	31.0	11.0	20.5	31.0	13.0	24.0	31.0						
.027	9.0	16.0	18.5	9.0	16.0	26.0	9.5	17.5	31.0	12.0	22.0	31.0	12.0	22.0	44.0						
.033	8.0	14.0	26.0	9.5	17.0	26.0	10.5	20.0	31.0	13.0	24.0	31.0	13.0	24.0	44.0						
.039	8.5	15.5	26.0	9.5	18.0	26.0	11.0	21.0	31.0	12.0	22.0	44.0	14.0	26.0	44.0						
.047	9.0	16.5	26.0	9.0	16.5	31.0	12.5	22.0	31.0	13.0	24.0	44.0	15.0	28.0	44.0						
.056	9.5	17.0	26.0	9.5	18.0	31.0	13.0	24.0	31.0	13.5	25.0	44.0									
.068	9.5	18.0	26.0	10.0	19.5	31.0	12.0	21.5	44.0	15.0	27.5	44.0									
.082	9.5	18.0	31.0	11.5	21.0	31.0	13.0	24.0	44.0	16.5	30.0	44.0									
.1	10.0	19.0	31.0	12.5	22.0	31.0	14.0	26.0	44.0	18.0	34.0	44.0									
.12	11.0	20.0	31.0	11.5	21.0	44.0	15.5	28.0	44.0												
.15	12.0	22.0	31.0	12.5	22.0	44.0	17.0	32.0	44.0												
.18	13.0	24.0	31.0	13.0	24.0	44.0	19.0	35.0	44.0												
.22	12.0	22.0	44.0	14.5	26.5	44.0	21.0	37.0	44.0												
.27	13.0	24.0	44.0	16.0	29.0	44.0															
.33	14.0	26.0	44.0	17.5	33.0	44.0															
.39	15.0	27.0	44.0	19.0	35.0	44.0															
.47	16.5	30.0	44.0	21.0	37.0	44.0															

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705

Phone (203) 755-5629 * E-Mail: efc@filmcapacitors.com * FAX (203) 755-0659