




**Snubber Capacitors
Polypropylene**

MF1206TF

**Oval
Wrap and Fill**

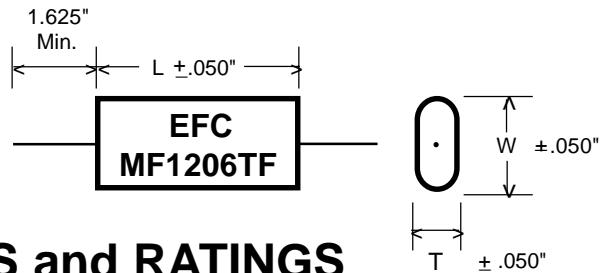

DIMENSIONS and RATINGS

| CAP. μF | MF1206TF-3 1000VDC/350VAC | | | MF1206TF-3 1250VDC/400VAC | | |
|-----------------------|---------------------------|------------------|------------------|---------------------------|------------------|------------------|
| | T inches (mm) | H inches (mm) | L inches (mm) | T inches (mm) | H inches (mm) | L inches (mm) |
| 0.001 | 0.130 (3.4) | 0.260 (6.6) | 0.750 (19.1) | 0.160 (4.1) | 0.290 (7.2) | 0.750 (19.1) |
| 0.0012 | 0.150 (3.9) | 0.280 (7.1) | 0.750 (19.1) | 0.180 (4.6) | 0.300 (7.7) | 0.750 (19.1) |
| 0.0015 | 0.189 (4.5) | 0.300 (7.7) | 0.750 (19.1) | 0.210 (5.2) | 0.330 (8.4) | 0.750 (19.1) |
| 0.0022 | 0.210 (5.3) | 0.370 (9.5) | 0.750 (19.1) | 0.260 (6.6) | 0.390 (9.8) | 0.750 (19.1) |
| 0.0027 | 0.240 (6.0) | 0.400 (10.3) | 0.750 (19.1) | 0.160 (4.1) | 0.290 (7.3) | 0.968 (24.6) |
| 0.0033 | 0.269 (6.5) | 0.450 (11.5) | 0.750 (19.1) | 0.180 (4.6) | 0.310 (7.8) | 0.968 (24.6) |
| 0.0039 | 0.160 (4.1) | 0.290 (7.3) | 0.968 (24.6) | 0.190 (4.7) | 0.350 (8.9) | 0.968 (24.6) |
| 0.0047 | 0.180 (4.6) | 0.310 (7.8) | 0.968 (24.6) | 0.210 (5.3) | 0.380 (9.6) | 0.968 (24.6) |
| 0.0056 | 0.200 (5.1) | 0.330 (7.8) | 0.968 (24.6) | 0.230 (6.0) | 0.400 (10.2) | 0.968 (24.6) |
| 0.0068 | 0.230 (5.8) | 0.350 (9.0) | 0.968 (24.6) | 0.270 (6.8) | 0.430 (11.0) | 0.968 (24.6) |
| 0.0082 | 0.240 (6.1) | 0.410 (10.3) | 0.968 (24.6) | 0.290 (7.3) | 0.480 (12.2) | 0.968 (24.6) |
| 0.01 | 0.270 (6.9) | 0.440 (11.1) | 0.968 (24.6) | 0.300 (7.6) | 0.500 (12.6) | 0.968 (24.6) |
| 0.012 | 0.300 (7.7) | 0.470 (12.0) | 0.968 (24.6) | 0.340 (8.6) | 0.530 (13.6) | 0.968 (24.6) |
| 0.015 | 0.350 (8.9) | 0.520 (13.1) | 0.968 (24.6) | 0.340 (8.6) | 0.540 (13.7) | 1.190 (30.2) |
| 0.018 | 0.380 (9.6) | 0.570 (14.6) | 0.968 (24.6) | 0.360 (9.2) | 0.610 (15.4) | 1.190 (30.2) |
| 0.022 | 0.370 (9.4) | 0.540 (13.6) | 1.190 (30.2) | 0.410 (10.4) | 0.650 (16.6) | 1.190 (30.2) |
| 0.027 | 0.420 (9.7) | 0.590 (14.9) | 1.190 (30.2) | 0.470 (11.8) | 0.710 (18.0) | 1.190 (30.2) |
| 0.033 | 0.470 (12.0) | 0.640 (16.2) | 1.190 (30.2) | | | |
| 0.039 | 0.520 (13.2) | 0.690 (17.5) | 1.190 (30.2) | | | |

| CAP. μF | MF1206TF-3 1600VDC/500VAC | | | MF1206TF-3 2000VDC/560VAC | | |
|-----------------------|---------------------------|------------------|------------------|---------------------------|------------------|------------------|
| | T inches (mm) | H inches (mm) | L inches (mm) | T inches (mm) | H inches (mm) | L inches (mm) |
| 0.001 | 0.160 (3.9) | 0.400 (10.2) | 0.750 (19.1) | 0.130 (3.3) | 0.370 (9.5) | 0.750 (19.1) |
| 0.0012 | 0.180 (4.5) | 0.420 (10.7) | 0.750 (19.1) | 0.130 (3.3) | 0.370 (9.5) | 0.750 (19.1) |
| 0.0015 | 0.210 (5.3) | 0.450 (11.5) | 0.750 (19.1) | 0.130 (3.3) | 0.370 (9.5) | 0.750 (19.1) |
| 0.0022 | 0.180 (4.5) | 0.300 (7.7) | 0.968 (24.6) | 0.170 (4.2) | 0.410 (10.4) | 0.968 (24.6) |
| 0.0027 | 0.200 (5.1) | 0.330 (8.3) | 0.968 (24.6) | 0.190 (4.9) | 0.440 (11.1) | 0.968 (24.6) |
| 0.0033 | 0.210 (5.3) | 0.380 (9.6) | 0.968 (24.6) | 0.220 (5.6) | 0.470 (11.8) | 0.968 (24.6) |
| 0.0039 | 0.230 (5.9) | 0.400 (10.2) | 0.968 (24.6) | 0.250 (6.3) | 0.490 (12.5) | 0.968 (24.6) |
| 0.0047 | 0.250 (6.4) | 0.450 (11.4) | 0.968 (24.6) | 0.280 (7.1) | 0.530 (13.4) | 0.968 (24.6) |
| 0.0056 | 0.280 (7.1) | 0.480 (12.1) | 0.968 (24.6) | 0.320 (8.0) | 0.560 (14.2) | 0.968 (24.6) |
| 0.0068 | 0.300 (7.5) | 0.540 (13.8) | 0.968 (24.6) | 0.360 (9.1) | 0.600 (15.3) | 0.968 (24.6) |
| 0.0082 | 0.340 (8.5) | 0.580 (14.7) | 0.968 (24.6) | 0.320 (8.1) | 0.570 (14.4) | 0.968 (24.6) |
| 0.01 | 0.310 (7.9) | 0.550 (14.1) | 0.968 (24.6) | 0.360 (9.3) | 0.610 (15.5) | 0.968 (24.6) |
| 0.012 | 0.350 (8.9) | 0.590 (15.1) | 0.968 (24.6) | 0.410 (10.4) | 0.650 (15.6) | 0.968 (24.6) |
| 0.015 | 0.400 (10.2) | 0.650 (16.4) | 1.190 (30.2) | 0.470 (12.0) | 0.720 (18.2) | 1.190 (30.2) |
| 0.018 | 0.450 (11.5) | 0.700 (17.7) | 1.190 (30.2) | | | |

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.

Reidville Industrial Park * 41 Interstate Lane

WATERBURY, CONNECTICUT 06705

PHONE (203) 755-5629 FAX (203) 755-0659