

Frequency Synthesizer

WSN-4G+

50Ω Very Wide Bandwidth 700 to 4000 MHz

The Big Deal

- Very wide bandwidth
- Integrated VCO + PLL
- Fast settling time
- High reliability over temperature changes
- Operating voltage (VCC VCO=+10V, VCC PLL=+22V)
- Size 1.25" x 1.75" x 0.22"



CASE STYLE: KN1368

Product Overview

The WSN-4G+ is a very wide bandwidth Frequency Synthesizer, designed to operate from 700 to 4000 MHz for jammers application. The WSN-4G+ is packaged in a metal case (size of 1.25" x 1.75" x 0.22") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Very wide bandwidth	Extremely wide frequency range 700 - 4000 MHz. These broadband synthesizers boost output levels of +8 dBm, typical spurious performance of -80 dBc or better and low phase noise.
Fast settling time	Less than 30 μ sec within 1deg can be used for settling applications such as jammers etc.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see minicircuits.com


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Frequency Synthesizer

50Ω Very Wide Bandwidth 700 to 4000 MHz

Features

- Very wide bandwidth
- Integrated VCO + PLL
- Fast settling time
- High reliability over temperature changes
- Operating voltage (VCC VCO=+10V, VCC PLL=+22V)
- Size 1.25" x 1.75" x 0.22"

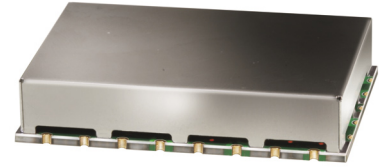

CASE STYLE: KN1368
PRICE: \$274.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


Applications

- Jammers

General Description

The WSN-4G+ is a very wide bandwidth Frequency Synthesizer, designed to operate from 700 to 4000 MHz for jammers application. The WSN-4G+ is packaged in a metal case (size of 1.25" x 1.75" x 0.22") to shield against unwanted signals and noise.

Simplified Schematic

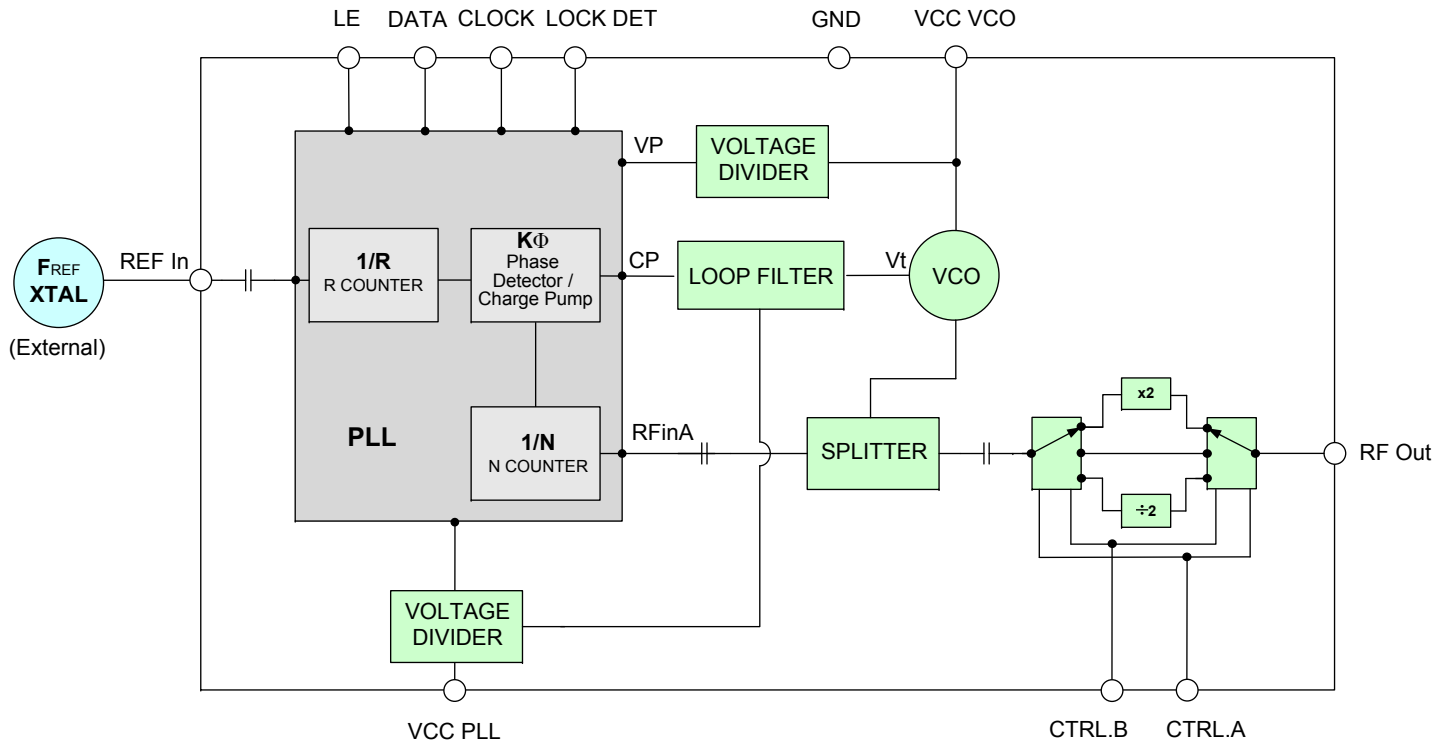

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M130372
EDR-9334/2
WSN-4G+
Category-T27
RAV
110126
Page 2 of 13

Electrical Specifications (over operating temperature -40°C to +85°C)

Parameters	Test Conditions		Min.	Typ.	Max.	Units	
Frequency Range	-		700	-	4000	MHz	
Step Size	-		-	10	-	MHz	
Comparison Frequency	-		-	5	-	MHz	
Settling Time within bands	Within ±1deg. for any 10MHz step	@ 700 to 1110 MHz	-	15	30	μSec	
		@ 1120 to 2220 MHz					
		@ 2230 to 4000 MHz					
Output Power	-		+5	+8	+11	dBm	
SSB Phase Noise	@ 100 Hz	@ 700 to 1110 MHz	-	-93	-	dBc / Hz	
		@ 1120 to 2220 MHz	-	-88	-		
		@ 2230 to 4000 MHz	-	-83	-		
	@ 1 kHz offset	@ 700 to 1110 MHz	-	-106	-98		
		@ 1120 to 2220 MHz	-	-101	-92		
		@ 2230 to 4000 MHz	-	-95	-87		
	@ 10 kHz offset	@ 700 to 1110 MHz	-	-107	-100		
		@ 1120 to 2220 MHz	-	-102	-95		
		@ 2230 to 4000 MHz	-	-97	-90		
	@ 100 kHz offset	@ 700 to 1110 MHz	-	-104	-96		
		@ 1120 to 2220 MHz	-	-100	-90		
		@ 2230 to 4000 MHz	-	-94	-87		
@ 1 MHz offset	@ 700 to 1110 MHz	-	-127	-119			
	@ 1120 to 2220 MHz	-	-121	-114			
	@ 2230 to 4000 MHz	-	-115	-108			
Reference Spurious Suppression	Ref. Freq. 20 MHz	@ 700 to 1110 MHz	-	-97	-75	dBc	
		@ 1120 to 2220 MHz	-	-100	-75		
		@ 2230 to 4000 MHz	-	-95	-75		
Comparison Spurious Suppression	Comp. Freq. 5 MHz	@ 700 to 1110 MHz	-	-89	-70		
		@ 1120 to 2220 MHz	-	-81	-64		
		@ 2230 to 4000 MHz	-	-86	-70		
Non - Harmonic Spurious Suppression		-	-	-90	-		
Harmonic Suppression		-	-	-33	-10		
VCO Power Supply	+10.00		+9.75	+10.00	+10.25		V
PLL Power Supply	+22.00		+21.75	+22.00	+22.25		V
VCO Supply Current	-		-	140	220		mA
PLL Supply Current	-		-	16	25		mA
Reference Input (External)	Frequency	20 (square wave)	-	20	-	MHz	
	Amplitude	1	-	1	-	Vp-p	
	Input impedance	-	-	100	-	KΩ	
	Phase. Noise @ 1 kHz offset	-	-	-145	-	dBc/Hz	
RF Output port Impedance		-	-	50	-	Ω	
Input Logic Level	Input high voltage	-	2.80	-	-	V	
	Input low voltage	-	-	-	0.60	V	
Digital Lock Detect	Locked	-	2.75	-	3.40	V	
	Unlocked	-	-	-	0.40	V	
Input Logic Level for Control A & Control B	Input high voltage	-	3.50	-	-	V	
	Input low voltage	-	-	-	0.50	V	



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Electrical Specifications (over operating temperature -40°C to +85°C) (... continue)

Frequency Synthesizer PLL		ADF4106												
PLL Programming		3-wire serial 3V CMOS												
Register Map	F_Register*	Prescaler Value	Power-Down 2	Current Setting 2*	Current Setting 1	Timer Counter Control	Fastlock Mode	Fastlock Enable	CP 3-State	PD Polarity	Muxout Control	Power-Down 1	Counter Reset	Control Bits
		00	0	XYZ	0000	0	0	0	0	0	001	0	0	11
	N_Register @ 1110 MHz @ 1580 MHz @ 4000 MHz	Reserved	CP Gain	13-Bit B Counter						6-Bit A Counter				Control Bits
		00	1	0000000110111						000100				01
		00	1	0000000100111						000100				01
		00	1	0000000110010						000000				01
R_Register	Reserved	Lock Detect Precision	Test Mode Bits	Anti-Blacklash Width	14-BIT Reference Counter						Control Bits			
	000	1	00	00	00000000000100						00			

* Refer to Charge Pump Settings

Band	Freq. Range [MHz]	X	Y	Z
#1	700-920	0	1	1
	930-1020	1	0	0
	1030-1040	1	0	1
	1050-1070	1	1	0
#2	1080-1110	1	1	1
	1120-1150	0	0	1
	1160-1270	0	1	0
	1280-1840	0	1	1
	1850-2040	1	0	0
	2050-2090	1	0	1
#3	2100-2150	1	1	0
	2160-2220	1	1	1
	2230-2300	0	0	1
	2310-2540	0	1	0
	2550-3680	0	1	1
	3690-4000	1	0	0

Note 1: For frequencies in the 700-1110MHz range the N register should be programed to a frequency which is twice the desired output frequency.

Note 2: For frequencies in the 2230-4000MHz range the N register should be programed to a frequency which is half the desired output frequency.

Frequency Bands Function

Frequency Out [MHz]	Control	
	CTRL.A (PIN # 8)	CTRL.B (PIN # 7)
700-1110	0	1
1120-2220	1	0
2230-4000	0	0
N.A	1	1

Absolute Maximum Ratings

Parameters	Ratings
VCO Supply Voltage	+12V
PLL Supply Voltage	+24V
VCO Power Supply to PLL Power Supply	N.A
Reference Frequency Voltage	-0.3Vmin, +3.6Vmax
Data, Clock, LE Levels	-0.3Vmin, +3.6Vmax
Control A & Control B Levels	-0.3Vmin, +5.0Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Data

FREQUENCY (MHz)	POWER OUTPUT (dBm)			VCO CURRENT (mA)			PLL CURENT (mA)		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
700	8.45	8.53	8.37	116.97	120.03	123.15	15.48	16.91	17.88
780	8.38	8.41	8.08	117.24	120.31	123.36	15.61	17.05	18.02
860	8.31	8.21	7.77	117.49	120.55	123.61	15.75	17.18	18.15
940	8.46	8.24	7.55	117.77	120.86	123.96	15.88	17.32	18.29
1020	8.44	8.16	7.19	118.04	121.15	124.27	16.01	17.46	18.42
1100	8.29	7.98	6.79	118.16	121.32	124.55	16.14	17.59	18.55
1110	8.25	7.95	6.76	118.15	121.33	124.56	16.24	17.69	18.65
1120	8.93	8.52	8.11	106.32	108.99	111.62	15.26	16.71	17.67
1260	8.97	8.62	8.33	107.35	109.92	112.37	15.44	16.90	17.86
1420	8.08	7.98	7.74	107.89	110.45	112.85	15.57	17.04	18.00
1580	7.57	7.50	7.29	108.01	110.57	112.97	15.71	17.18	18.13
1740	7.25	7.34	7.20	108.06	110.59	113.02	15.84	17.32	18.27
1820	7.58	7.53	7.38	108.07	110.61	113.08	15.91	17.38	18.34
2220	8.36	8.12	7.48	108.59	111.41	114.13	16.24	17.72	18.71
2230	7.68	7.83	7.77	151.86	157.66	164.47	15.37	16.85	17.85
2380	6.99	7.45	7.47	155.05	160.35	166.63	15.41	16.91	17.90
2540	6.82	7.18	7.34	159.62	164.68	170.62	15.48	16.98	17.97
2780	8.61	8.23	7.93	165.64	170.67	176.20	15.58	17.09	18.08
3180	9.98	9.20	8.61	170.24	175.81	181.85	15.74	17.26	18.25
3420	9.51	8.90	8.35	171.66	177.40	183.62	15.85	17.37	18.36
4000	7.42	6.77	6.31	170.07	176.42	183.25	15.99	17.51	18.50



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

FREQUENCY (MHz)	HARMONICS (dBc)								
	F0.5			F1.5			F2.5		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
2230	-54.35	-53.86	-54.03	-33.31	-25.02	-17.95	-37.57	-34.51	-31.80
2380	-47.00	-47.10	-48.10	-28.75	-25.24	-21.30	-38.48	-51.42	-44.78
2540	-41.13	-42.00	-43.30	-16.71	-16.94	-17.70	-36.25	-41.77	-44.63
2780	-36.25	-38.22	-38.85	-14.24	-16.60	-18.66	-36.33	-37.93	-40.87
3180	-29.74	-31.90	-31.17	-28.17	-28.33	-26.85	-51.45	-48.08	-47.25
3420	-25.75	-27.36	-25.97	-30.33	-28.06	-27.42	-63.03	-60.80	-61.72
4000	-22.97	-21.18	-17.62	-29.00	-28.66	-32.07	-54.15	-56.10	-59.87

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2			F3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
700	-15.31	-15.61	-14.89	-46.71	-48.29	-48.98
780	-21.96	-22.65	-22.81	-59.03	-62.05	-61.56
860	-36.41	-38.71	-40.30	-54.84	-54.55	-56.44
940	-41.79	-43.34	-45.36	-54.17	-55.26	-56.83
1020	-43.56	-44.65	-47.20	-54.39	-57.80	-59.07
1100	-49.47	-54.33	-56.02	-56.85	-59.35	-59.05
1110	-50.99	-53.61	-55.52	-57.57	-60.62	-59.03
1120	-14.80	-22.47	-24.64	-33.16	-35.49	-35.62
1260	-16.73	-26.38	-23.30	-55.98	-56.29	-61.23
1420	-24.11	-28.20	-23.51	-53.06	-53.28	-54.18
1580	-28.02	-29.59	-26.76	-55.96	-58.28	-54.84
1740	-35.77	-38.39	-37.22	-50.94	-51.90	-50.65
1820	-43.92	-47.83	-48.19	-52.83	-53.32	-52.60
2220	-52.64	-51.50	-49.01	-50.65	-54.10	-58.25
2230	-17.43	-18.89	-19.79	-37.67	-40.59	-46.32
2380	-21.78	-24.65	-26.06	-40.40	-45.94	-53.66
2540	-24.10	-28.59	-33.55	-40.63	-43.82	-47.47
2780	-25.56	-38.14	-34.02	-47.93	-48.91	-47.44
3180	-30.69	-29.49	-29.71	-45.37	-44.83	-45.69
3420	-36.60	-34.13	-34.87	-55.55	-54.82	-55.78
4000	-38.43	-38.60	-40.15	-56.79	-54.46	-52.39



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	+25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
700	-95.47	-111.53	-110.41	-107.56	-128.68
780	-97.38	-107.46	-109.13	-105.84	-128.38
860	-92.08	-105.74	-107.36	-104.55	-128.60
940	-93.79	-104.82	-108.09	-105.43	-126.54
1020	-94.92	-106.65	-107.10	-103.92	-128.51
1100	-93.83	-103.50	-106.06	-102.79	-128.85
1110	-91.42	-104.57	-105.91	-102.18	-129.76
1120	-92.45	-103.99	-105.74	-101.33	-125.33
1260	-94.85	-106.20	-105.65	-102.19	-124.11
1420	-91.79	-103.04	-103.89	-101.12	-122.42
1580	-91.94	-100.69	-102.27	-99.35	-122.22
1740	-88.67	-101.26	-101.70	-98.57	-122.42
1820	-87.70	-100.11	-101.71	-98.70	-122.70
2220	-86.86	-100.58	-100.59	-96.52	-123.83
2230	-85.71	-97.63	-100.10	-95.67	-119.44
2380	-90.99	-96.32	-100.50	-97.02	-117.96
2540	-86.53	-96.66	-98.63	-95.30	-117.47
2780	-86.55	-94.07	-97.32	-94.97	-116.01
3180	-85.45	-94.77	-95.63	-92.76	-115.85
3420	-83.77	-95.01	-95.77	-92.46	-116.15
4000	-84.17	-94.85	-95.31	-92.16	-115.77

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	-45°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
700	-86.70	-106.41	-108.63	-105.97	-127.91
780	-85.53	-104.53	-107.50	-104.35	-128.02
860	-87.41	-104.58	-106.54	-102.35	-128.20
940	-85.54	-105.25	-105.51	-103.28	-126.04
1020	-83.21	-103.36	-105.11	-102.56	-127.35
1100	-87.16	-102.78	-105.26	-102.21	-127.59
1110	-85.33	-103.51	-105.43	-102.03	-128.35
1120	-84.57	-102.15	-104.82	-100.48	-125.86
1260	-83.46	-101.66	-104.70	-101.37	-123.55
1420	-84.15	-99.91	-103.33	-100.46	-122.31
1580	-82.04	-100.89	-101.76	-98.41	-122.36
1740	-84.14	-98.43	-100.20	-96.57	-122.63
1820	-78.27	-98.91	-99.79	-96.23	-122.30
2220	-79.95	-96.83	-98.76	-95.91	-122.29
2230	-79.16	-96.68	-99.30	-94.82	-119.83
2380	-77.19	-95.62	-99.04	-96.56	-118.10
2540	-77.63	-94.88	-97.49	-94.20	-116.72
2780	-77.94	-96.83	-96.27	-93.44	-115.23
3180	-76.11	-91.53	-95.51	-91.59	-115.73
3420	-74.37	-92.54	-94.50	-90.58	-116.42
4000	-73.50	-91.69	-94.42	-91.75	-115.40

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	+85°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
700	-93.07	-105.42	-108.73	-106.14	-127.66
780	-90.86	-106.23	-107.68	-104.77	-127.38
860	-91.27	-106.13	-107.56	-104.29	-126.87
940	-90.26	-104.32	-106.89	-104.55	-124.73
1020	-89.73	-105.47	-106.19	-102.53	-127.26
1100	-86.71	-102.82	-104.23	-100.56	-128.54
1110	-89.80	-102.34	-104.37	-99.99	-129.35
1120	-89.72	-102.53	-105.14	-100.41	-124.38
1260	-90.62	-102.37	-104.15	-100.64	-123.13
1420	-86.13	-101.18	-102.08	-99.75	-121.40
1580	-84.47	-100.28	-101.73	-98.55	-121.07
1740	-84.81	-101.37	-101.35	-98.26	-120.83
1820	-86.44	-98.52	-100.89	-98.12	-120.90
2220	-80.50	-94.69	-98.10	-94.20	-123.53
2230	-82.34	-95.50	-99.28	-94.70	-118.41
2380	-82.32	-96.67	-98.32	-95.29	-116.88
2540	-78.68	-96.60	-97.00	-93.60	-116.47
2780	-79.11	-96.20	-96.67	-93.54	-114.89
3180	-81.25	-95.15	-95.29	-91.77	-114.64
3420	-81.12	-97.37	-95.47	-92.59	-114.95
4000	-76.13	-91.55	-94.36	-91.11	-114.90



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

COMPARISON SPURIOUS ORDER	COMPARISON SPURIOUS @ Fcarrier 910MHz+(0.5n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @ Fcarrier 1670MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @ Fcarrier 3120MHz+(2n*Fcomparison) (dBc) note 1			
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
	-5	-124.00	-123.54	-122.01	-105.92	-110.03	-105.95	-106.89	-101.36	-102.07
-4	-101.00	-96.46	-97.93	-105.20	-110.59	-105.95	-107.73	-97.23	-96.08	
-3	-122.66	-124.00	-122.69	-101.18	-104.41	-99.56	-103.55	-97.18	-113.91	
-2	-81.76	-80.26	-80.66	-91.46	-92.44	-90.97	-106.21	-96.23	-113.88	
-1	-121.40	-119.95	-120.98	-75.10	-74.20	-73.53	-85.54	-85.00	-84.92	
0 ^{note 2}	-	-	-	-	-	-	-	-	-	
+1	-120.35	-121.50	-120.51	-74.98	-73.91	-73.35	-85.91	-84.75	-85.05	
+2	-81.74	-80.46	-80.38	-91.70	-90.83	-89.87	-107.45	-94.34	-114.09	
+3	-124.27	-122.75	-123.25	-99.16	-100.98	-98.53	-108.67	-96.76	-109.56	
+4	-102.12	-97.93	-96.83	-102.37	-104.52	-102.57	-94.99	-92.30	-90.86	
+5	-125.38	-123.26	-122.62	-103.31	-105.41	-103.86	-104.58	-101.55	-102.15	

Note 1: Comparison frequency 5 MHz
 Note 2: All spurs are referenced to carrier signal (n=0).

REFERENCE SPURIOUS ORDER	REFERENCE SPURIOUS @ Fcarrier 910MHz+(0.5n*Freference) (dBc) note 3			REFERENCE SPURIOUS @ Fcarrier 1670MHz+(n*Freference) (dBc) note 3			REFERENCE SPURIOUS @ Fcarrier 3120MHz+(2n*Freference) (dBc) note 3			
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
	-5	-114.92	-113.35	-108.20	-105.31	-121.47	-108.83	-93.78	-95.21	-93.48
-4	-111.00	-109.32	-101.53	-109.68	-114.65	-110.09	-110.20	-97.20	-109.63	
-3	-111.70	-122.88	-109.38	-107.53	-118.66	-112.84	-102.98	-97.93	-100.61	
-2	-111.47	-112.23	-102.41	-113.75	-101.30	-99.17	-106.90	-101.56	-100.68	
-1	-101.25	-97.27	-97.72	-104.98	-109.55	-105.68	-107.59	-97.38	-96.27	
0 ^{note 4}	-	-	-	-	-	-	-	-	-	
+1	-102.77	-98.42	-97.99	-102.38	-106.31	-102.80	-95.14	-92.33	-90.94	
+2	-111.65	-117.97	-105.00	-103.56	-103.07	-97.38	-108.59	-103.21	-102.84	
+3	-112.00	-114.45	-109.13	-111.62	-117.57	-116.41	-103.69	-98.91	-102.11	
+4	-107.46	-106.73	-102.90	-110.99	-114.06	-111.12	-113.05	-98.64	-112.86	
+5	-110.59	-109.59	-108.23	-105.66	-113.97	-114.46	-94.67	-96.00	-94.53	

Note 3: Reference frequency 20 MHz
 Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661















The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Curves

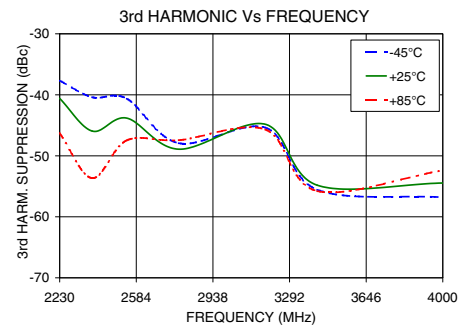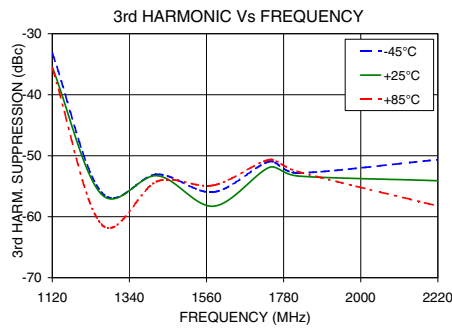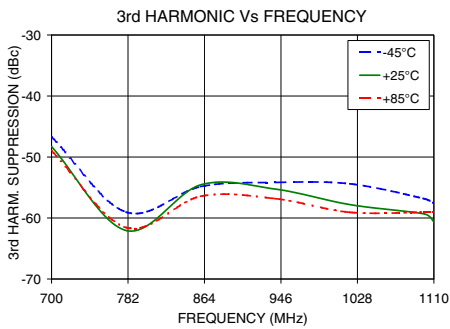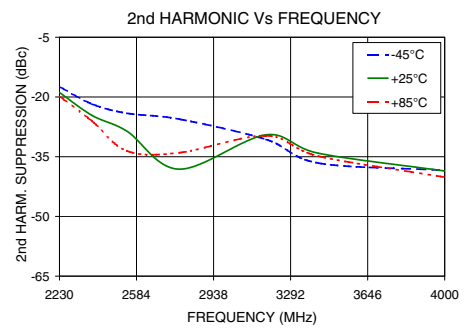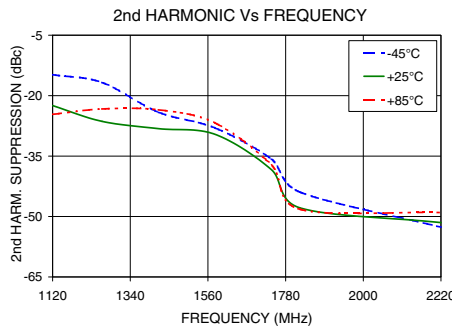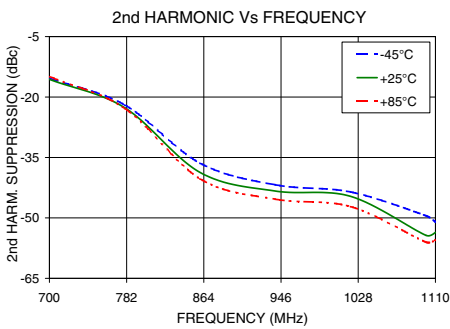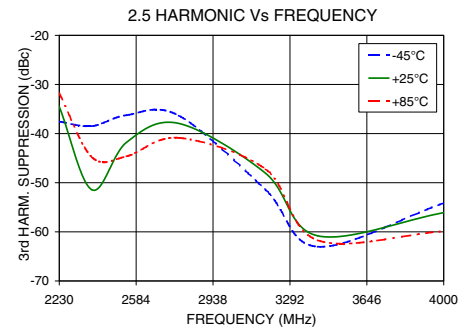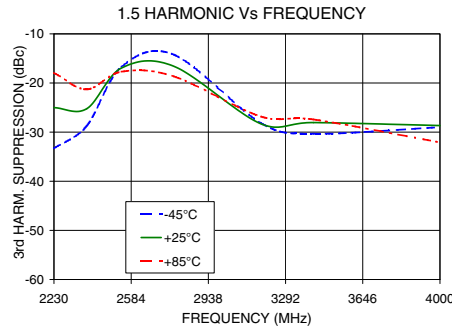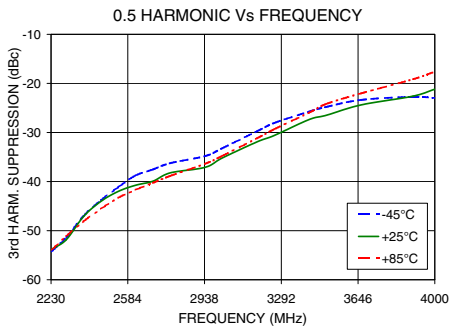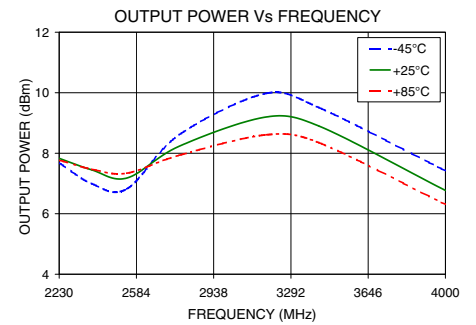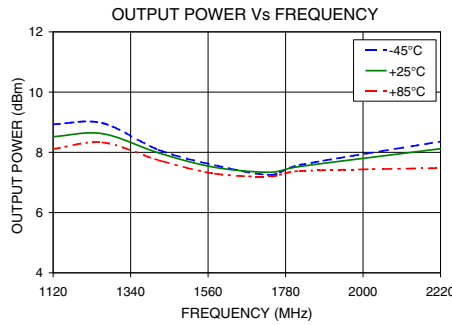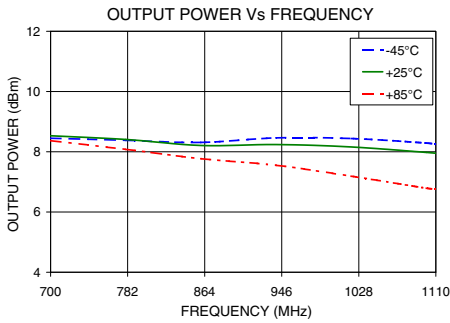













IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

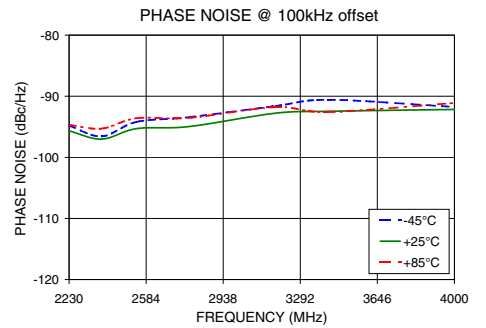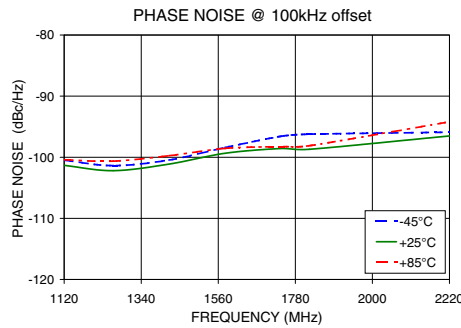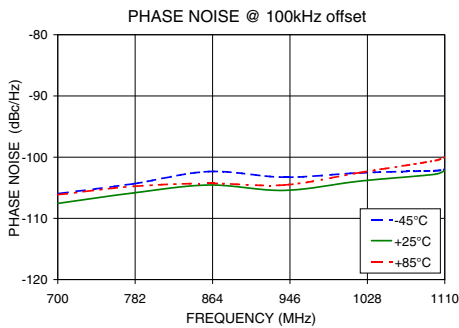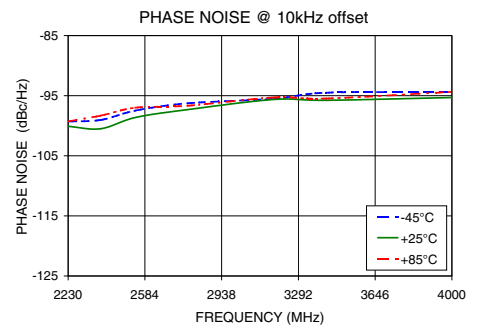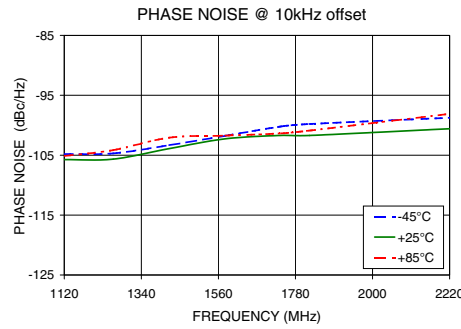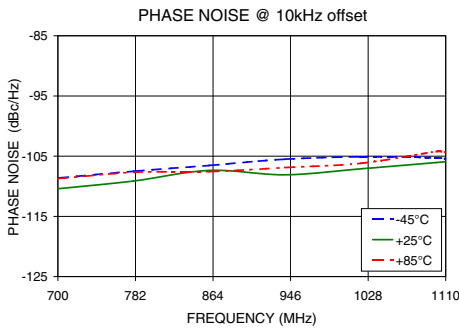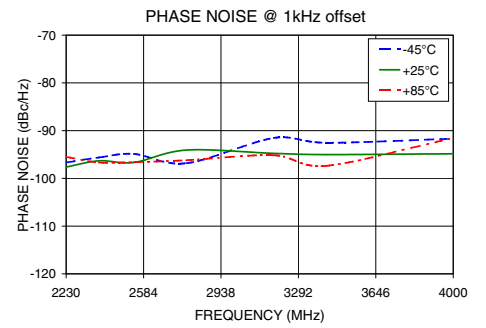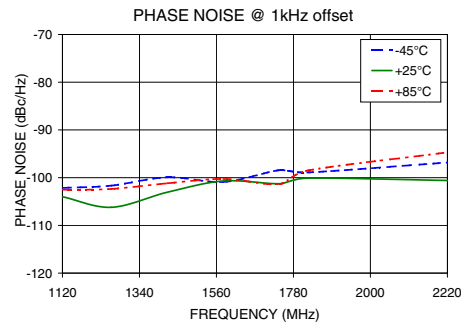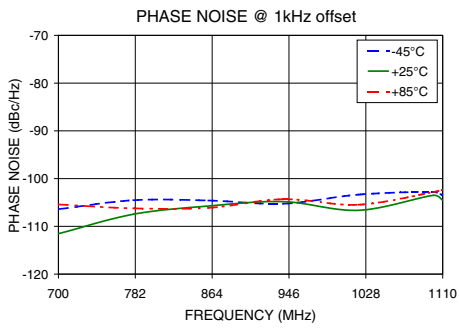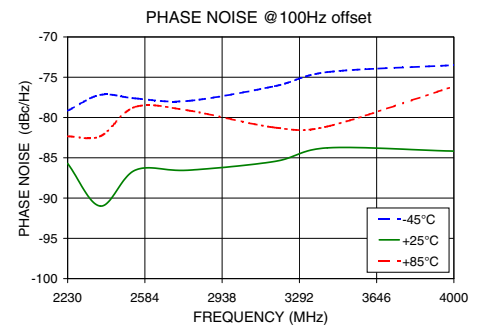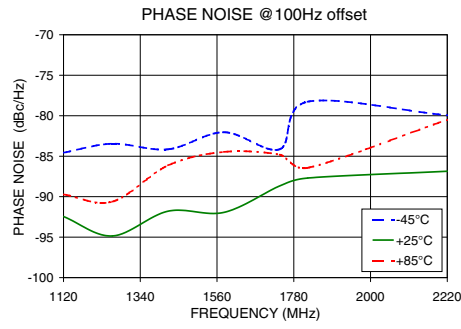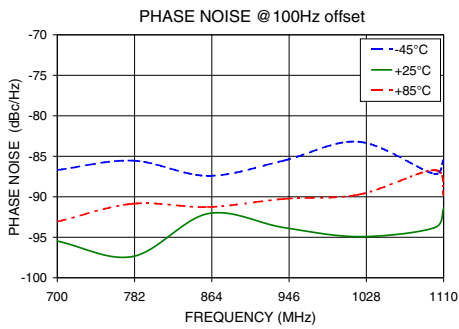










IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

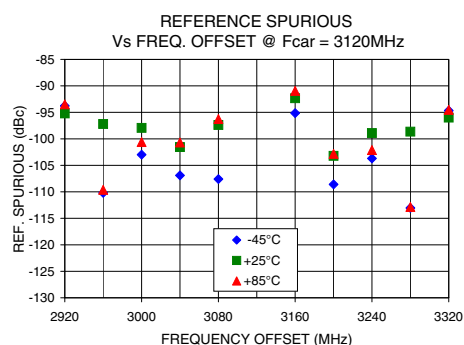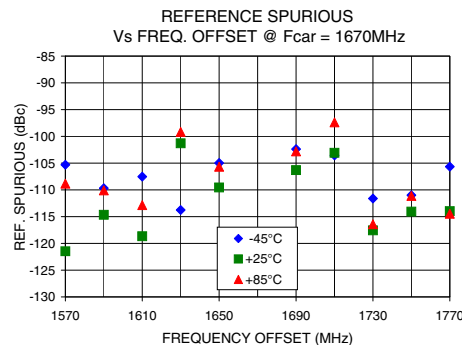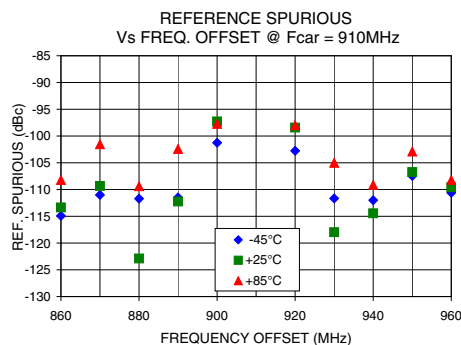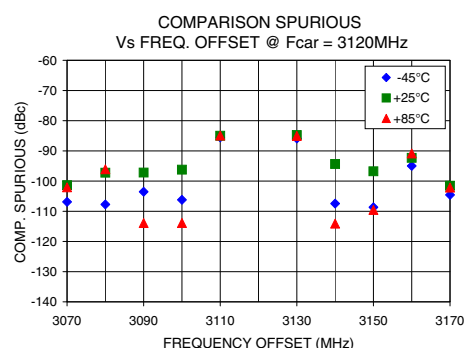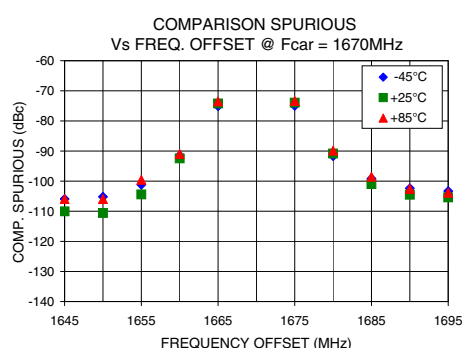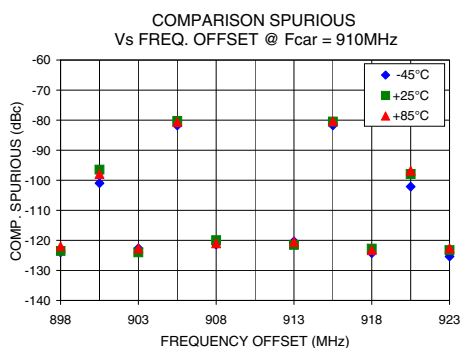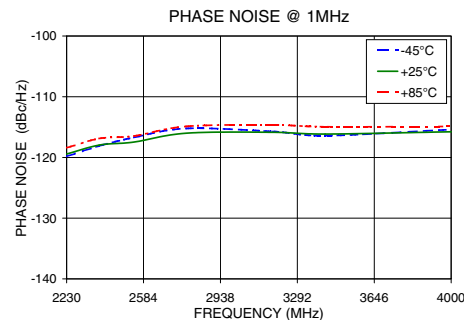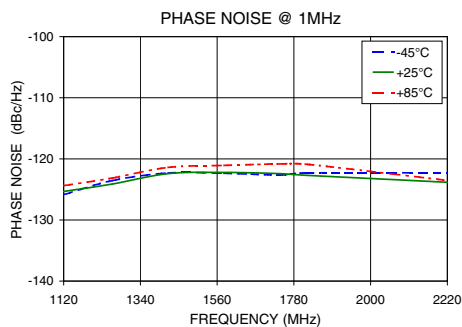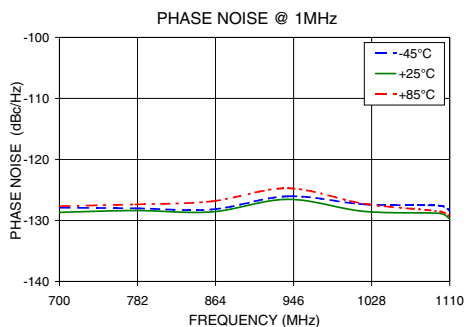

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Pin Configuration

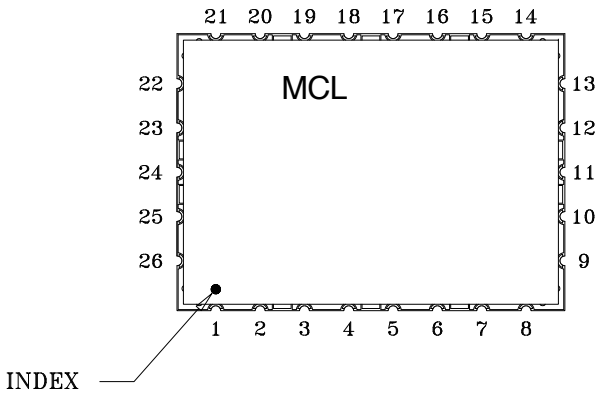


Pin Connection

Pin Number	Function	Pin Number	Function	Pin Number	Function
1	GND	10	VCC VCO	19	GND
2	CLOCK	11	GND	20	GND
3	DATA	12	GND	21	GND
4	LE	13	RF OUT	22	GND
5	LOCK DET	14	GND	23	GND
6	VCC PLL	15	GND	24	GND
7	CTRL.B	16	GND	25	REF IN
8	CTRL.A	17	GND	26	GND
9	GND	18	GND		

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

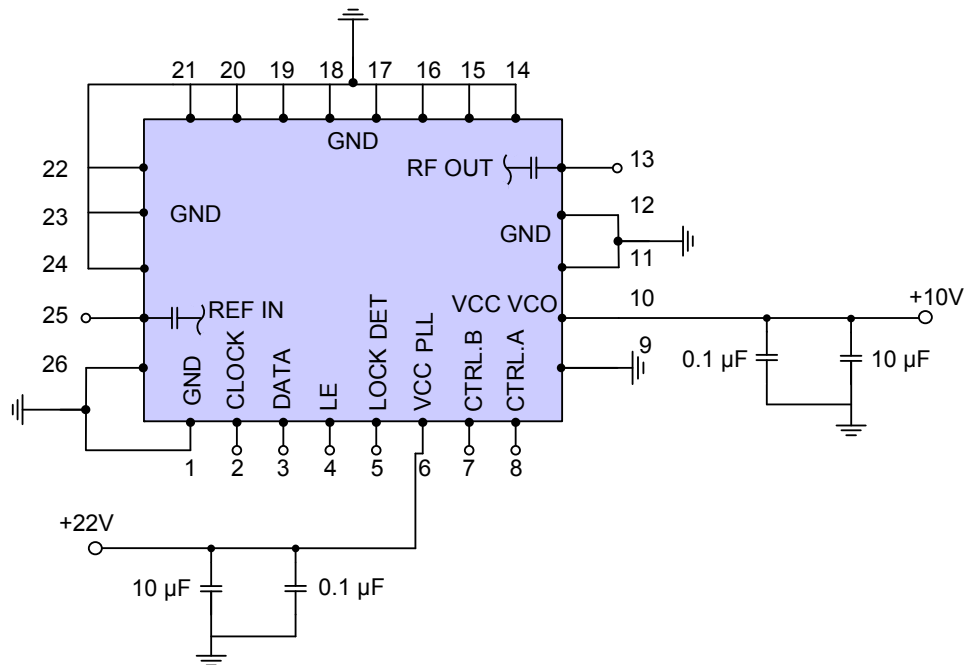

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
 P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Device Marking

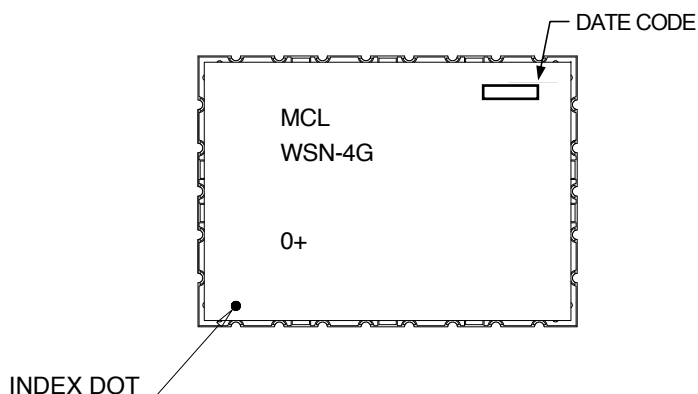

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: KN1368

Tape & Reel: TR-F96

Suggested Layout for PCB Design: PL-326

Evaluation Board: TB-572+

Environment Ratings: ENV03T2

Mini-Circuits®

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.