


High Power Broadband Noise Sources CNS7106-D1C 200 kHz to 12 MHz

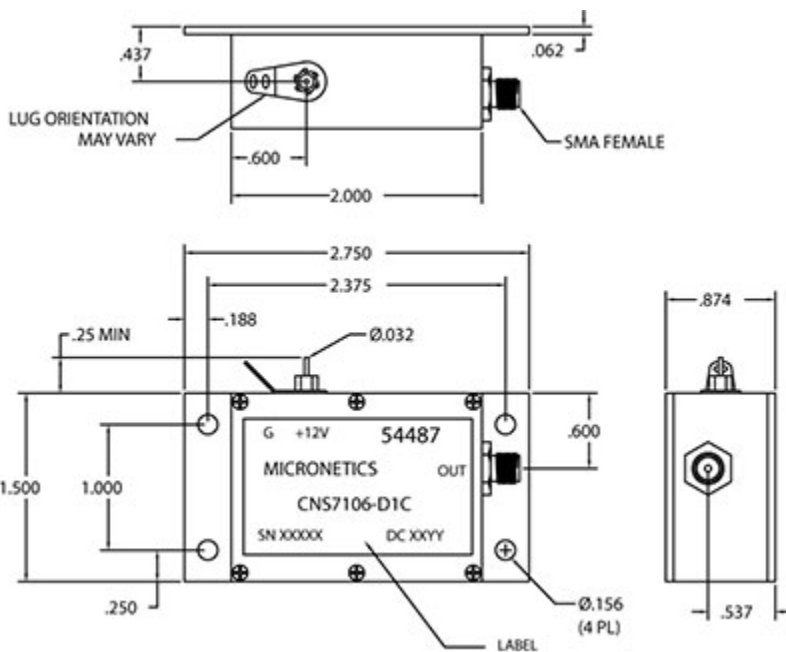

Specifications

RF Frequency	200 kHz to 12 MHz
Noise Output	79 dB Min ENR
Noise Spectral Density (N_0)	-79 dBm/Hz Min
Noise Power (N)	-8.8 dBm
Flatness	1 dB P-P Max
Peak Factor	5:1
Bias Voltage	12 V
Supply Current	35 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	Coaxial
Connector Type	SMA(f)

Environmental

Operating Temperature	-55 to 85 °C
Storage Temperature	-55 to 125 °C

Notes

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

