
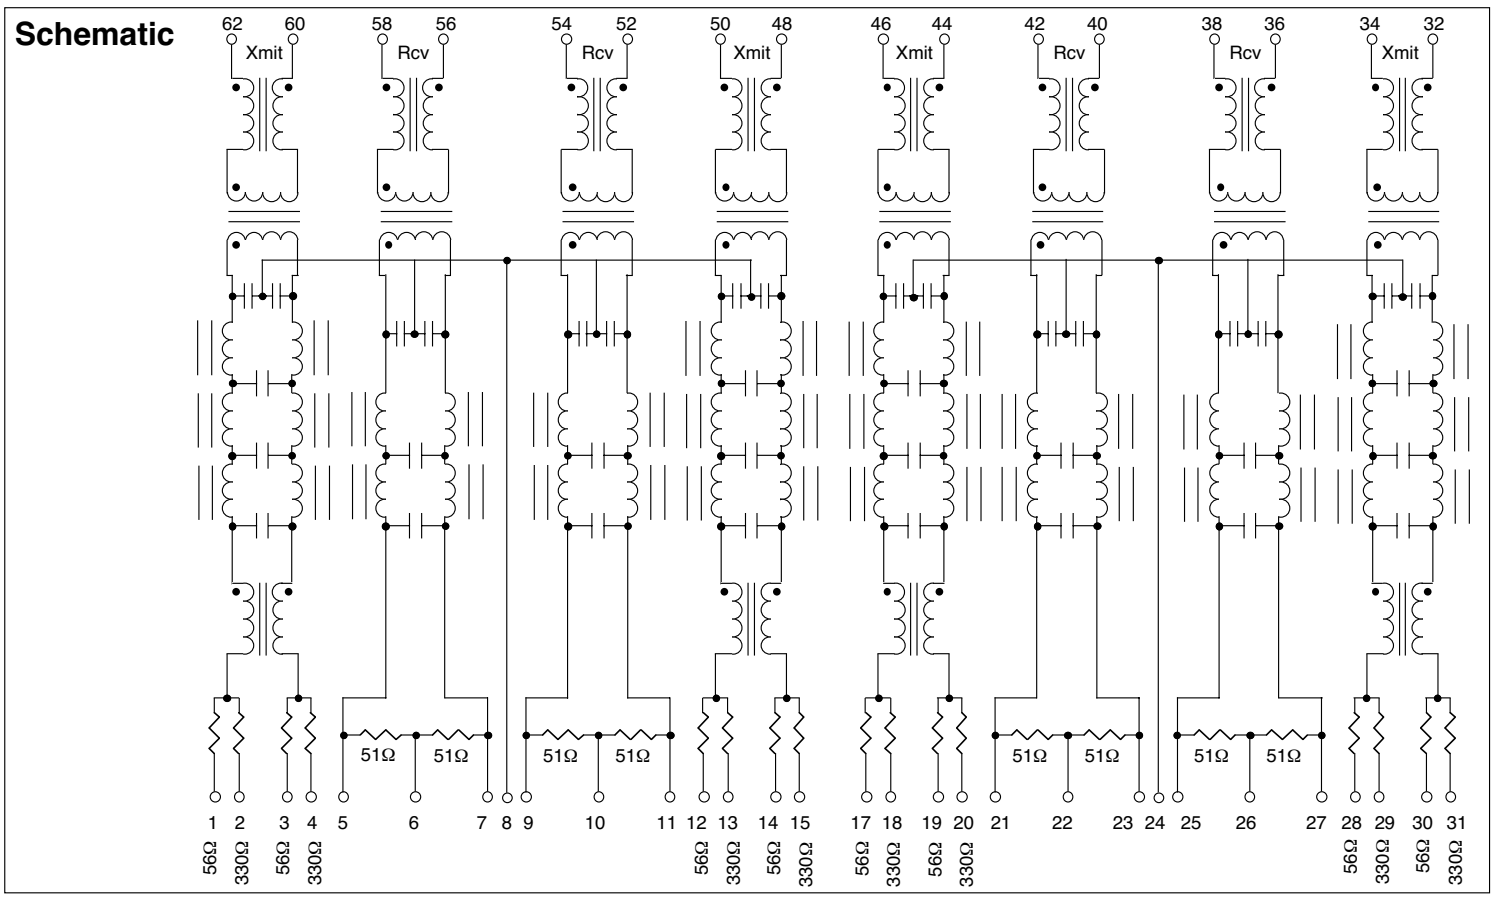


Filter, Transformer and Common Mode Choke for 10 Base-T (Twisted Pair) 62 Pins

Electrical Specifications @ 25°C			
Dielectric Withstanding Voltage : 2000 Vrms			
Insertion Loss (1-10 MHz) : See Below			
Crosstalk (1-10 MHz) : -30 dB Min.			
Group Delay Change (1-10 MHz) : 2.0 nS Max.			
Cut-off Frequency : 17.5 MHz ± 1.0 MHz			
INSERTION ¹ LOSS (dB Max.)		XMIT 8 RCV 1	PCA Part Number EPE6002
ATTENUATION ² (-dB Min.)			
		20 MHz	
		XMIT 7.0 RCV 6.0	
		25 MHz	
		XMIT 19.0 RCV 14.0	
		30 MHz	
		XMIT 32.0 RCV 20.0	
		40 MHz	
		XMIT 35.0 RCV 31.0	
Notes : 1. Measured at Fundamental Frequency (10.0 MHz)			
2. Referenced to the Output Level Fundamental Frequency			

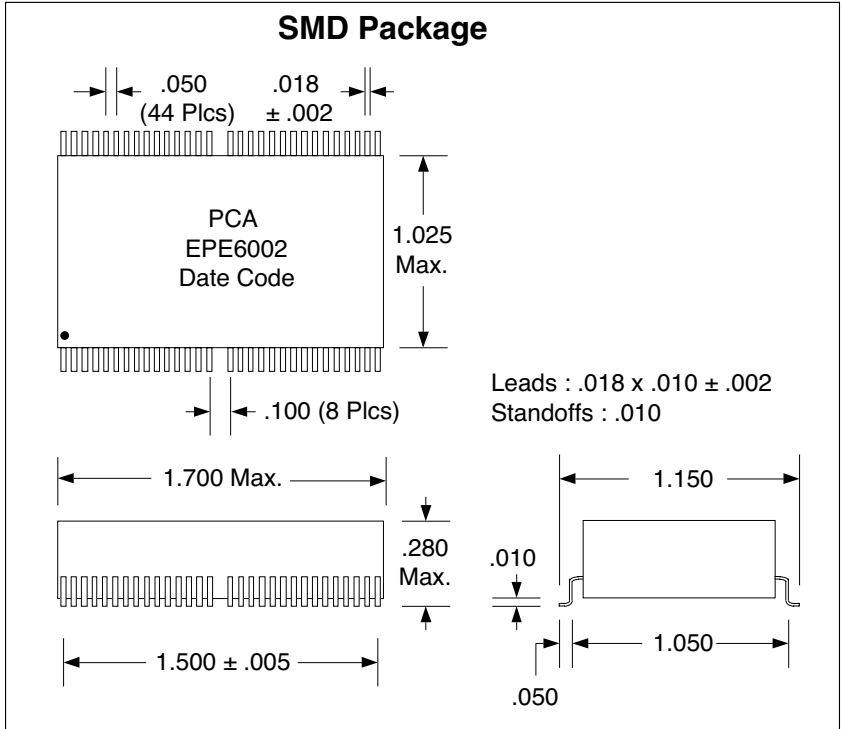

Unless Otherwise Noted Dimensions in Inches

Tolerances:
 Fractional = ± 1/32
 .XX = ± .030 .XXX = ± .010

16799 SCHOENBORN ST.
 NORTH HILLS, CA 91343
 TEL: (818) 892-0761
 FAX: (818) 894-5791