



CONNOR-WINFIELD CORPORATION

AURORA, IL. 60505



PHONE (630) 851-4722

FAX (630) 851-5040

14 PIN DIP ADVANCED CMOS

SPECIFICATIONS			AC61	AC62	AC63	AC64
Frequency Range			10MHz to 150MHz			
Frequency Stability			±25ppm	±50ppm	±100ppm	±20ppm
			(Inclusive of calibration tolerance at 25°C and operating temperature range)			
Temperature Range			−40°C to +85°C			
Output	Waveform		CMOS Squarewave , TTL Compatible			
	Load		50pF			
	Voltage	Voh	4.4V Minimum			
		Vol	0.44V Maximum			
	Current	Ioh	−24mA			
		Iol	24mA Maximum			
	Duty Cycle		45/55 Maximum			
	Rise/Fall Time		1ns Maximum (measured from .5 to 2.4V)			
Start Up Time			10mS Maximum			
Supply Voltage			+5Vdc ±5%			
Supply Current			100mA Maximum			
Package			All metal, hermatically sealed, welded package			

WARNING! Do not insert oscillator into a hot circuit. Failure to comply will result in damage to oscillator.

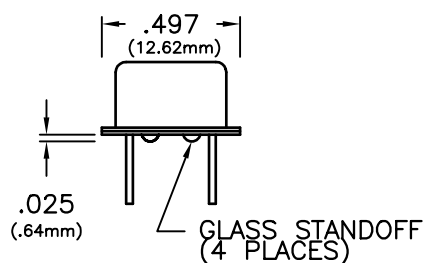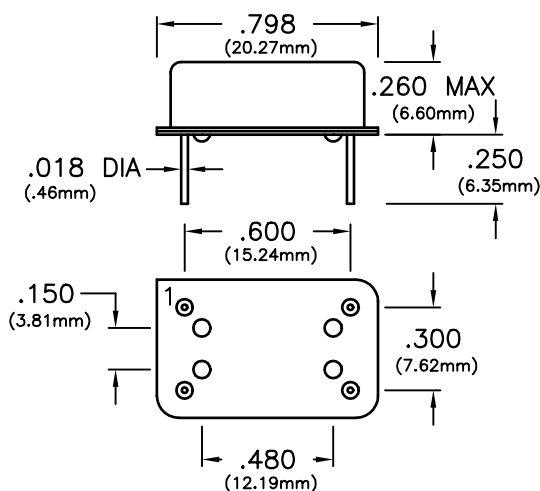

PIN	CONNECTION
1	N/C
7	GROUND (CASE)
8	OUTPUT
14	(+) SUPPLY

Dimensional Tolerance ±.005

Specifications subject to change without notice

BULLETIN #: AC064
PAGE 1 OF 1

REV: 01
DATE: 12/16/96

ISSUED BY: _____