

SPST RF Switch

RF2 Terminated in "OFF" State

Model TWD2215

5 to 3000 MHz

Features



- 5 - 3000 MHz
- RF2 Terminated in 'OFF' State
- Integral TTL Driver
- Operating Temp. - 55 °C to + 85 °C
- Environmental Screening available

Specifications

CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = - 55 °C to +85 °C
Frequency	5 - 3000 MHz	5 - 3000 MHz
Insertion Loss (dB)		
5 - 1000 MHz	0.8	1.2 Max.
5 - 2000 MHz	1.2	1.5 Max.
5 - 3000 MHz	1.8	2.2 Max.
Isolation (dB)		
5 - 1000 MHz	50	46 Min.
5 - 2000 MHz	36	34 Min.
5 - 3000 MHz	31	29 Min.
VSWR "ON"/"OFF"		
5 - 1000 MHz	1.25:1	1.4:1 Max.
5 - 2000 MHz	1.5:1	1.6:1 Max.
5 - 3000 MHz	1.5:1	1.7:1 Max.
1 dB Compression (dBm)		
50 MHz	+18.5	+18.0 Min.
500 - 3000 MHz	+24	+22.0 Min.
Switching Speed (nsec) (50% TTL to 90% RF)	15	30 Max.
DC Bias (mA) (4.5 to 5.5 VDC)	0.025	1.0 Max.

Note: Care should always be taken to effectively ground the case of each unit

Typical Performance Data

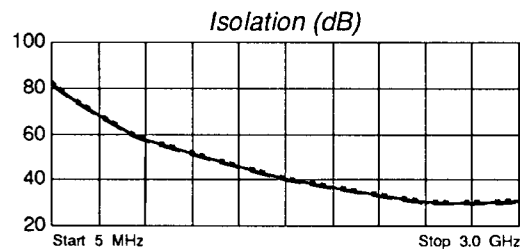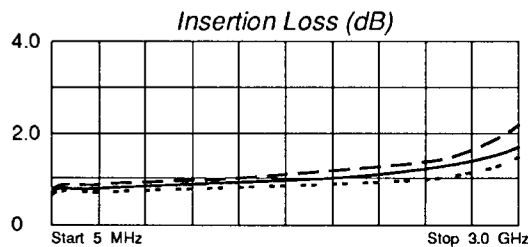


Maximum Ratings

Ambient Operating Temperature - 55 °C to + 100 °C
 Storage Temperature - 65 °C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 6.0 Volts
 Continuous RF Input Power +30 dBm

Packaging Options (see Appendix)



14 Pin DIP (DP3)

Pin Layout

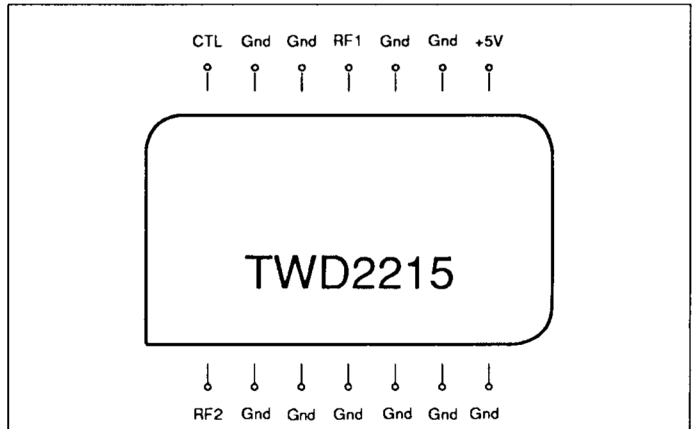

Truth Table

Control Input	Switch Position
TTL	RF1 To RF2
0	"OFF"
1	"ON"

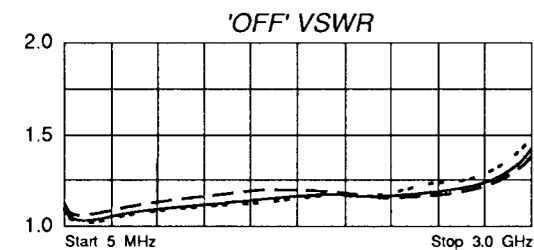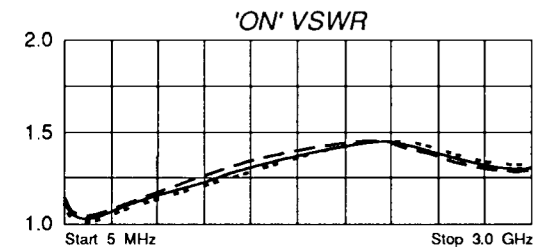

Legend ——— + 25 °C - - - - + 85 °C - 55 °C



SPECTRUM MICROWAVE • 2144 Franklin Drive N.E. • Palm Bay, Florida 32905 • Phone: (888) 553-7531 • Fax: (888) 553-7532
 SPECTRUM CONTROL GmbH • Hansastrasse 6 • 91126 Schwabach, Germany • Phone: (49)-9122-795-0 • Fax: (49)-9122-795-58