



HIGH TEMPERATURE OSCILLATORS

High Temperature/High Shock

DESCRIPTION

An increasing number of applications require the use of high-temperature oscillators. For these applications, Statek offers the CXOHT, CXOMHT, and CXOXHT oscillators. These oscillators are designed to operate at temperatures up to 200°C with a total frequency stability of 200 parts-per-million at this temperature. The CXOHT is offered in a 10.16 mm x 4.57 mm package. The CXOMHT oscillator is offered in a 6.50 mm x 5.00 mm package. The CXOXHT oscillator features the smallest size of the three, and is offered in a 3.20 mm x 2.50 mm package.

FEATURES


- High temperature operation up to 200°C
- Excellent stability over temperature
- Fast start-up
- High shock resistance
- CMOS and TTL compatible
- Optional output enable/disable
- Low EMI emission
- Hermetically sealed ceramic package

APPLICATIONS


Industrial

- Downhole instrumentation
- Rotary shaft sensors
- Underground boring tools

PACKAGE DIMENSIONS

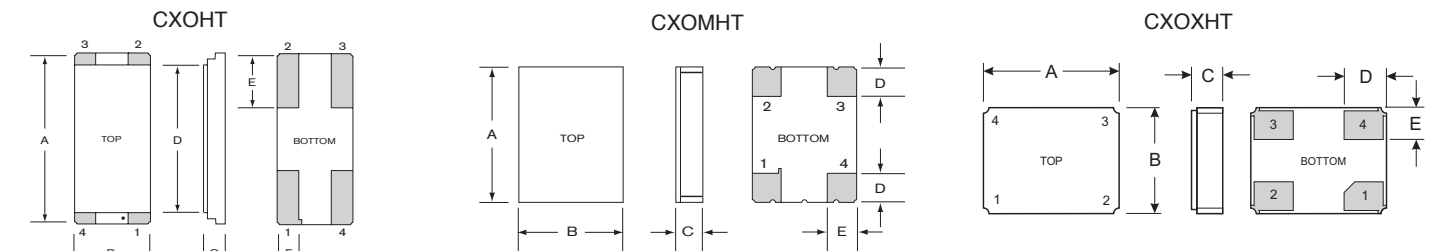


SUGGESTED LAND PATTERN

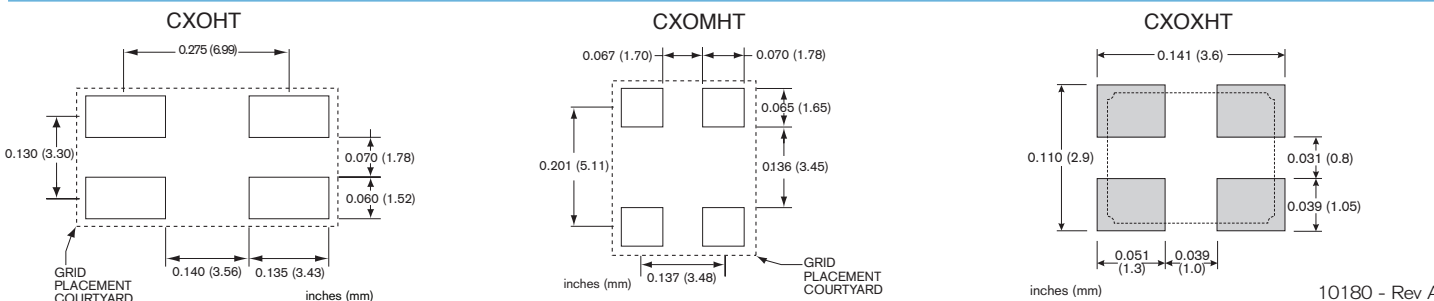

CXOHT

300 kHz - 50 MHz



Actual Size




Top View



Side View

CXOMHT

300 kHz - 50 MHz



Actual Size




Top View



Side View

CXOXHT

1 MHz - 50 MHz



Actual Size



Top View



Side View

PIN CONNECTIONS

1. Enable/Disable (E) or No Connection (N)
2. Ground
3. Output
4. V_{DD}

DIMENSIONS

DIM	CXOHT MAXIMUM		CXOMHT MAXIMUM		CXOXHT MAXIMUM	
	inches	mm	inches	mm	inches	mm
A	0.405	10.29	0.263	6.68	0.136	3.40
B	0.190	4.83	0.204	5.18	0.107	2.70
C (SM1)	0.055	1.40	0.055	1.40	0.043	1.09
C (SM3/SM5)	0.063	1.60	0.063	1.60	0.048	1.21
D	0.350	8.89	0.065	1.65	0.041	1.10
E	0.135	3.43	0.070	1.78	0.031	0.85
F	0.060	1.52	—	—	—	—



SPECIFICATIONS

Specifications are typical at 25°C unless otherwise noted. Specifications are subject to change without notice. Tighter specifications available. Please contact factory.

Supply Voltage ¹	3.3 V ± 10%	
	5.0 V ± 10%	
Calibration Tolerance	± 50 ppm, or tighter as required	
Frequency Stability	± 100 ppm for 25°C to 150°C	
Over Temperature	± 150 ppm for 25°C to 175°C ± 175 ppm for 25°C to 200°C	
Total Tolerance ²	± 200 ppm for 25°C to 200°C	
Supply Current (Typical)	<u>3.3 V</u>	<u>5.0 V</u>
	24 MHz	3.0 mA 8.0 mA
	32 MHz	5.0 mA 10.0 mA
	50 MHz	6.0 mA 14.0 mA
	120 MHz	23.0 mA 39.0 mA
Output Load (CMOS)	15 pF	
Start-up Time	5 ms MAX	
Rise/Fall Time	6 ns MAX	
Duty Cycle	40% MIN, 60% MAX	
Aging, first year	10 ppm MAX at 25°C	
Aging, 1,000 Hrs	100 ppm MAX at 200°C	
Shock, survival ³	Std: 3,000 g, 0.3 ms, 1/2 sine HG: 10,000 g, 0.3 ms, 1/2 sine	
Vibration, survival ⁴	20 g, 10-2,000 Hz swept sine	
Operating Temp Range	-55°C up to 200°C	

1. All frequencies, voltages, temperature ranges and enable/disable options may not be available. Contact factory.

2. Total Tolerance = Calibration Tolerance + Frequency Stability over temperature.

3. For non-high-shock CXOHT and CXOMHT oscillators only. The specification for CXOXHT oscillators is 5,000 g, 0.3 ms, 1/2 sine.

4. Per MIL-STD-202G, Method 204D, Condition D. Random vibration testing available.

Note: All parameters are measured at ambient temperature with a 10 MΩ, 15 pF load.


PACKAGING OPTIONS

CXOHT, CXOMHT, CXOXHT - Tray Pack

- 16 mm tape, 7" or 13" reels

Per EIA 481 (see Tape and Reel data sheet # 10109)

HOW TO ORDER CXOHT, CXOMHT and CXOXHT OSCILLATORS

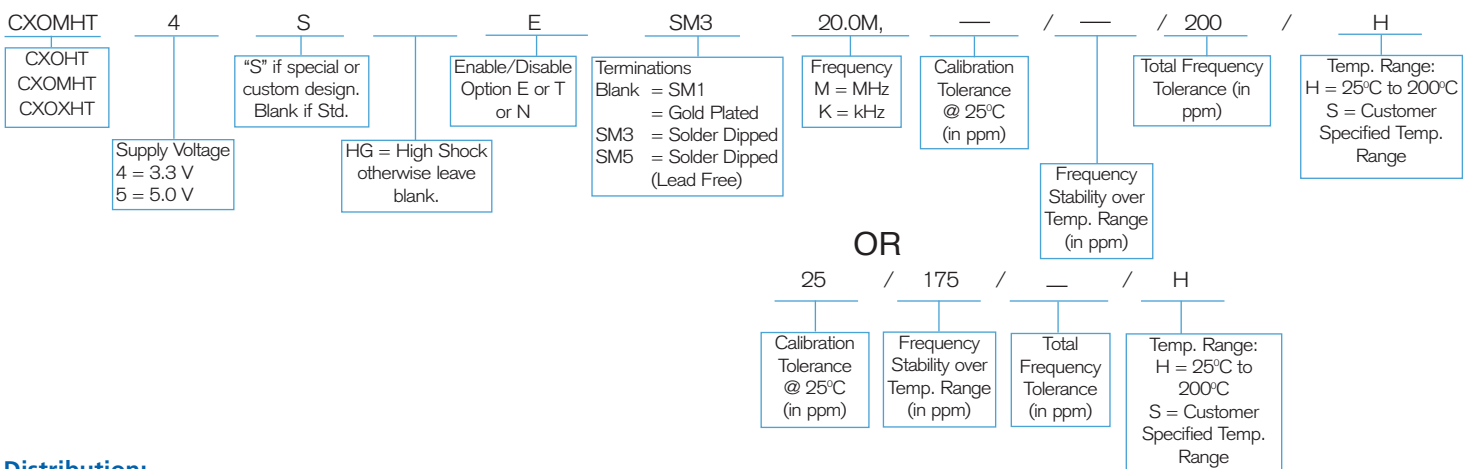

Distribution:

RSG Electronic Components GmbH ■ Sprendlinger Landstr. 115 ■ D-63069 Offenbach/Germany
Tel. +49 69 984047-0 ■ Fax +49 69 984047-77 ■ info@rsg-electronic.de ■ www.rsg-electronic.de
Änderungen vorbehalten / subject to change without notice

ABSOLUTE MAXIMUM RATINGS

Supply Voltage V_{DD}	-0.3 V to 7.0 V
Storage Temperature	-55°C to 125°C
Maximum Process Temperature	260°C, 20 seconds

ENABLE/DISABLE OPTIONS (E/T/N)

Statek offers three enable/disable options: E, T, and N. Both the E-version and T-version have Tri-State outputs and differ in whether the oscillator continues to run internally when the output is put into the high Z state: it stops in the E-version and continues to run in the T-version. So, the E-version offers very low current consumption when the oscillator is disabled and the T-version offers very fast output recovery when the oscillator is re-enabled. The N-version does not have PIN 1 connected internally and so has no enable/disable capability. The following table summarizes the three options.

COMPARISON OF ENABLE/DISABLE OPTIONS E AND T

	E	T
<i>When enabled (PIN 1 is high*)</i>		
Output	Freq. output	Freq. output
Oscillator	Oscillates	Oscillates
Current consumption	Normal	Normal
<i>When disabled (PIN 1 is low)</i>		
Output	High Z state	High Z state
Oscillator	Stops	Oscillates
Current consumption	Very low	Lower than normal
<i>When re-enabled (PIN 1 changes from low to high)</i>		
Output recovery	Delayed	Immediate

*When PIN 1 is allowed to float, it is held high by an internal pull-up resistor.

