

Photonic Multichannel Spectral Analyzer Model: PMA-11




The PMA-11 is a spectral analyzer that integrates a spectrograph and high performance multi-channel photodetector in a single compact chassis. Light collection is simplified through the use of optical fiber. The diffraction grating of the spectrograph and multi-channel photodetector are rigidly fixed, resulting in excellent wavelength reproducibility. The wavelength axis and spectral response characteristics are calibrated at the factory, so that spectral measurements can be carried out easily and accurately.

The PMA-11 series offers four different multi-channel photo-detectors to choose from, for additional flexibility in grating selection, allowing the user to optimize the performance for the application at hand.

Equipped with a standard SCSI interface, the PMA-11 is easily connected to any type of computer for data collection and analysis.

- **Compact Integration of a Spectrograph and Multi-channel Photodetector**
- **High Sensitivity**
- **Easy Measurement Using Optical Fiber Input**

HAMAMATSU

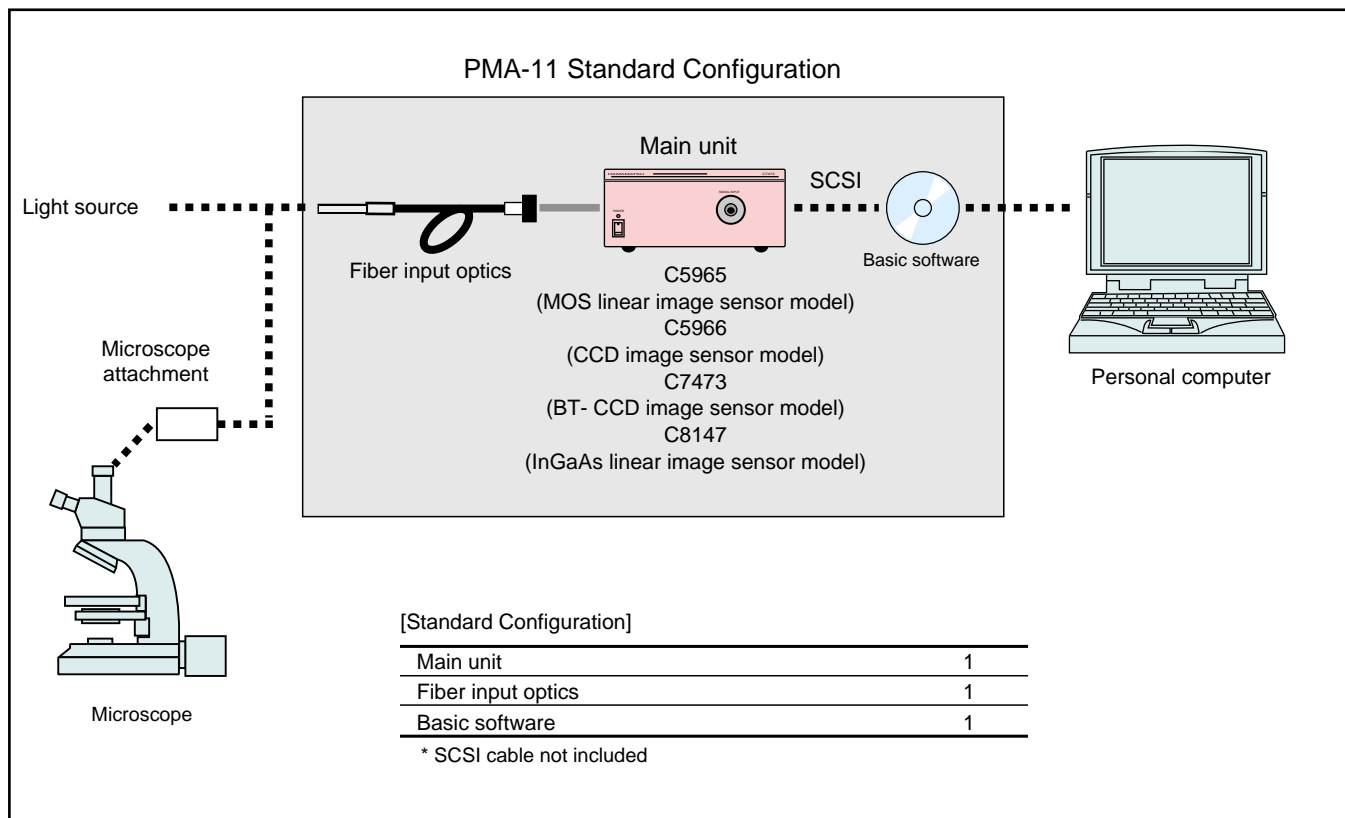

**A compact unit containing a multi-channel photo-detector, and power supply all in one.
Optical fiber input makes spectral measurements easier than ever.**

FEATURES

- **Measurements of the spectrum are easier and more accurate than ever before**

The spectrum can now be easily measured by light collection through an optical fiber. The wavelength axis and spectral response characteristics are calibrated at the factory, so that spectral measurements can be carried out easily and accurately.

- **Superb cost performance model : C5965**

The C5965 uses a MOS linear image sensor realises high performance and low cost.

- **High sensitivity model : C5966**

The C5966 uses the CCD linear image sensor has sensitivity a hundred times better than the C5965 model.

- **Ultra-high sensitivity model : C7473-36**

The C7473-36 consists the thermoelectric-cooling type BT-CCD image sensors, which have a high quantum efficiency and a compact Czerny-Turner type spectrograph. The simultaneous measurement of the wavelength from an ultraviolet to a near-infrared region with high wavelength resolution and high sensitivity is realised.

- **Near infrared model : C8147-34, C8147-38**

The C8147 realises a simultaneous and high-resolution measurement of absorption or reflection spectra in a near infrared wavelength region with a wide dynamic range and a low noise.

- **High efficiency optics**

Adoption of a $\varnothing 1\text{mm}$ bundle fiber and a bright spectrograph detects a measured light efficiently.

- **Compact design**

High performance is built in a small case. This completely new design ensures that the PMA-11 will fit anywhere.

- **External synchronisation can be used**

Measurements can now be carried out synchronised to external trigger signals, allowing measurement of pulse phenomena.

- **Standard SCSI interface allows connection to computer**

APPLICATIONS


[Scientific applications]

- UV to visible spectroscopy
- Fluorescence spectroscopy
- Raman scattering
- Chemiluminescence analysis
- Liquid chromatography
- Gas chromatography
- ICP emission analysis
- Discharge emission analysis
- Combustion analysis
- Micro spectroscopy


[Industrial applications]

- Water quality testing
- Evaluation of light sources
- Chromaticity measurements
- Impurities testing
- Thin film thickness monitors
- UV-ray monitors
- Plasma monitors
- Fruit tester
- Plastic sorting
- Color filter testing


MEASUREMENT EXAMPLES

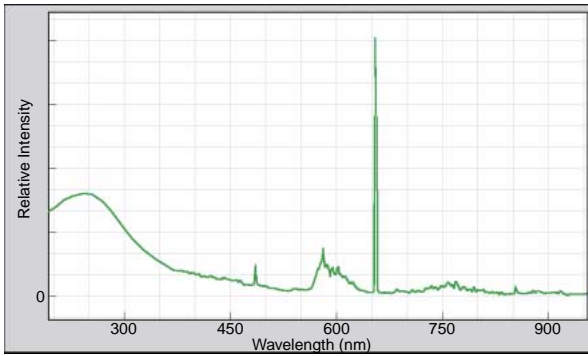


① Luminescence spectrum of a deuterium lamp

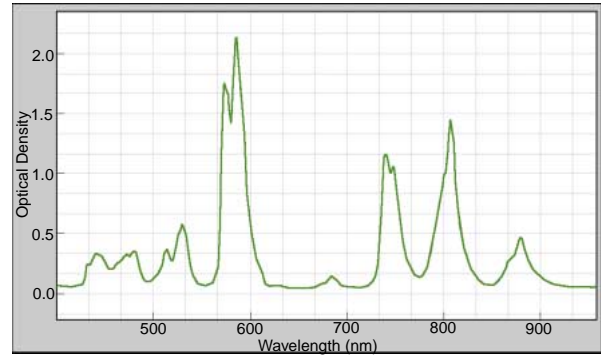


② Absorption spectrum of a didymium filter

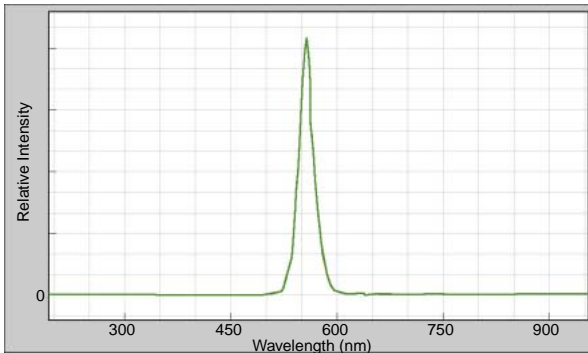


③ Luminescence spectrum of an LED

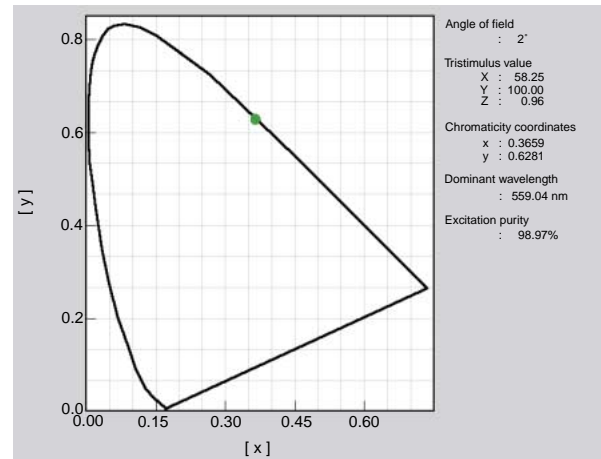


④ Chromaticity coordinates of an LED

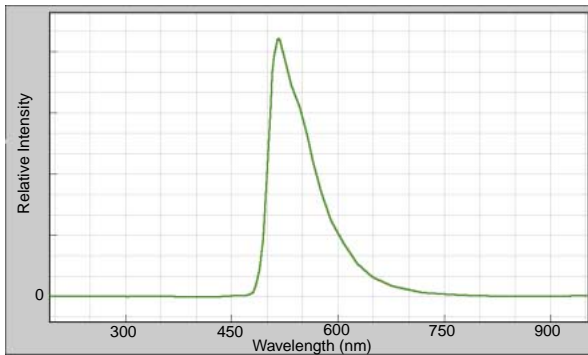


⑤ Fluorescence spectrum of fluorosein

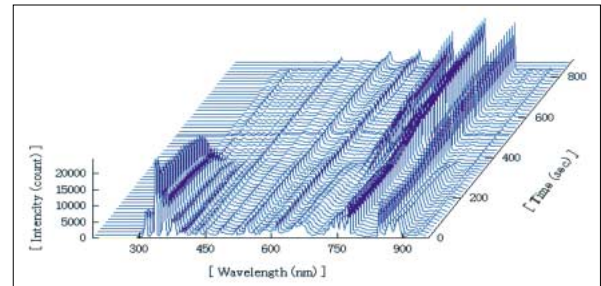

⑥ 3-d display of plasma emission spectra

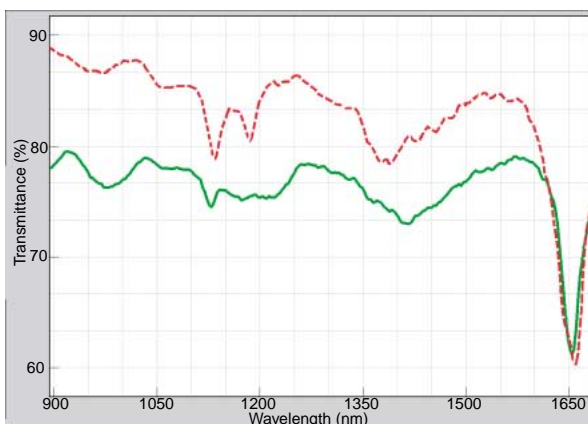

⑦ Transmittance spectra in near infrared reagon
Dotted line: Compact disc
Solid line: PET bottle

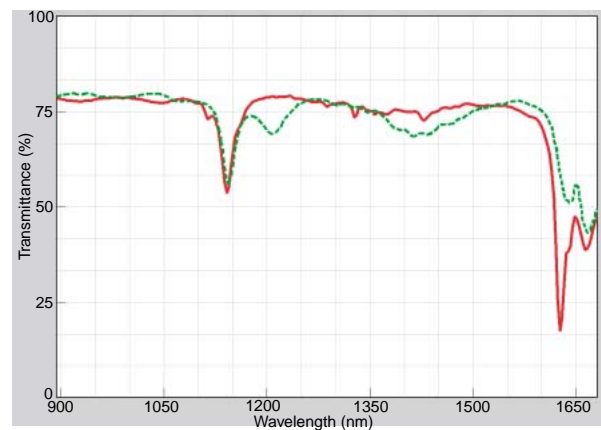

⑧ Transmittance spectra in near infrared reagon
Dotted line : Styrene monomer
Solid line : Polystyrene

SPECIFICATIONS

● Main unit

Type No.	C5965-31	C5966-3x	C7473-36	C8147-34	C8147-38
Photodetector	MOS linear image sensor	CCD linear image sensor	BT- CCD linear image sensor	InGaAs linear image sensor	
No. of photosensitive device channels	1024 ch	1024 ch	1024 ch	256 ch	
Channel size	25 μm(H) × 2.5 mm (V)	24 μm (H) × 3.07 mm(V)	24 μm(H) × 2.928 mm(V)	50 μm(H) × 250 μm (V)	
Cooling temperature	non-cooling	0°C	-15°C	0°C	-10°C
Read-out noise	10 000 electrons	60 electrons	10 electrons	12,500 electrons	
Dark current	12,500 electrons/scan (at 25°C; 20ms)	512 electrons/scan(at 0°C; 20ms)	75 electrons/scan (at -15°C; 20ms)	20,000 electrons/scan (at 0°C; 5ms)	2.5 × 10 ⁷ electrons/scan (at -10°C; 5ms)
A/D resolution	16bit				
Spectrograph F number	3			4	
Spectrograph type	Concave spherical grating type			Czerny-Turner type	
Simultaneous measurement wavelength range	300 nm to 800nm	x=1 300 nm to 800 nm x=2 200 nm to 400 nm x=3 600 nm to 1000nm	200 nm to 950 nm	900 nm to 1650 nm	1600 nm to 2350 nm
Wavelength resolution *	< 3 nm(FWHM)	x=1 < 3 nm(FWHM) x=2 < 1.5 nm(FWHM) x=3 < 2.5 nm(FWHM)	< 2 nm(FWHM)	< 9 nm(FWHM)	< 9 nm(FWHM)
Effective Light-receiving area of optical fiber	φ 1mm				
Optical fiber length	1.5m				
Exposure time	20ms to 32s			5 ms to 32 s	5 ms to 50 ms (typ.)
External trigger input	TTL level / High impedance				
Interface	SCSI				
Line voltage	AC100V to 240V ±10%, 50, 60Hz				


* Tested by the bright-line spectrum of Hg-Ar lamp (at 312.57nm, 435.84nm, 546.07nm, 696.54nm, 1013.98nm)

● Basic software


Measurement functions	<ul style="list-style-type: none"> • Spectral measurement • Reflection spectra measurement • Absorption spectra measurement • Color measurement
Temporal resolution measurement functions	<ul style="list-style-type: none"> • Temporal fluctuation of spectra over time • Temporal fluctuation of reflection factor and transmittance over time
Data acquisition condition setting	<ul style="list-style-type: none"> • Exposure time • Memory integration count times • Temporal fluctuation measurement
Calibration and correction	<ul style="list-style-type: none"> • Wavelength axis • Sensitivity uniformity • Dark current
Display functions	<ul style="list-style-type: none"> • Spectrum (non-limited accumulation) • Temporal fluctuation of waveform over time (non-limited accumulation) • Chromaticity diagram
Wavelength axis display	<ul style="list-style-type: none"> • Wavelength (nm), Wavenumber (cm⁻¹), Energy (eV)
Brightness axis display	<ul style="list-style-type: none"> • Linear, logarithm
Cursor analysis functions	<ul style="list-style-type: none"> • Wavelength (Wavenumber etc.) vs, intensity • Peak detection • FWHM between two cursors • Integrated intensity
Other analytical functions	<ul style="list-style-type: none"> • Smoothing • Differential waveform • Color measurement

DIMENSIONAL OUTLINES (Unit :mm)


● C5965, C5966 (approx. 4.5kg)

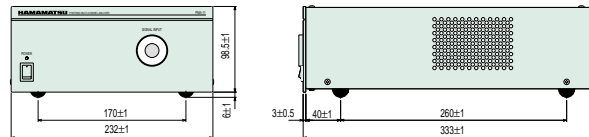


● C7473 (approx. 5kg)

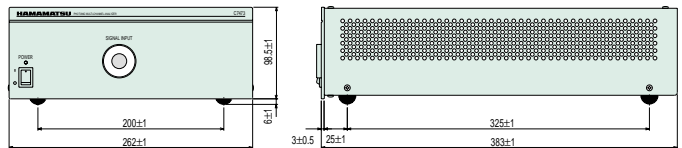

● C8147 (approx. 7.5kg)

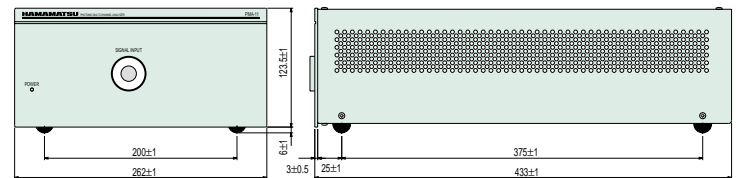

● Fiber input optics (approx. 100g)

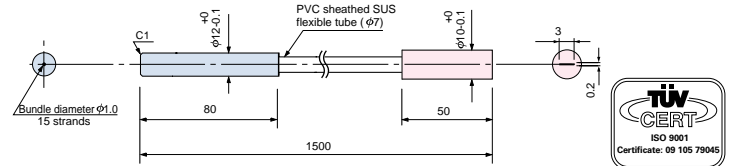

★ Product and software package names noted in this documentation are trademarks or registered trademarks of their respective manufacturers.

- Subject to local technical requirements and regulations, availability of products included in this promotional material may vary. Please consult with our sales office.
- Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications and external appearance are subject to change without notice.

© 2001Hamamatsu Photonics K.K.

HAMAMATSU

Homepage Address <http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Systems Division

812 Joko-cho, Hamamatsu City, 431-3196, Japan, Telephone: (81)53-431-0124, Fax: (81)53-435-1574, E-mail: export@sys.hpk.co.jp

U.S.A. and Canada: Hamamatsu Photonic Systems: 360 Foothill Road, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-1116, Fax: (1)908-231-0852, E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10, E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Twin Road, Welwyn Garden City, Hertfordshire, AL7 1BW, U.K., Telephone: (44) 1707-294888, Fax: (44) 1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Smidsvägen 12, SE-171-41 Solna, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E 20020 Arese (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741, E-mail: info@hamamatsu.it

Cat. No. SSCS1040E07
JUL /2002 HPK
Created in Japan (PDF)