


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

1965-15-9

REVISIONS	
ISSUE	CHANGES
0	ER 23332 JEP 13 MAY 82
1	CN 27187 E RJ 14 JUN 85
2	CN 34635 C KH 17 MAY 93

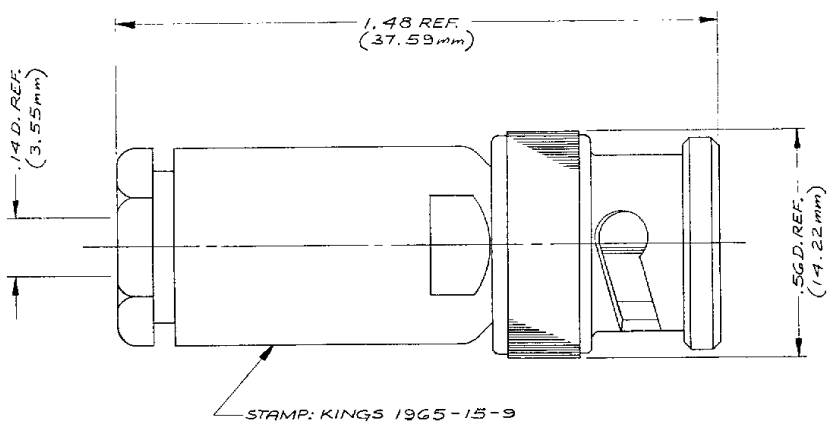

- NOTES:
- FOR USE WITH HUGHES HS-4885-1 CABLE.
 - FOR CABLING INSTRUCTIONS SEE C-59-316-1.
 - MATERIALS:
 - OUTER CONTACT } BERYLLIUM COPPER, QQ-C-530
 - SPRING WASHER } BERYLLIUM COPPER, QQ-C-530
 - HALF WASHER - BRASS, QQ-B-G13
 - ALL OTHER METAL PARTS - BRASS, QQ-B-G2G
 - INSULATORS - TEFLON, L-P-403
 - GASKETS - SILICONE RUBBER, ZZ-R-7G5
 - FINISHES:
 - CENTER CONTACT } HARD GOLD PLATE PER MIL-G-4520
 - OUTER CONTACT } HARD GOLD PLATE PER MIL-G-4520
 - ALL OTHER METAL PARTS - KINGS TARNISH RESISTANT FINISH (TR-5)
 - ELECTRICAL CHARACTERISTICS:
 - WORKING VOLTAGE - 400 VOLTS RMS.

GSD

SCALE: 4:1	
APPROX. SURFACE AREA:	
WAS E-11187	
USED ON:	
REF: HUGHES HELICOPTER HS 4885-105 REV D.	
BNC TRIAX PLUG	
DRAWN SD	DATE 4 MAR 85
APPR MJB	DATE 8 MAR 85
APPR -	DATE -
KINGS ELECTRONICS CO., INC. <small>ROCKAWAY, NEW YORK 10867</small>	
1965-15-9	

GSD

UNLESS OTHERWISE SPECIFIED: 1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010 3 PLACE DECIMALS ± .004 ANGLES ± 0°30' T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.	2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX. 3. NO FILLETS PERMITTED. 4. SURFACE ROUGHNESS 83 MICROINCHES RMS MAX. 5. ALL DIMENSIONS PRIOR TO PLATING. 6. ALL PLATING IN ACCORDANCE WITH KER 10004.
--	---