

E-Series Coupler
6 – 600 MHz

EMDC-16-1
V4


Features

- Coupling 16 dB Typical
- Surface Mount
- Tape and reel packaging available

Description

M/A-COM's EMDC-16-1 is a broadband coupler in a low cost, surface mount package. It offers low loss, good isolation, good input/output matching and exceptional coupling repeatability. Ideally suited for high volume cellular and wireless applications. Parts are packaged in tape & reel.

SM - 22 Package

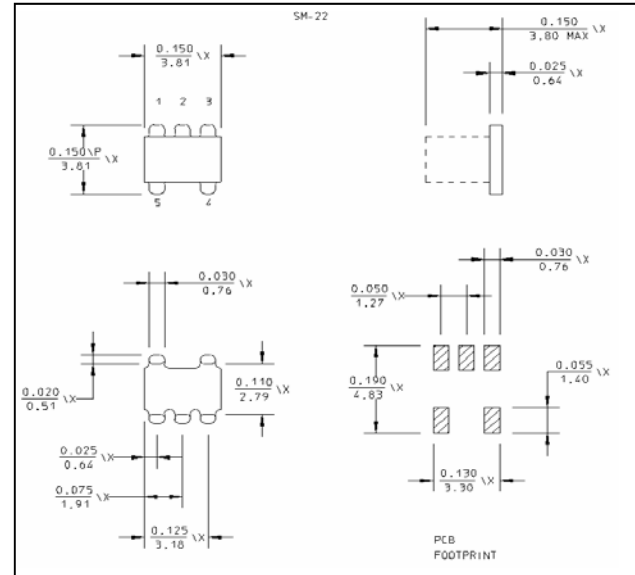

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	6 - 600	MHz	—	—	—
Coupling	$F_L - f_U$	6 - 600	dB	—	—	16 ±0.8
Main Line Loss	$F_L - f_U$	6 - 600	dB	—	0.6	0.9
Directivity	$F_L - f_U$	6 - 60	dB	20	30	—
		60 - 300	dB	20	27	—
		300 - 600	dB	10	21	—

Absolute Maximum Ratings¹

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1. Operation of this device above any one of these parameters may cause permanent damage.

Ordering Information

Part Number	Package
EMDC-16-1TR	Tape and Reel (2000 piece Reel)

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

Pin Configuration

Pin No.	Function
1	Coupled
2	Ground
3	Input
4	Output
5	External 50 Ohms