

TMX W405

SAW Bandpass Filter – US DVB-C
Preliminary Specification (Rev-1)

■ Technical overview	P01
■ Configuration	P01
■ Typical Response	P02
■ Package Drawing	P02

TMX W405

SAW Bandpass Filter – US DVB-C
Preliminary Specification (Rev-1)


March 2nd, 2005

Electrical Parameters	Unit	Minimum	Typical ⁽¹⁾	Maximum
Source Impedance (balance drive)	Ω	-	50 ⁽²⁾	-
Load Impedance (balance drive)	Ω	-	50 ⁽²⁾	-
Center Frequency f_0	MHz	-	1090	-
Relative Attenuation (relative to I_{Lmin})				
840 MHz to 1015 MHz	dB	36	42	-
1015 MHz to 1060 MHz	dB	44	50	-
1120 MHz to 1150 MHz	dB	22	27	-
1150 MHz to 1265 MHz	dB	35	40	-
1265 MHz to 1340 MHz	dB	42	50	-
Minimum Insertion Loss in 1084 MHz - 1096 MHz	dB	3.5	4.0	5.5
Amplitude Ripple in 1084 MHz - 1096 MHz	dB	-	1.0	3.0
Package type & size				
Length x Width	mm ²	-	3.8 x 3.8	-
Height	mm	-	1.3	1.5
Pin Out				
Input	1, 2	Output	5, 6	
Case Ground	4, 8	To Be Grounded	3, 7	

Notes :

- (1) Typical values are nominal performances at room temperature
- (2) No external matching circuit is required

50 Ω / 50 Ω Configuration

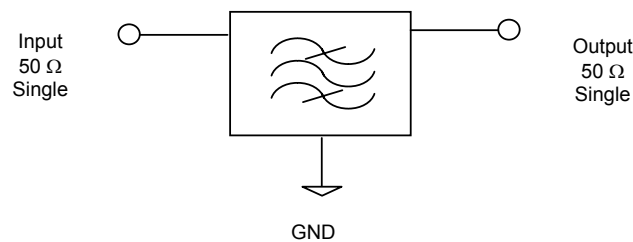

Maximum Ratings


Rating	Unit	Value
Operating Temperature Range T_A	-40 to +85	$^{\circ}C$
Storage Temperature Range	-40 to +85	$^{\circ}C$
Input Power Level	0	dBm
DC Voltage	0	V

TMX W405


SAW Bandpass Filter – US DVB-C
 Preliminary Specification (Rev-1)

March 2nd, 2005

TYPICAL S21 RESPONSE

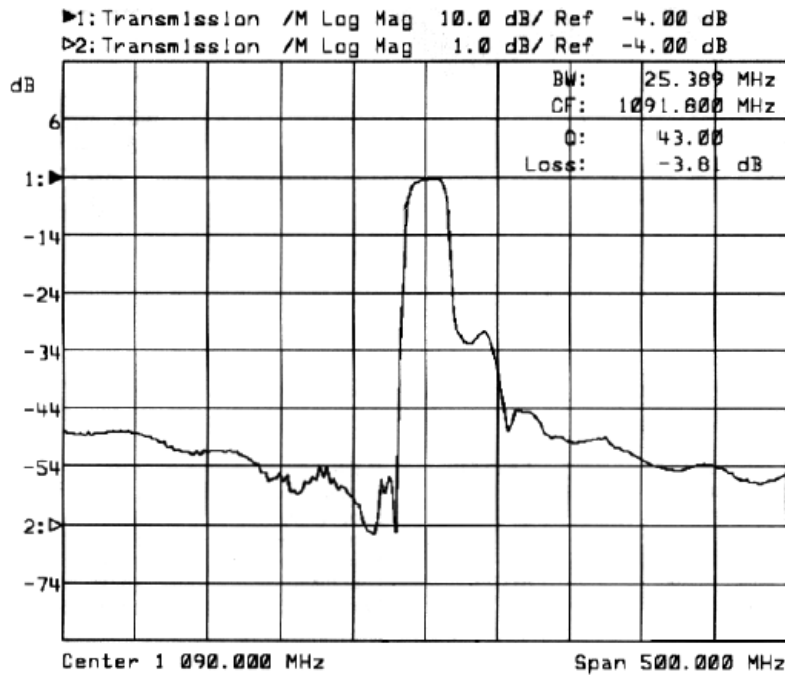

PACKAGE DRAWING

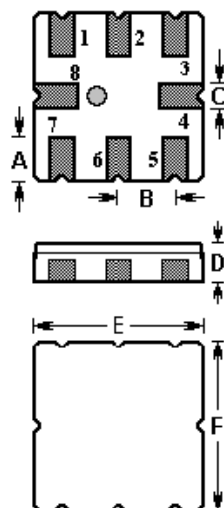

Sign	Data (unit: mm)	Sign	Data (unit: mm)
A	1.00	D	1.50
B	1.27	E	3.80
C	0.60	F	3.80