

E-Series I/Q Modulator
390 — 420 MHz

EKIN2-390X
V1


Features

- High Carrier Suppression
- High 3 I and 5 I Suppression
- LO Power + 10 dBm Typical
- Surface Mount
- Tape and reel packaging available

Description

M/A-COM's EKIN2-390X is a passive, high performance surface mount Modulator. It is ideally suited for Direct Modulation in Wireless Cellular Base Station applications. Parts are packaged in tape & reel.

SM - 59 Package

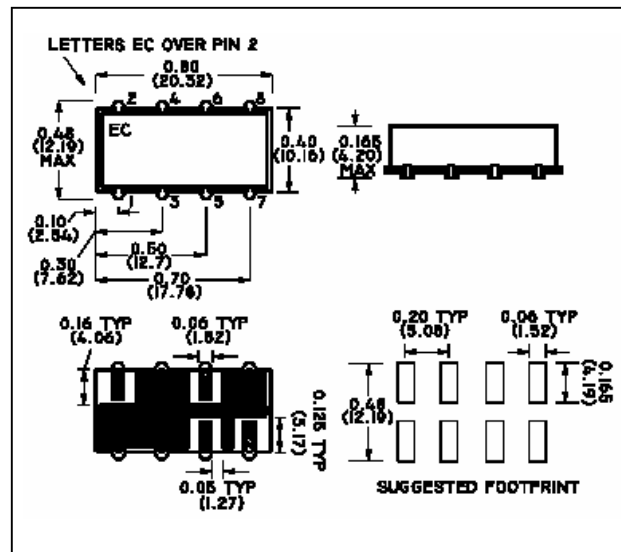

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
LO Frequency	—	390 - 420	MHz	—	—	—
I/Q Frequency	—	DC - 0.27	MHz	—	—	—
LO Carrier Suppression	When Q = +90 degrees relative to I; Lower sideband is suppressed. Related to wanted sideband power.	390 - 420	dBc	30	35	—
SSB Rejection		390 - 420	dBc	30	35	—
Harmonic Suppression 3 x I/Q		390 - 420	dBc	35	45	—
Harmonic Suppression 5 x I/Q		390 - 420	dBc	45	55	—
Conversion Loss	—	390 - 420	dB	—	7.4	9
(LO) Carrier Power	—	390 - 420	dBm	—	+10 ± 1	—
I/Q Drive Level	—	390 - 420	dBm	—	-10	—
Sideband Suppression	—	380 - 390	dBc	25	30	—
Sideband Suppression	—	420 - 430	dBc	25	30	—
Carrier Suppression	—	380 - 430	dBc	30	35	—

Ordering Information

Part Number	Package
EKIN2-390XTR	Tape and Reel (300 piece Reel)

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

Absolute Maximum Ratings ¹

Parameter	Absolute Maximum
Impedance	50 Ohms Nominal
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C
Pin Temperature (10 seconds)	260°C

1. Operation of this device above any one of these parameters may cause permanent damage.

Pin Configuration

Pin No.	Function
1	LO
2	Case Ground
3	Case Ground
4	Case Ground
5	I
6	Q
7	Case Ground
8	RF