




Description

The GM71V(S)17403C/CL is the new generation dynamic RAM organized 4,194,304 words x 4 bit. GM71V(S)17403C/CL has realized higher density, higher performance and various functions by utilizing advanced CMOS process technology. The GM71V(S)17403C/CL offers Extended Data Out (EDO) Page Mode as a high speed access mode. Multiplexed address inputs permit the GM71V(S)17403C/CL to be packaged in a standard 300 mil 24(26) pin SOJ, and a standard 300 mil 24(26) pin plastic TSOP II. The package size provides high system bit densities and is compatible with widely available automated testing and insertion equipment. System oriented features include single power supply 3.3V +/- 0.3V tolerance, direct interfacing capability with high performance logic families such as Schottky TTL.

Pin Configuration

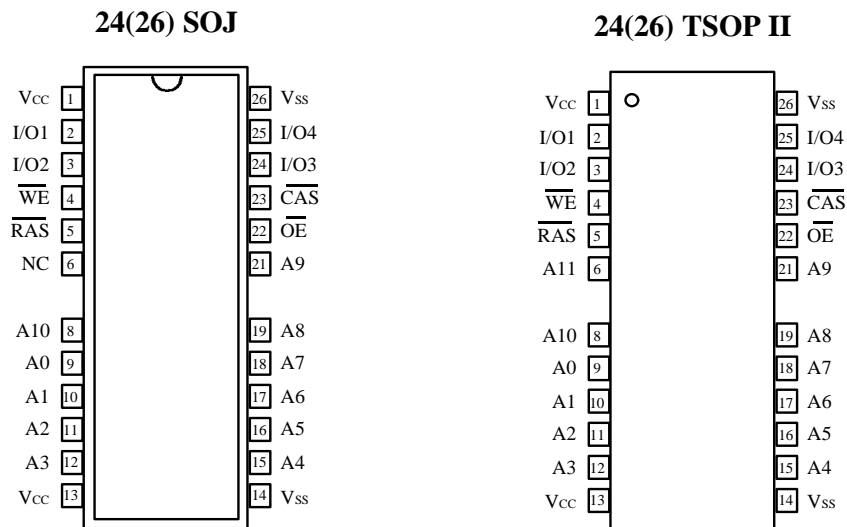

(Top View)

Features

- * 4,194,304 Words x 4 Bit Organization
- * Extended Data Out Mode Capability
- * Single Power Supply (3.3V +/- 0.3V)
- * Fast Access Time & Cycle Time

(Unit: ns)

| | t _{RAC} | t _{CAC} | t _{RC} | t _{HPC} |
|---------------------|------------------|------------------|-----------------|------------------|
| GM71V(S)17403C/CL-5 | 50 | 13 | 84 | 20 |
| GM71V(S)17403C/CL-6 | 60 | 15 | 104 | 25 |
| GM71V(S)17403C/CL-7 | 70 | 18 | 124 | 30 |

- * Low Power
 - Active : 432/369/360mW (MAX)
 - Standby : 7.2mW (CMOS level : MAX)
 - : 0.36mW (L-version : MAX)
- * $\overline{\text{RAS}}$ Only Refresh, $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ Refresh, Hidden Refresh Capability
- * All inputs and outputs TTL Compatible
- * 2048 Refresh Cycles/32ms
- * 2048 Refresh Cycles/128ms (L-version)
- * Self Refresh Operation (L-version)
- * Battery Backup Operation (L-version)
- * Test Function : 16bit parallel test mode

Pin Description

| Pin | Function | Pin | Function |
|------------------|------------------------|-----------------|-------------------|
| A0-A10 | Address Inputs | \overline{WE} | Read/Write Enable |
| A0-A10 | Refresh Address Inputs | \overline{OE} | Output Enable |
| I/O1-I/O4 | Data Input/Data Output | V _{CC} | Power (+3.3V) |
| \overline{RAS} | Row Address Strobe | V _{SS} | Ground |
| \overline{CAS} | Column Address Strobe | NC | No Connection |

Ordering Information

| Type No. | Access Time | Package |
|---|----------------------|--|
| GM71V(S)17403CJ/CLJ-5 GM71V(S)17403CJ/CLJ-6 GM71V(S)17403CJ/CLJ-7 | 50ns 60ns 70ns | 300 Mil 24(26) Pin Plastic SOJ |
| GM71V(S)17403CT/CLT-5 GM71V(S)17403CT/CLT-6 GM71V(S)17403CT/CLT-7 | 50ns 60ns 70ns | 300 Mil 24(26) Pin Plastic TSOP II |

Absolute Maximum Ratings

| Symbol | Parameter | Rating | Unit |
|---------------------|--|---|------|
| T _A | Ambient Temperature under Bias | 0 ~ 70 | C |
| T _{STG} | Storage Temperature | -55 ~ 125 | C |
| V _{IN/OUT} | Voltage on any Pin Relative to V _{SS} | -0.5 ~ V _{CC} +0.5 (≤4.6V(MAX)) | V |
| V _{CC} | Supply Voltage Relative to V _{SS} | -0.5 ~ 4.6 | V |
| I _{OUT} | Short Circuit Output Current | 50 | mA |
| P _D | Power Dissipation | 1.0 | W |

Recommended DC Operating Conditions (T_A = 0 ~ 70C)

| Symbol | Parameter | Min | Typ | Max | Unit |
|-----------------|--------------------|------|-----|-----------------------|------|
| V _{CC} | Supply Voltage | 3.0 | 3.3 | 3.6 | V |
| V _{IH} | Input High Voltage | 2.0 | - | V _{CC} + 0.3 | V |
| V _{IL} | Input Low Voltage | -0.3 | - | 0.8 | V |

Note: All voltage referred to V_{SS}.

DC Electrical Characteristics ($V_{CC} = 3.3V \pm 0.3V$, $V_{SS} = 0V$, $T_A = 0 \sim 70C$)

| Symbol | Parameter | Min | Max | Unit | Note | |
|------------|--|------|----------|---------|------|------|
| V_{OH} | Output Level Output "H" Level Voltage ($I_{OUT} = -2mA$) | 2.4 | V_{CC} | V | | |
| V_{OL} | Output Level Output "L" Level Voltage ($I_{OUT} = 2mA$) | 0 | 0.4 | V | | |
| I_{CC1} | Operating Current Average Power Supply Operating Current (\overline{RAS} , \overline{CAS} Cycling : $t_{RC} = t_{RC\ min}$) | 50ns | - | 100 | mA | 1, 2 |
| | | 60ns | - | 90 | | |
| | | 70ns | - | 80 | | |
| I_{CC2} | Standby Current (TTL) Power Supply Standby Current (\overline{RAS} , $\overline{CAS} = V_{IH}$, $D_{OUT} = High-Z$) | - | 2 | mA | | |
| I_{CC3} | \overline{RAS} Only Refresh Current Average Power Supply Current \overline{RAS} Only Refresh Mode ($t_{RC} = t_{RC\ min}$) | 50ns | - | 100 | mA | 2 |
| | | 60ns | - | 90 | | |
| | | 70ns | - | 80 | | |
| I_{CC4} | EDO Page Mode Current Average Power Supply Current EDO Page Mode ($t_{HPC} = t_{HPC\ min}$) | 50ns | - | 90 | mA | 1, 3 |
| | | 60ns | - | 80 | | |
| | | 70ns | - | 75 | | |
| I_{CC5} | Standby Current (CMOS) Power Supply Standby Current (\overline{RAS} , $\overline{CAS} \geq V_{CC} - 0.2V$, $D_{OUT} = High-Z$) | - | 1 | mA | 5 | |
| | | - | 100 | μA | | |
| I_{CC6} | \overline{CAS} -before- \overline{RAS} Refresh Current ($t_{RC} = t_{RC\ min}$) | 50ns | - | 100 | mA | |
| | | 60ns | - | 90 | | |
| | | 70ns | - | 80 | | |
| I_{CC7} | Battery Backup Operating Current(Standby with CBR Refresh) (CBR refresh, $t_{RC} = 31.3\mu s$, $t_{RAS} \leq 0.3\mu s$, $D_{OUT} = High-Z$, CMOS interface) | - | 300 | μA | 4,5 | |
| I_{CC8} | Standby Current $\overline{RAS} = V_{IH}$ $\overline{CAS} = V_{IL}$ $D_{OUT} = Enable$ | - | 5 | mA | 1 | |
| I_{CC9} | Self-Refresh Mode Current (\overline{RAS} , $\overline{CAS} \leq 0.2V$, $D_{OUT} = High-Z$, CMOS interface) | - | 200 | μA | 5 | |
| $I_{L(i)}$ | Input Leakage Current Any Input ($0V \leq V_{IN} \leq 4.6V$) | -10 | 10 | μA | | |
| $I_{L(o)}$ | Output Leakage Current (D_{OUT} is Disabled, $0V \leq V_{OUT} \leq 4.6V$) | -10 | 10 | μA | | |

Note: 1. I_{CC} depends on output load condition when the device is selected.

$I_{CC(max)}$ is specified at the output open condition.

- Address can be changed once or less while $\overline{RAS} = V_{IL}$.
- Address can be changed once or less while $\overline{CAS} = V_{IH}$.
- $\overline{CAS} = L$ (≤ 0.2) while $\overline{RAS} = L$ (≤ 0.2).
- L - Version.

Capacitance ($V_{CC} = 3.3V \pm 0.3V$, $T_A = 25C$)

| Symbol | Parameter | Min | Max | Unit | Note |
|------------------|----------------------------------|-----|-----|------|------|
| C _{I1} | Input Capacitance (Address) | - | 5 | pF | 1 |
| C _{I2} | Input Capacitance (Clocks) | - | 7 | pF | 1 |
| C _{I/O} | Output Capacitance (Data-In/Out) | - | 7 | pF | 1, 2 |

Note: 1. Capacitance measured with Boonton Meter or effective capacitance measuring method.
 2. $\overline{CAS} = V_{IH}$ to disable D_{OUT}.

AC Characteristics ($V_{CC} = 3.3V \pm 0.3V$, $V_{SS} = 0V$, $T_A = 0 \sim 70C$, Notes 1, 2, 18)

Test Conditions

Input rise and fall times : 2ns

 Input levels : $V_{IL} = 0V$, $V_{IH} = 3V$

Input timing reference levels : 0.8V, 2.0V

Output timing reference levels : 0.8V, 2.0V

 Output load : 1 TTL gate + C_L (100pF)

(Including scope and jig)

Read, Write, Read-Modify-Write and Refresh Cycles (Common Parameters)

| Symbol | Parameter | GM71V(S)17403 C/CL-5 | | GM71V(S)17403 C/CL-6 | | GM71V(S)17403 C/CL-7 | | Unit | Note |
|------------------|---|-------------------------|--------|-------------------------|--------|-------------------------|--------|------|------|
| | | Min | Max | Min | Max | Min | Max | | |
| t _{RC} | Random Read or Write Cycle Time | 84 | - | 104 | - | 124 | - | ns | |
| t _{RP} | \overline{RAS} Precharge Time | 30 | - | 40 | - | 50 | - | ns | |
| t _{CP} | \overline{CAS} Precharge Time | 8 | - | 10 | - | 13 | - | ns | |
| t _{RAS} | \overline{RAS} Pulse Width | 50 | 10,000 | 60 | 10,000 | 70 | 10,000 | ns | |
| t _{CAS} | \overline{CAS} Pulse Width | 8 | 10,000 | 10 | 10,000 | 13 | 10,000 | ns | |
| t _{ASR} | Row Address Set up Time | 0 | - | 0 | - | 0 | - | ns | |
| t _{RAH} | Row Address Hold Time | 8 | - | 10 | - | 10 | - | ns | |
| t _{ASC} | Column Address Set-up Time | 0 | - | 0 | - | 0 | - | ns | |
| t _{CAH} | Column Address Hold Time | 8 | - | 10 | - | 13 | - | ns | |
| t _{RCD} | \overline{RAS} to \overline{CAS} Delay Time | 12 | 37 | 14 | 45 | 14 | 52 | ns | 3 |
| t _{RAD} | \overline{RAS} to Column Address Delay Time | 10 | 25 | 12 | 30 | 12 | 35 | ns | 4 |
| t _{RSH} | \overline{RAS} Hold Time | 10 | - | 13 | - | 13 | - | ns | |
| t _{CSH} | \overline{CAS} Hold Time | 35 | - | 40 | - | 45 | - | ns | |
| t _{CRP} | \overline{CAS} to \overline{RAS} Precharge Time | 5 | - | 5 | - | 5 | - | ns | |
| t _{ODD} | \overline{OE} to D _{IN} Delay Time | 13 | - | 15 | - | 18 | - | ns | 5 |
| t _{DZO} | \overline{OE} Delay Time from D _{IN} | 0 | - | 0 | - | 0 | - | ns | 6 |
| t _{DZC} | \overline{CAS} Delay Time from D _{IN} | 0 | - | 0 | - | 0 | - | ns | 6 |
| t _r | Transition Time (Rise and Fall) | 2 | 50 | 2 | 50 | 2 | 50 | ns | 7 |

Read Cycle

| Symbol | Parameter | GM71V(S)17403 C/CL-5 | | GM71V(S)17403 C/CL-6 | | GM71V(S)17403 C/CL-7 | | Unit | Note |
|-------------------|--|-------------------------|-----|-------------------------|-----|-------------------------|-----|------|----------------|
| | | Min | Max | Min | Max | Min | Max | | |
| t _{RAC} | Access Time from $\overline{\text{RAS}}$ | - | 50 | - | 60 | - | 70 | ns | 8.9,19 |
| t _{CAC} | Access Time from $\overline{\text{CAS}}$ | - | 13 | - | 15 | - | 18 | ns | 9,10, 17,19 |
| t _{AA} | Access Time from Address | - | 25 | - | 30 | - | 35 | ns | 9,11, 17,19 |
| t _{OAC} | Access Time from $\overline{\text{OE}}$ | - | 13 | - | 15 | - | 18 | ns | 9 |
| t _{RCS} | Read Command Setup Time | 0 | - | 0 | - | 0 | - | ns | |
| t _{RCH} | Read Command Hold Time to $\overline{\text{CAS}}$ | 0 | - | 0 | - | 0 | - | ns | 12 |
| t _{RCHR} | Read Command Hold Time from $\overline{\text{RAS}}$ | 50 | - | 60 | - | 70 | - | ns | |
| t _{RRH} | Read Command Hold Time to $\overline{\text{RAS}}$ | 5 | - | 5 | - | 5 | - | ns | 12 |
| t _{RAL} | Column Address to $\overline{\text{RAS}}$ Lead Time | 25 | - | 30 | - | 35 | - | ns | |
| t _{CAL} | Column Address to $\overline{\text{CAS}}$ Lead Time | 15 | - | 18 | - | 23 | - | ns | |
| t _{CLZ} | $\overline{\text{CAS}}$ to Output in low-Z | 0 | - | 0 | - | 0 | - | ns | |
| t _{OH} | Output Data Hold Time | 3 | - | 3 | - | 3 | - | ns | |
| t _{OH0} | Output Data Hold Time from $\overline{\text{OE}}$ | 3 | - | 3 | - | 3 | - | ns | |
| t _{OEZ} | Output Buffer Turn-off Time to $\overline{\text{OE}}$ | - | 13 | - | 15 | - | 15 | ns | 13 |
| t _{OFF} | Output Buffer Turn-off Time | - | 13 | - | 15 | - | 15 | ns | 13 |
| t _{CDD} | $\overline{\text{CAS}}$ to D _{IN} Delay Time | 13 | - | 15 | - | 18 | - | ns | 5 |
| t _{OHR} | Output Data Hold Time from $\overline{\text{RAS}}$ | 3 | - | 3 | - | 3 | - | ns | |
| t _{OFR} | Output Buffer Turn-off Time to $\overline{\text{RAS}}$ | - | 13 | - | 15 | - | 15 | ns | |
| t _{WEZ} | Output Buffer Turn-off to $\overline{\text{WE}}$ | - | 13 | - | 15 | - | 15 | ns | |
| t _{WDD} | $\overline{\text{WE}}$ to D _{IN} Delay Time | 13 | - | 15 | - | 18 | - | ns | |
| t _{RDD} | $\overline{\text{RAS}}$ to D _{IN} Delay Time | 13 | - | 15 | - | 18 | - | ns | |

Write Cycle

| Symbol | Parameter | GM71V(S)17403 C/CL-5 | | GM71V(S)17403 C/CL-6 | | GM71V(S)17403 C/CL-7 | | Unit | Note |
|------------------|--|-------------------------|-----|-------------------------|-----|-------------------------|-----|------|------|
| | | Min | Max | Min | Max | Min | Max | | |
| t _{WCS} | Write Command Setup Time | 0 | - | 0 | - | 0 | - | ns | 14 |
| t _{WCH} | Write Command Hold Time | 8 | - | 10 | - | 13 | - | ns | |
| t _{WP} | Write Command Pulse Width | 8 | - | 10 | - | 10 | - | ns | |
| t _{RWL} | Write Command to $\overline{\text{RAS}}$ Lead Time | 8 | - | 10 | - | 13 | - | ns | |
| t _{CWL} | Write Command to $\overline{\text{CAS}}$ Lead Time | 8 | - | 10 | - | 13 | - | ns | |
| t _{DS} | Data-in Setup Time | 0 | - | 0 | - | 0 | - | ns | 15 |
| t _{DH} | Data-in Hold Time | 8 | - | 10 | - | 13 | - | ns | 15 |

Read-Modify-Write Cycle

| Symbol | Parameter | GM71V(S)17403 C/CL-5 | | GM71V(S)17403 C/CL-6 | | GM71V(S)17403 C/CL-7 | | Unit | Note |
|------------------|--|-------------------------|-----|-------------------------|-----|-------------------------|-----|------|------|
| | | Min | Max | Min | Max | Min | Max | | |
| t _{RWC} | Read-Modify-Write Cycle Time | 111 | - | 136 | - | 161 | - | ns | |
| t _{RWD} | $\overline{\text{RAS}}$ to $\overline{\text{WE}}$ Delay Time | 67 | - | 79 | - | 92 | - | ns | 14 |
| t _{CWD} | $\overline{\text{CAS}}$ to $\overline{\text{WE}}$ Delay Time | 30 | - | 34 | - | 40 | - | ns | 14 |
| t _{AWD} | Column Address to $\overline{\text{WE}}$ Delay Time | 42 | - | 49 | - | 57 | - | ns | 14 |
| t _{OEH} | $\overline{\text{OE}}$ Hold Time from $\overline{\text{WE}}$ | 13 | - | 15 | - | 18 | - | ns | |

Refresh Cycle

| Symbol | Parameter | GM71V(S)17403 C/CL-5 | | GM71V(S)17403 C/CL-6 | | GM71V(S)17403 C/CL-7 | | Unit | Note |
|------------------|---|-------------------------|-----|-------------------------|-----|-------------------------|-----|------|------|
| | | Min | Max | Min | Max | Min | Max | | |
| t _{CSR} | $\overline{\text{CAS}}$ Setup Time ($\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ Refresh Cycle) | 5 | - | 5 | - | 5 | - | ns | |
| t _{CHR} | $\overline{\text{CAS}}$ Hold Time ($\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ Refresh Cycle) | 8 | - | 10 | - | 10 | - | ns | |
| t _{WRP} | $\overline{\text{WE}}$ Setup Time ($\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ Refresh Cycle) | 0 | - | 0 | - | 0 | - | ns | |
| t _{WRH} | $\overline{\text{WE}}$ Hold Time ($\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ Refresh Cycle) | 10 | - | 10 | - | 10 | - | ns | |
| t _{RPC} | $\overline{\text{RAS}}$ Precharge to $\overline{\text{CAS}}$ Hold Time | 5 | - | 5 | - | 5 | - | ns | |

EDO Page Mode Cycle

| Symbol | Parameter | GM71V(S)17403 C/CL-5 | | GM71V(S)17403 C/CL-6 | | GM71V(S)17403 C/CL-7 | | Unit | Note |
|--------------------|--|-------------------------|---------|-------------------------|---------|-------------------------|---------|------|---------|
| | | Min | Max | Min | Max | Min | Max | | |
| t _{HPC} | EDO Page Mode Cycle Time | 20 | - | 25 | - | 30 | - | ns | 20 |
| t _{TRASP} | EDO Page Mode $\overline{\text{RAS}}$ Pulse Width | - | 100,000 | - | 100,000 | - | 100,000 | ns | 16 |
| t _{ACP} | Access Time from $\overline{\text{CAS}}$ Precharge | - | 30 | - | 35 | - | 40 | ns | 9,17,19 |
| t _{RHCP} | $\overline{\text{RAS}}$ Hold Time from $\overline{\text{CAS}}$ Precharge | 30 | - | 35 | - | 40 | - | ns | |
| t _{DOH} | Output data Hold Time from $\overline{\text{CAS}}$ low | 3 | - | 3 | - | 3 | - | ns | 9 |
| t _{COL} | $\overline{\text{CAS}}$ Hold Time referred $\overline{\text{OE}}$ | 8 | - | 10 | - | 13 | - | ns | |
| t _{COP} | $\overline{\text{CAS}}$ to $\overline{\text{OE}}$ Setup Time | 5 | - | 5 | - | 5 | - | ns | |
| t _{RCHP} | Read command Hold Time from $\overline{\text{CAS}}$ Precharge | 30 | - | 35 | - | 40 | - | ns | |

EDO Page Mode Read-Modify-Write Cycle

| Symbol | Parameter | GM71V(S)17403 C/CL-5 | | GM71V(S)17403 C/CL-6 | | GM71V(S)17403 C/CL-7 | | Unit | Note |
|--------------------|--|-------------------------|-----|-------------------------|-----|-------------------------|-----|------|------|
| | | Min | Max | Min | Max | Min | Max | | |
| t _{HPRWC} | EDO Page Mode Read-Modify-Write Cycle Time | 57 | - | 68 | - | 79 | - | ns | |
| t _{CPW} | $\overline{\text{WE}}$ Delay Time from $\overline{\text{CAS}}$ Precharge | 45 | - | 54 | - | 62 | - | ns | 14 |

Test Mode Cycle ^{*18}

| Symbol | Parameter | GM71V(S)17403 C/CL-5 | | GM71V(S)17403 C/CL-6 | | GM71V(S)17403 C/CL-7 | | Unit | Note |
|------------------|---|-------------------------|-----|-------------------------|-----|-------------------------|-----|------|------|
| | | Min | Max | Min | Max | Min | Max | | |
| t _{WTS} | Test Mode $\overline{\text{WE}}$ Setup Time | 0 | - | 0 | - | 0 | - | ns | |
| t _{WTH} | Test Mode $\overline{\text{WE}}$ Hold Time | 10 | - | 10 | - | 10 | - | ns | |

Refresh

| Symbol | Parameter | GM71V(S)17403 C/CL-5 | | GM71V(S)17403 C/CL-6 | | GM71V(S)17403 C/CL-7 | | Unit | Note |
|------------------|------------------------------|-------------------------|-----|-------------------------|-----|-------------------------|-----|------|-------------|
| | | Min | Max | Min | Max | Min | Max | | |
| t _{REF} | Refresh Period | - | 32 | - | 32 | - | 32 | ms | 2048 cycles |
| t _{REF} | Refresh Period (L - version) | - | 128 | - | 128 | - | 128 | ms | 2048 cycles |

Self Refresh Mode (L-version)

| Symbol | Parameter | GM71VS17403 CL-5 | | GM71VS17403 CL-6 | | GM71VS17403 CL-7 | | Unit | Note |
|-------------------|---|---------------------|-----|---------------------|-----|---------------------|-----|------|------|
| | | Min | Max | Min | Max | Min | Max | | |
| t _{RASS} | $\overline{\text{RAS}}$ Pulse Width (Self-refresh) | 100 | - | 100 | - | 100 | - | μs | |
| t _{RPS} | $\overline{\text{RAS}}$ Precharge Time (Self-refresh) | 90 | - | 110 | - | 130 | - | ns | |
| t _{CHS} | $\overline{\text{CAS}}$ Hold Time (Self-refresh) | -50 | - | -50 | - | -50 | - | ns | |


Notes:

1. AC Measurements assume $t_r = 2\text{ns}$.
2. An initial pause of 200us is required after power up followed by a minimum of eight initialization cycles (any combination of cycles containing $\overline{\text{RAS}}$ -only refresh or $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh). If the internal refresh counter is used, a minimum of eight $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycles are required.
3. Operation with the t_{RCd(max)} limit insures that t_{RAc(max)} can be met, t_{RCd(max)} is specified as a reference point only; if t_{RCd} is greater than the specified t_{RCd(max)} limit, then access time is controlled exclusively by t_{CAC}.
4. Operation with the t_{RAd(max)} limit insures that t_{RAc(max)} can be met, t_{RAd(max)} is specified as a reference point only; if t_{RAd} is greater than the specified t_{RAd(max)} limit, then access time is controlled exclusively by t_{AA}.
5. Either t_{ODD} or t_{CDD} must be satisfied.
6. Either t_{DZO} or t_{DZC} must be satisfied.
7. V_{IH(min)} and V_{IL(max)} are reference levels for measuring timing of input signals. Also, transition times are measured between V_{IH(min)} and V_{IL(max)}.
8. Assume that t_{RCd} ≤ t_{RCd(max)} and t_{RAd} ≤ t_{RAd(max)}. If t_{RCd} or t_{RAd} is greater than the maximum recommended value shown in this table, t_{RAc} exceeds the value shown.
9. Measured with a load circuit equivalent to 1 TTL loads and 100pF.
10. Assume that t_{RCd} ≥ t_{RCd(max)} and t_{RCd} + t_{CAC(max)} ≥ t_{RAd} + t_{AA(max)}.
11. Assume that t_{RAd} ≥ t_{RAd(max)} and t_{RCd} + t_{CAC(max)} ≤ t_{RAd} + t_{AA(max)}.
12. Either t_{RCH} or t_{RRH} must be satisfied for a read cycles.
13. t_{OFF(max)} and t_{OEZ(max)} define the time at which the outputs achieve the open circuit condition and are not referenced to output voltage levels.

14. t_{WCS} , t_{RWD} , t_{CWD} , t_{AWD} and t_{CPW} are not restrictive operating parameters. They are included in the data sheet as electrical characteristics only; if $t_{WCS} \geq t_{WCS}(\min)$, the cycle is an early write cycle and the data out pin will remain open circuit (high impedance) throughout the entire cycle; if $t_{RWD} \geq t_{RWD}(\min)$, the $t_{CWD} \geq t_{CWD}(\min)$, and $t_{AWD} \geq t_{AWD}(\min)$, or $t_{CWD} \geq t_{CWD}(\min)$, $t_{AWD} \geq t_{AWD}(\min)$ and $t_{CPW} \geq t_{CPW}(\min)$, the cycle is a read-modify-write and the data output will contain data read from the selected cell; if neither of the above sets of conditions is satisfied, the condition of the data out (at access time) is indeterminate.
15. These parameters are referenced to \overline{CAS} leading edge in early write cycles and to \overline{WE} leading edge in delayed write or read-modify-write cycles.
16. t_{RASP} defines \overline{RAS} pulse width in EDO page mode cycles.
17. Access time is determined by the longest among t_{AA} or t_{CAC} or t_{ACP} .
18. The 16M DRAM offers a 16-bit time saving parallel test mode. Address $\overline{CA0}$ and $\overline{CA1}$ for the $4M \times 4$ are don't care during test mode. Test mode is set by performing a \overline{WE} -and- \overline{CAS} -before- \overline{RAS} (WCBR) cycle. In 16-bit parallel test mode, data is written into 4 bits in parallel at each I/O ($I/O1$ to $I/O4$) and read out from each I/O. If 4 bits of each I/O are equal (all 1s or 0s), data output pin is a high state during test mode read cycle, then the device has passed. If they are not equal, data output pin is a low state, then the device has failed. Refresh during test mode operation can be performed by normal read cycles or by WCBR refresh cycles. To get out of test mode and enter a normal operation mode, perform either a regular \overline{CAS} -before- \overline{RAS} refresh cycle or \overline{RAS} -only refresh cycle.
19. In a test mode read cycle, the value of t_{RAC} , t_{AA} , t_{CAC} and t_{ACP} is delayed by 2ns to 5ns for the specified value. These parameters should be specified in test mode cycles by adding the above value to the specified value in this data sheet.
20. $t_{HPC}(\min)$ can be achieved during a series of EDO page mode write cycles or EDO page mode read cycles. If both write and read operation are mixed in a EDO page mode \overline{RAS} cycle (EDO page mode mix cycle (1),(2)), minimum value of \overline{CAS} cycle ($t_{CAS} + t_{CP} + 2t_T$) becomes greater than the specified $t_{HPC}(\min)$ value. The value of \overline{CAS} cycle time of mixed EDO page mode is shown in EDO page mode mix cycle (1) and (2).

Package Dimension

Unit: Inches (mm)

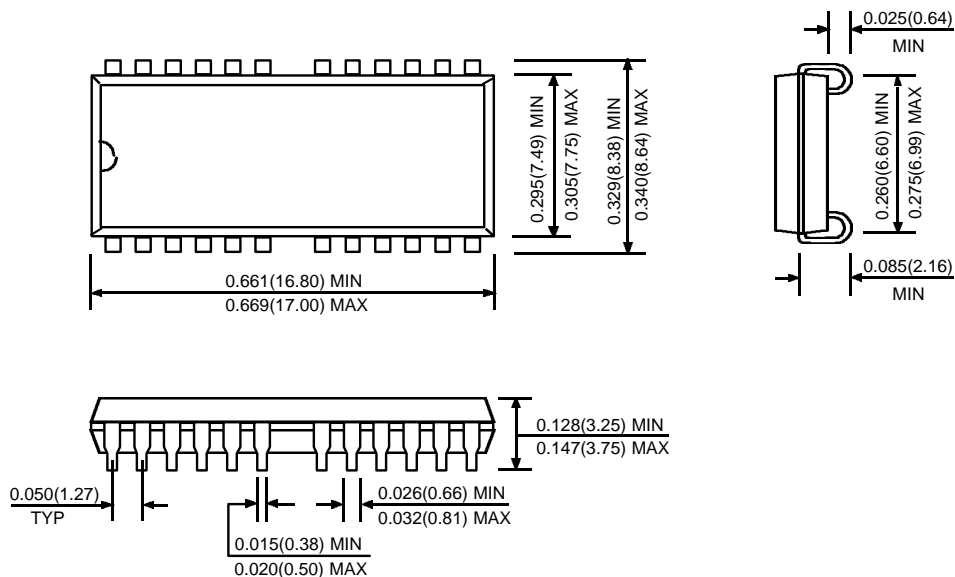24(26) SOJ

24(26) TSOP (TYPE II)
