

MICROWAVE LOW NOISE AMPLIFIER
NPN SILICON EPITAXIAL TRANSISTOR
(WITH BUILT-IN 2 ELEMENTS) MINI MOLD

FEATURES

- Low Voltage Operation, Low Phase Distortion
- Low Noise
NF = 1.5 dB TYP. @ $V_{CE} = 3$ V, $I_C = 7$ mA, $f = 2$ GHz
NF = 1.7 dB TYP. @ $V_{CE} = 1$ V, $I_C = 3$ mA, $f = 2$ GHz
- Large Absolute Maximum Collector Current
 $I_C = 100$ mA
- A Mini Mold Package Adopted
- Built-in 2 Transistors ($2 \times 2SC5193$)

ORDERING INFORMATION

| PART NUMBER | QUANTITY | PACKING STYLE |
|-----------------|----------------------------------|---|
| μ PA809T | Loose products (50 PCS) | Embossed tape 8 mm wide. Pin 6 (Q1 Base), Pin 5 (Q2 Base), Pin 4 (Q2 Emitter) face to perforation side of the tape. |
| μ PA809T-T1 | Taping products (3 KPCS/Reel) | |

Remark If you require an evaluation sample, please contact an NEC Sales Representative. (Unit sample quantity is 50 pcs.)



ABSOLUTE MAXIMUM RATINGS ($T_A = 25$ °C)

| PARAMETER | SYMBOL | RATING | UNIT |
|------------------------------|-----------|---|------|
| Collector to Base Voltage | V_{CBO} | 9 | V |
| Collector to Emitter Voltage | V_{CEO} | 6 | V |
| Emitter to Base Voltage | V_{EBO} | 2 | V |
| Collector Current | I_C | 100 | mA |
| Total Power Dissipation | P_T | 150 in 1 element 200 in 2 elements ^{Note} | mW |
| Junction Temperature | T_J | 150 | °C |
| Storage Temperature | T_{stg} | -65 to +150 | °C |


Note 110 mW must not be exceeded in 1 element.

PACKAGE DRAWINGS

(Unit: mm)

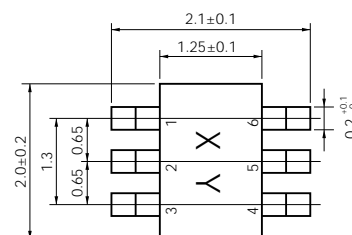

PIN CONFIGURATION (Top View)



PIN CONNECTIONS

- | | |
|-------------------|-----------------|
| 1. Collector (Q1) | 4. Emitter (Q2) |
| 2. Emitter (Q1) | 5. Base (Q2) |
| 3. Collector (Q2) | 6. Base (Q1) |

This device uses radio frequency technology. Take due precautions to protect it from excessive input levels such as static electricity.

The information in this document is subject to change without notice.

ELECTRICAL CHARACTERISTICS (T_A = 25 °C)

| PARAMETER | SYMBOL | CONDITION | MIN. | TYP. | MAX. | UNIT |
|----------------------------|------------------------------------|---|------|------|------|------|
| Collector Cutoff Current | I _{CBO} | V _{CB} = 5 V, I _E = 0 | | | 0.1 | μA |
| Emitter Cutoff Current | I _{EBO} | V _{EB} = 1 V, I _C = 0 | | | 0.1 | μA |
| DC Current Gain | h _{FE} | V _{CE} = 1 V, I _C = 3 mA ^{Note 1} | 80 | | 160 | |
| Gain Bandwidth Product (1) | f _T | V _{CE} = 1 V, I _C = 3 mA, f = 2 GHz | 4.0 | 4.5 | | GHz |
| Gain Bandwidth Product (2) | f _T | V _{CE} = 3 V, I _C = 20 mA, f = 2 GHz | | 9.0 | | GHz |
| Feed-back Capacitance | C _{re} | V _{CB} = 1 V, I _E = 0, f = 1 MHz ^{Note 2} | | 0.75 | 0.85 | pF |
| Insertion Power Gain (1) | S ₂₁ ² | V _{CE} = 1 V, I _C = 3 mA, f = 2 GHz | 2.5 | 3.5 | | dB |
| Insertion Power Gain (2) | S ₂₁ ² | V _{CE} = 3 V, I _C = 20 mA, f = 2 GHz | | 6.5 | | dB |
| Noise Figure (1) | NF | V _{CE} = 1 V, I _C = 3 mA, f = 2 GHz | | 1.7 | 2.5 | dB |
| Noise Figure (2) | NF | V _{CE} = 3 V, I _C = 7 mA, f = 2 GHz | | 1.5 | | dB |
| h _{FE} Ratio | h _{FE1} /h _{FE2} | V _{CE} = 1 V, I _C = 3 mA A smaller value among h _{FE} of h _{FE1} = Q1, Q2 A larger value among h _{FE} of h _{FE2} = Q1, Q2 | 0.85 | | | |







Notes 1. Pulse Measurement: P_w ≤ 350 μs, Duty cycle ≤ 2 %

2. Measured with 3-pin bridge, emitter and case should be connected to guard pin of bridge.


h_{FE} CLASSIFICATION

| | |
|-----------------------|-----------|
| Rank | KB |
| Marking | T88 |
| h _{FE} Value | 80 to 160 |


TYPICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$)

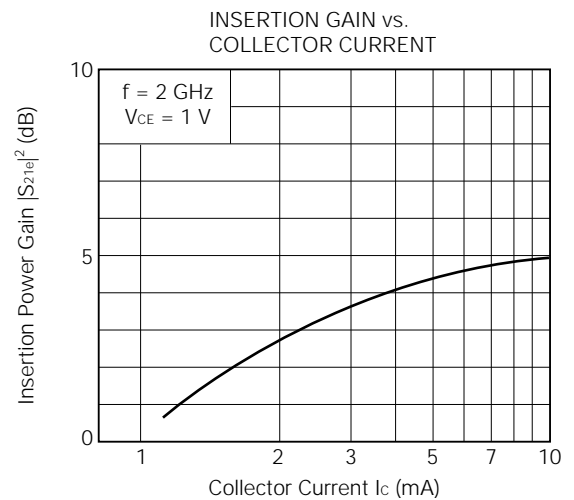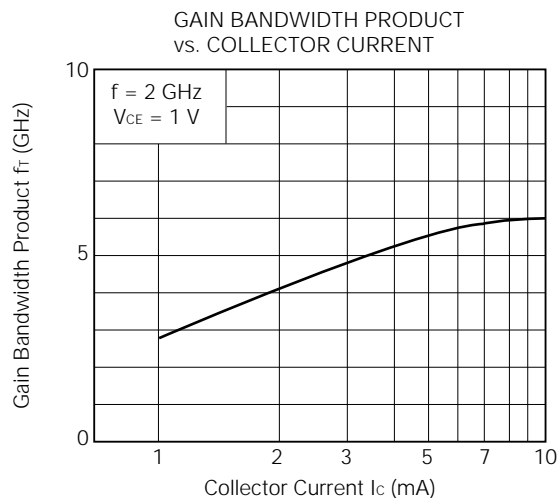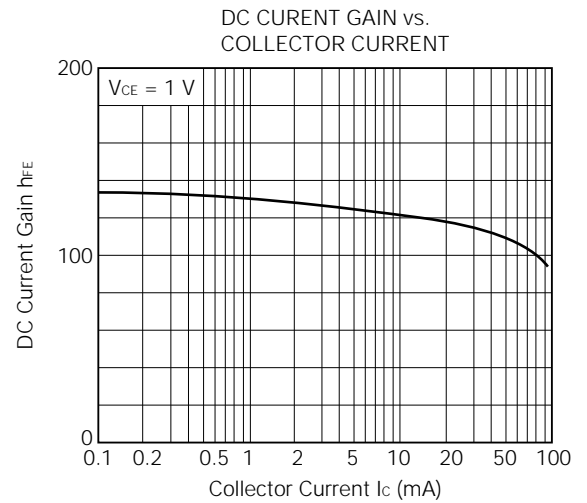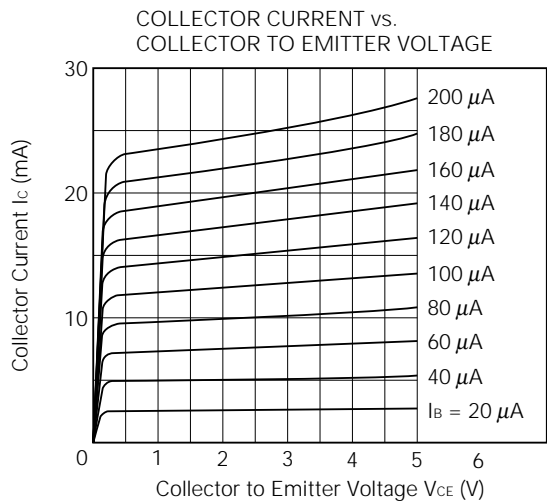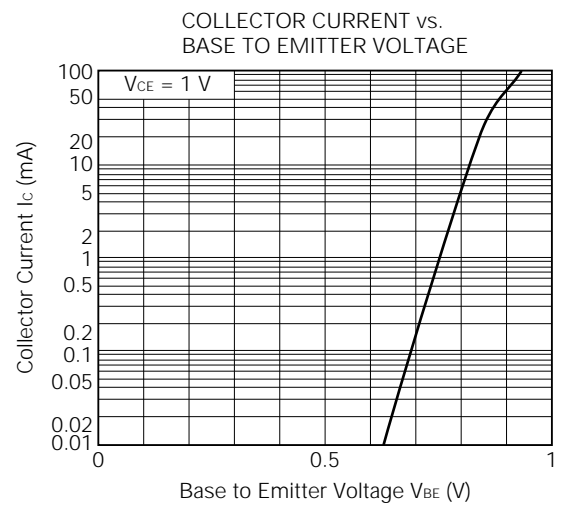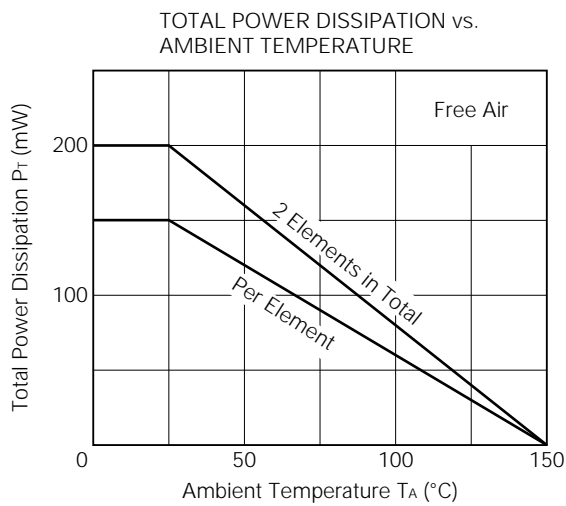


NOISE FIGURE vs. COLLECTOR CURRENT

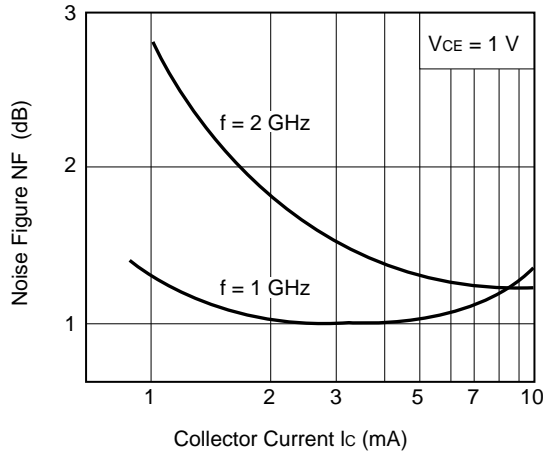


FEED-BACK CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

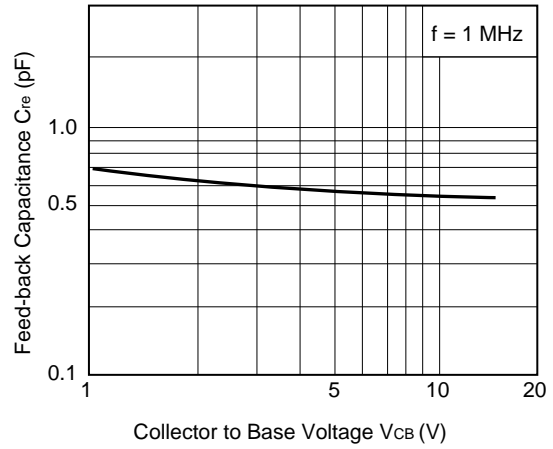

MAXIMUM AVAILABLE GAIN / INSERTION POWER GAIN vs. FREQUENCY

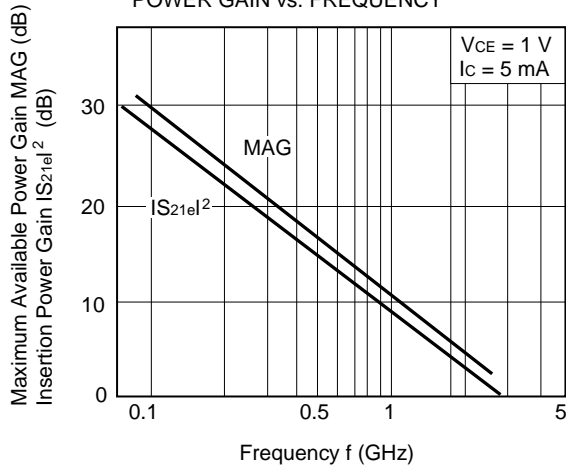

NOISE FIGURE vs. FREQUENCY

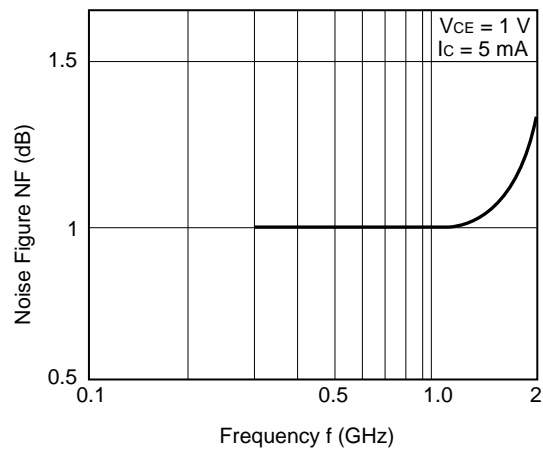

S-PARAMETERS

V_{CE} = 1 V, I_c = 1 mA, Z_o = 50 Ω

| FREQUENCY MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|-------|--------|-------|-------|-------|------|-------|-------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100.00 | 0.952 | -18.2 | 3.497 | 166.0 | 0.050 | 74.0 | 0.979 | -8.3 |
| 200.00 | 0.913 | -37.9 | 3.208 | 150.4 | 0.101 | 64.5 | 0.927 | -18.9 |
| 300.00 | 0.871 | -55.6 | 3.048 | 135.4 | 0.141 | 56.5 | 0.855 | -28.2 |
| 400.00 | 0.817 | -68.8 | 2.825 | 124.1 | 0.169 | 49.8 | 0.803 | -33.7 |
| 500.00 | 0.737 | -82.6 | 2.332 | 114.8 | 0.184 | 42.1 | 0.746 | -39.1 |
| 600.00 | 0.657 | -93.4 | 2.236 | 107.2 | 0.196 | 37.7 | 0.691 | -41.0 |
| 700.00 | 0.624 | -103.9 | 2.043 | 99.0 | 0.206 | 33.0 | 0.639 | -45.4 |
| 800.00 | 0.594 | -117.9 | 1.864 | 91.9 | 0.208 | 30.5 | 0.573 | -46.2 |
| 900.00 | 0.560 | -127.1 | 1.715 | 85.0 | 0.208 | 29.0 | 0.538 | -49.5 |
| 1000.00 | 0.544 | -137.0 | 1.593 | 80.3 | 0.203 | 27.8 | 0.494 | -51.7 |
| 1100.00 | 0.527 | -145.1 | 1.458 | 75.3 | 0.200 | 25.6 | 0.478 | -55.7 |
| 1200.00 | 0.534 | -154.5 | 1.391 | 70.9 | 0.195 | 24.4 | 0.450 | -60.1 |
| 1300.00 | 0.554 | -163.9 | 1.258 | 66.7 | 0.195 | 24.1 | 0.426 | -62.4 |
| 1400.00 | 0.566 | -169.0 | 1.200 | 63.5 | 0.194 | 25.6 | 0.409 | -66.3 |
| 1500.00 | 0.547 | -175.2 | 1.185 | 55.1 | 0.199 | 26.0 | 0.406 | -67.7 |
| 1600.00 | 0.523 | 179.3 | 1.176 | 51.3 | 0.201 | 29.6 | 0.392 | -72.4 |
| 1700.00 | 0.540 | 172.6 | 1.129 | 48.8 | 0.198 | 33.0 | 0.375 | -76.0 |
| 1800.00 | 0.530 | 165.2 | 1.109 | 47.4 | 0.199 | 37.3 | 0.370 | -80.9 |
| 1900.00 | 0.559 | 160.8 | 1.028 | 45.2 | 0.200 | 40.0 | 0.365 | -87.1 |
| 2000.00 | 0.571 | 156.2 | 0.981 | 43.6 | 0.203 | 43.2 | 0.364 | -91.0 |

V_{CE} = 1 V, I_c = 3 mA, Z_o = 50 Ω

| FREQUENCY MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|-------|--------|-------|-------|-------|------|-------|--------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100.00 | 0.864 | -29.3 | 8.784 | 157.7 | 0.050 | 64.3 | 0.927 | -16.5 |
| 200.00 | 0.768 | -37.8 | 7.364 | 136.9 | 0.088 | 56.8 | 0.797 | -34.0 |
| 300.00 | 0.675 | -79.1 | 6.372 | 139.7 | 0.115 | 51.1 | 0.667 | -46.3 |
| 400.00 | 0.584 | -94.9 | 5.374 | 110.1 | 0.130 | 47.2 | 0.568 | -52.1 |
| 500.00 | 0.504 | -110.1 | 4.501 | 102.3 | 0.138 | 44.1 | 0.485 | -55.8 |
| 600.00 | 0.455 | -123.0 | 3.906 | 96.2 | 0.148 | 43.4 | 0.430 | -57.0 |
| 700.00 | 0.428 | -134.7 | 3.298 | 89.7 | 0.156 | 42.3 | 0.380 | -61.3 |
| 800.00 | 0.405 | -145.9 | 2.938 | 84.1 | 0.163 | 42.8 | 0.321 | -63.1 |
| 900.00 | 0.381 | -154.2 | 2.915 | 79.4 | 0.171 | 43.7 | 0.286 | -64.8 |
| 1000.00 | 0.379 | -163.1 | 2.397 | 75.8 | 0.178 | 44.6 | 0.239 | -66.7 |
| 1100.00 | 0.374 | -171.9 | 2.196 | 72.0 | 0.184 | 44.7 | 0.246 | -70.8 |
| 1200.00 | 0.389 | -178.5 | 2.061 | 68.3 | 0.190 | 44.6 | 0.226 | -76.4 |
| 1300.00 | 0.404 | 174.9 | 1.916 | 64.3 | 0.198 | 44.2 | 0.201 | -79.4 |
| 1400.00 | 0.414 | 172.1 | 1.829 | 60.6 | 0.210 | 44.4 | 0.184 | -83.7 |
| 1500.00 | 0.411 | 165.7 | 1.759 | 55.5 | 0.225 | 44.2 | 0.176 | -85.9 |
| 1600.00 | 0.402 | 161.8 | 1.680 | 52.5 | 0.241 | 45.3 | 0.167 | -92.5 |
| 1700.00 | 0.417 | 156.7 | 1.606 | 50.1 | 0.249 | 48.9 | 0.159 | -97.7 |
| 1800.00 | 0.428 | 151.2 | 1.537 | 49.4 | 0.259 | 48.8 | 0.151 | -107.2 |
| 1900.00 | 0.446 | 148.4 | 1.458 | 47.4 | 0.265 | 48.7 | 0.130 | -114.4 |
| 2000.00 | 0.457 | 144.8 | 1.394 | 43.8 | 0.272 | 48.6 | 0.155 | -120.7 |

V_{CE} = 1 V, I_c = 5 mA, Z_o = 50 Ω

| FREQUENCY MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|-------|--------|--------|-------|-------|------|-------|--------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100.00 | 0.790 | -37.9 | 12.042 | 152.3 | 0.043 | 67.5 | 0.886 | -23.5 |
| 200.00 | 0.672 | -69.2 | 9.515 | 129.2 | 0.079 | 54.7 | 0.708 | -42.2 |
| 300.00 | 0.564 | -91.9 | 7.780 | 113.6 | 0.101 | 51.0 | 0.562 | -55.7 |
| 400.00 | 0.475 | -108.5 | 3.993 | 103.8 | 0.115 | 49.2 | 0.456 | -61.2 |
| 500.00 | 0.415 | -123.8 | 4.959 | 97.3 | 0.124 | 48.6 | 0.374 | -63.8 |
| 600.00 | 0.383 | -137.1 | 4.268 | 92.1 | 0.135 | 49.0 | 0.329 | -64.4 |
| 700.00 | 0.366 | -147.8 | 3.741 | 86.2 | 0.146 | 48.6 | 0.289 | -69.8 |
| 800.00 | 0.331 | -138.3 | 3.313 | 81.3 | 0.156 | 47.4 | 0.235 | -73.5 |
| 900.00 | 0.332 | -166.3 | 2.927 | 77.3 | 0.168 | 50.2 | 0.202 | -75.2 |
| 1000.00 | 0.335 | -174.3 | 2.677 | 74.1 | 0.179 | 51.1 | 0.181 | -76.6 |
| 1100.00 | 0.337 | 177.3 | 2.431 | 70.7 | 0.188 | 50.8 | 0.175 | -81.8 |
| 1200.00 | 0.333 | 172.0 | 2.282 | 67.4 | 0.197 | 50.3 | 0.158 | -90.1 |
| 1300.00 | 0.365 | 166.3 | 2.124 | 63.6 | 0.208 | 49.5 | 0.134 | -95.4 |
| 1400.00 | 0.375 | 164.2 | 2.027 | 59.9 | 0.222 | 48.9 | 0.120 | -101.8 |
| 1500.00 | 0.378 | 158.6 | 1.944 | 55.4 | 0.240 | 48.1 | 0.114 | -106.3 |
| 1600.00 | 0.373 | 155.0 | 1.850 | 52.7 | 0.258 | 48.4 | 0.112 | -116.2 |
| 1700.00 | 0.387 | 150.8 | 1.764 | 50.6 | 0.269 | 49.5 | 0.107 | -128.3 |
| 1800.00 | 0.401 | 146.1 | 1.679 | 50.0 | 0.279 | 50.2 | 0.109 | -137.3 |
| 1900.00 | 0.418 | 143.8 | 1.603 | 48.2 | 0.286 | 50.1 | 0.114 | -144.5 |
| 2000.00 | 0.429 | 140.6 | 1.526 | 46.7 | 0.294 | 49.5 | 0.125 | -150.2 |

V_{CE} = 1 V, I_c = 7 mA, Z_o = 50 Ω

| FREQUENCY MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|-------|--------|--------|-------|-------|------|-------|--------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100.00 | 0.736 | -44.1 | 14.388 | 148.1 | 0.041 | 61.2 | 0.833 | -28.2 |
| 200.00 | 0.603 | -77.3 | 10.890 | 124.2 | 0.074 | 53.6 | 0.642 | -48.4 |
| 300.00 | 0.494 | -100.6 | 8.181 | 109.3 | 0.094 | 51.9 | 0.497 | -62.1 |
| 400.00 | 0.415 | -117.8 | 6.500 | 100.3 | 0.108 | 51.7 | 0.389 | -68.0 |
| 500.00 | 0.369 | -133.0 | 5.307 | 94.7 | 0.118 | 52.1 | 0.310 | -70.2 |
| 600.00 | 0.350 | -145.9 | 4.558 | 89.8 | 0.132 | 52.9 | 0.271 | -70.5 |
| 700.00 | 0.336 | -155.9 | 3.974 | 84.3 | 0.144 | 52.7 | 0.240 | -77.0 |
| 800.00 | 0.324 | -166.0 | 3.500 | 79.9 | 0.156 | 53.1 | 0.191 | -83.3 |
| 900.00 | 0.309 | -173.7 | 3.096 | 76.3 | 0.169 | 53.8 | 0.158 | -85.9 |
| 1000.00 | 0.314 | 178.7 | 2.819 | 73.3 | 0.183 | 54.2 | 0.141 | -87.1 |
| 1100.00 | 0.319 | 171.0 | 2.583 | 70.1 | 0.193 | 53.7 | 0.139 | -93.2 |
| 1200.00 | 0.335 | 166.5 | 2.407 | 66.9 | 0.204 | 52.9 | 0.128 | -104.6 |
| 1300.00 | 0.347 | 161.6 | 2.235 | 63.3 | 0.215 | 51.8 | 0.106 | -113.9 |
| 1400.00 | 0.336 | 159.6 | 2.137 | 59.8 | 0.231 | 50.8 | 0.093 | -123.2 |
| 1500.00 | 0.362 | 154.5 | 2.032 | 55.5 | 0.250 | 49.7 | 0.093 | -129.3 |
| 1600.00 | 0.359 | 151.2 | 1.932 | 52.9 | 0.268 | 49.5 | 0.098 | -140.1 |
| 1700.00 | 0.373 | 147.4 | 1.845 | 50.9 | 0.280 | 50.4 | 0.102 | -133.9 |
| 1800.00 | 0.388 | 143.2 | 1.756 | 50.5 | 0.291 | 50.7 | 0.110 | -161.6 |
| 1900.00 | 0.404 | 141.0 | 1.676 | 48.7 | 0.299 | 50.5 | 0.116 | -167.2 |
| 2000.00 | 0.415 | 138.1 | 1.597 | 47.5 | 0.307 | 49.6 | 0.130 | -170.3 |

V_{CE} = 1 V, I_c = 10 mA, Z_o = 50 Ω

| FREQUENCY MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|-------|--------|--------|-------|-------|------|-------|--------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100.00 | 0.676 | -49.5 | 16.485 | 144.1 | 0.041 | 59.8 | 0.808 | -31.3 |
| 200.00 | 0.545 | -83.0 | 11.960 | 120.0 | 0.071 | 53.3 | 0.588 | -53.4 |
| 300.00 | 0.442 | -108.8 | 8.726 | 105.9 | 0.090 | 53.3 | 0.443 | -67.7 |
| 400.00 | 0.372 | -126.4 | 6.820 | 97.6 | 0.103 | 54.1 | 0.339 | -73.9 |
| 500.00 | 0.339 | -141.2 | 5.333 | 92.6 | 0.116 | 54.9 | 0.263 | -76.2 |
| 600.00 | 0.328 | -153.6 | 4.754 | 88.1 | 0.130 | 33.9 | 0.229 | -76.4 |
| 700.00 | 0.318 | -162.8 | 4.124 | 82.9 | 0.143 | 55.4 | 0.205 | -84.2 |
| 800.00 | 0.309 | -172.4 | 3.626 | 78.7 | 0.157 | 55.7 | 0.162 | -93.2 |
| 900.00 | 0.295 | -179.8 | 3.201 | 75.3 | 0.171 | 56.3 | 0.131 | -97.4 |
| 1000.00 | 0.303 | 173.2 | 2.922 | 72.6 | 0.186 | 56.4 | 0.115 | -99.3 |
| 1100.00 | 0.310 | 166.1 | 2.674 | 69.6 | 0.198 | 55.7 | 0.118 | -105.7 |
| 1200.00 | 0.326 | 162.2 | 2.480 | 66.5 | 0.209 | 54.5 | 0.113 | -119.6 |
| 1300.00 | 0.336 | 157.7 | 2.312 | 63.1 | 0.221 | 53.1 | 0.096 | -132.9 |
| 1400.00 | 0.345 | 156.0 | 2.205 | 39.5 | 0.237 | 51.9 | 0.089 | -144.2 |
| 1500.00 | 0.333 | 151.3 | 2.100 | 55.5 | 0.257 | 50.6 | 0.091 | -151.0 |
| 1600.00 | 0.351 | 148.1 | 1.989 | 55.0 | 0.276 | 50.2 | 0.101 | -159.3 |
| 1700.00 | 0.360 | 144.8 | 1.904 | 51.0 | 0.230 | 50.9 | 0.111 | -171.4 |
| 1800.00 | 0.380 | 140.9 | 1.804 | 50.7 | 0.300 | 51.0 | 0.122 | -177.0 |
| 1900.00 | 0.396 | 139.0 | 1.724 | 49.0 | 0.307 | 50.7 | 0.129 | 178.5 |
| 2000.00 | 0.407 | 136.0 | 1.642 | 47.6 | 0.315 | 49.7 | 0.143 | 177.0 |

V_{CE} = 3 V, I_c = 1 mA, Z_o = 50 Ω

| FREQUENCY MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|-------|--------|-------|-------|-------|------|-------|-------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100.00 | 1.003 | -16.7 | 3.418 | 166.9 | 0.029 | 74.7 | 0.989 | -3.6 |
| 200.00 | 0.956 | -32.7 | 3.121 | 154.7 | 0.078 | 64.7 | 0.951 | -14.1 |
| 300.00 | 0.938 | -48.4 | 3.082 | 141.4 | 0.113 | 60.2 | 0.897 | -21.7 |
| 400.00 | 0.895 | -61.8 | 2.931 | 129.6 | 0.138 | 53.4 | 0.857 | -26.1 |
| 500.00 | 0.793 | -75.1 | 2.631 | 120.5 | 0.130 | 46.1 | 0.811 | -30.5 |
| 600.00 | 0.700 | -83.7 | 2.365 | 114.3 | 0.160 | 42.9 | 0.774 | -31.5 |
| 700.00 | 0.671 | -96.0 | 2.189 | 106.3 | 0.171 | 38.2 | 0.735 | -35.8 |
| 800.00 | 0.629 | -108.8 | 1.997 | 98.9 | 0.172 | 34.9 | 0.665 | -35.9 |
| 900.00 | 0.581 | -117.9 | 1.837 | 92.0 | 0.172 | 33.9 | 0.636 | -38.4 |
| 1000.00 | 0.554 | -127.4 | 1.706 | 87.7 | 0.170 | 33.3 | 0.590 | -39.3 |
| 1100.00 | 0.535 | -135.4 | 1.570 | 82.7 | 0.167 | 31.4 | 0.579 | -43.2 |
| 1200.00 | 0.531 | -145.8 | 1.510 | 78.0 | 0.162 | 30.6 | 0.541 | -47.1 |
| 1300.00 | 0.540 | -156.4 | 1.359 | 74.3 | 0.162 | 30.5 | 0.522 | -48.3 |
| 1400.00 | 0.542 | -161.9 | 1.299 | 71.7 | 0.162 | 32.5 | 0.510 | -51.5 |
| 1500.00 | 0.527 | -168.3 | 1.278 | 62.8 | 0.166 | 33.5 | 0.509 | -52.6 |
| 1600.00 | 0.497 | -174.3 | 1.272 | 58.3 | 0.169 | 37.6 | 0.493 | -56.2 |
| 1700.00 | 0.512 | 178.3 | 1.216 | 55.8 | 0.169 | 41.3 | 0.476 | -58.1 |
| 1800.00 | 0.492 | 170.4 | 1.209 | 54.2 | 0.171 | 46.9 | 0.469 | -62.0 |
| 1900.00 | 0.524 | 165.5 | 1.119 | 52.2 | 0.176 | 49.9 | 0.454 | -66.3 |
| 2000.00 | 0.534 | 159.9 | 1.069 | 50.4 | 0.180 | 33.4 | 0.454 | -69.3 |

V_{CE} = 3 V, I_c = 3 mA, Z_O = 50 Ω

| FREQUENCY MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|-------|--------|-------|-------|-------|------|-------|-------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100.00 | 0.924 | -23.0 | 8.393 | 160.8 | 0.031 | 54.9 | 0.965 | -10.7 |
| 200.00 | 0.830 | -46.1 | 7.259 | 143.7 | 0.070 | 59.2 | 0.964 | -24.0 |
| 300.00 | 0.750 | -65.0 | 6.624 | 128.1 | 0.096 | 55.7 | 0.760 | -34.3 |
| 400.00 | 0.653 | -79.4 | 3.805 | 116.8 | 0.111 | 51.5 | 0.671 | -38.9 |
| 500.00 | 0.548 | -93.1 | 4.720 | 108.8 | 0.119 | 48.5 | 0.599 | -41.3 |
| 600.00 | 0.471 | -104.2 | 4.121 | 103.1 | 0.127 | 47.9 | 0.555 | -41.1 |
| 700.00 | 0.433 | -116.2 | 3.695 | 96.4 | 0.136 | 46.5 | 0.509 | -44.9 |
| 800.00 | 0.397 | -128.3 | 3.302 | 90.5 | 0.141 | 46.3 | 0.441 | -44.6 |
| 900.00 | 0.361 | -136.7 | 2.944 | 85.5 | 0.147 | 47.4 | 0.409 | -43.0 |
| 1000.00 | 0.345 | -146.1 | 2.696 | 82.0 | 0.153 | 48.6 | 0.378 | -44.9 |
| 1100.00 | 0.332 | -155.5 | 2.479 | 77.9 | 0.158 | 48.6 | 0.368 | -48.3 |
| 1200.00 | 0.336 | -164.1 | 2.328 | 74.3 | 0.163 | 48.8 | 0.338 | -52.4 |
| 1300.00 | 0.346 | -172.7 | 2.158 | 70.3 | 0.170 | 48.7 | 0.314 | -52.7 |
| 1400.00 | 0.332 | -177.1 | 2.063 | 67.1 | 0.180 | 49.3 | 0.300 | -54.5 |
| 1500.00 | 0.347 | 176.5 | 1.997 | 61.8 | 0.194 | 49.2 | 0.294 | -55.3 |
| 1600.00 | 0.338 | 171.8 | 1.906 | 58.4 | 0.207 | 50.6 | 0.282 | -58.8 |
| 1700.00 | 0.349 | 165.6 | 1.818 | 56.0 | 0.216 | 52.3 | 0.262 | -60.8 |
| 1800.00 | 0.355 | 139.2 | 1.740 | 55.1 | 0.225 | 54.4 | 0.251 | -64.3 |
| 1900.00 | 0.373 | 155.6 | 1.650 | 53.2 | 0.233 | 53.1 | 0.241 | -68.3 |
| 2000.00 | 0.387 | 131.2 | 1.376 | 31.6 | 0.240 | 55.5 | 0.239 | -72.5 |

V_{CE} = 3 V, I_c = 5 mA, Z_O = 50 Ω

| FREQUENCY MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|-------|--------|--------|-------|-------|------|-------|-------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100.00 | 0.865 | -27.8 | 11.588 | 156.9 | 0.036 | 49.9 | 0.938 | -13.2 |
| 200.00 | 0.742 | -53.4 | 9.364 | 137.4 | 0.066 | 58.5 | 0.805 | -29.3 |
| 300.00 | 0.637 | -73.2 | 8.312 | 121.7 | 0.086 | 53.0 | 0.675 | -40.3 |
| 400.00 | 0.531 | -87.6 | 6.607 | 110.7 | 0.100 | 53.2 | 0.576 | -44.3 |
| 500.00 | 0.438 | -101.3 | 5.519 | 103.7 | 0.109 | 52.0 | 0.500 | -45.6 |
| 600.00 | 0.376 | -113.3 | 4.799 | 98.6 | 0.118 | 52.5 | 0.461 | -44.5 |
| 700.00 | 0.343 | -125.0 | 4.262 | 92.5 | 0.128 | 52.0 | 0.418 | -48.1 |
| 800.00 | 0.315 | -136.9 | 3.784 | 87.3 | 0.135 | 52.5 | 0.357 | -47.9 |
| 900.00 | 0.286 | -145.5 | 3.354 | 83.0 | 0.143 | 53.5 | 0.325 | -47.4 |
| 1000.00 | 0.276 | -154.9 | 3.048 | 79.8 | 0.154 | 54.4 | 0.301 | -46.6 |
| 1100.00 | 0.268 | -164.6 | 2.812 | 76.3 | 0.163 | 54.4 | 0.294 | -50.1 |
| 1200.00 | 0.276 | -172.4 | 2.613 | 73.0 | 0.170 | 54.2 | 0.267 | -54.7 |
| 1300.00 | 0.286 | 179.9 | 2.441 | 69.4 | 0.180 | 53.6 | 0.243 | -54.8 |
| 1400.00 | 0.293 | 173.9 | 2.321 | 63.9 | 0.192 | 53.4 | 0.228 | -56.1 |
| 1500.00 | 0.294 | 169.9 | 2.232 | 61.4 | 0.207 | 52.8 | 0.222 | -57.0 |
| 1600.00 | 0.290 | 165.5 | 2.123 | 58.3 | 0.223 | 53.4 | 0.211 | -61.0 |
| 1700.00 | 0.303 | 160.1 | 2.030 | 56.3 | 0.234 | 54.4 | 0.191 | -63.5 |
| 1800.00 | 0.313 | 154.3 | 1.932 | 53.6 | 0.244 | 55.8 | 0.179 | -67.5 |
| 1900.00 | 0.330 | 151.2 | 1.836 | 53.8 | 0.252 | 56.0 | 0.171 | -71.9 |
| 2000.00 | 0.341 | 147.2 | 1.757 | 52.4 | 0.259 | 55.8 | 0.168 | -77.4 |

V_{CE} = 3 V, I_c = 7 mA, Z_O = 50 Ω

| FREQUENCY MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|-------|--------|--------|-------|-------|------|-------|-------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100.00 | 0.811 | -32.6 | 14.032 | 153.7 | 0.027 | 57.0 | 0.922 | -18.2 |
| 200.00 | 0.668 | -59.1 | 11.239 | 132.2 | 0.063 | 56.7 | 0.752 | -33.9 |
| 300.00 | 0.553 | -79.0 | 8.969 | 116.7 | 0.081 | 55.4 | 0.611 | -44.6 |
| 400.00 | 0.449 | -93.3 | 7.293 | 106.9 | 0.094 | 55.4 | 0.510 | -47.9 |
| 500.00 | 0.370 | -107.1 | 6.039 | 100.6 | 0.103 | 55.3 | 0.435 | -48.1 |
| 600.00 | 0.318 | -119.6 | 5.212 | 93.8 | 0.114 | 56.2 | 0.400 | -46.5 |
| 700.00 | 0.290 | -131.1 | 4.581 | 90.2 | 0.125 | 55.8 | 0.364 | -50.1 |
| 800.00 | 0.268 | -142.9 | 4.057 | 85.5 | 0.134 | 56.2 | 0.305 | -50.1 |
| 900.00 | 0.244 | -151.8 | 3.587 | 81.6 | 0.145 | 57.1 | 0.275 | -49.0 |
| 1000.00 | 0.237 | -161.2 | 3.266 | 78.6 | 0.157 | 57.6 | 0.255 | -47.7 |
| 1100.00 | 0.233 | -170.9 | 3.003 | 75.4 | 0.167 | 57.5 | 0.249 | -51.5 |
| 1200.00 | 0.243 | -178.1 | 2.794 | 72.3 | 0.173 | 57.0 | 0.225 | -56.7 |
| 1300.00 | 0.253 | 174.8 | 2.596 | 68.9 | 0.186 | 56.1 | 0.199 | -56.7 |
| 1400.00 | 0.261 | 171.0 | 2.474 | 65.4 | 0.199 | 55.4 | 0.185 | -37.7 |
| 1500.00 | 0.265 | 165.4 | 2.365 | 61.3 | 0.216 | 54.6 | 0.179 | -38.7 |
| 1600.00 | 0.265 | 161.2 | 2.253 | 58.4 | 0.232 | 54.7 | 0.169 | -63.3 |
| 1700.00 | 0.277 | 156.4 | 2.153 | 56.5 | 0.245 | 55.5 | 0.149 | -66.8 |
| 1800.00 | 0.290 | 151.1 | 2.046 | 56.9 | 0.233 | 56.4 | 0.137 | -71.3 |
| 1900.00 | 0.306 | 148.3 | 1.943 | 54.2 | 0.264 | 56.4 | 0.130 | -76.7 |
| 2000.00 | 0.318 | 144.6 | 1.856 | 52.8 | 0.271 | 53.9 | 0.128 | -83.6 |

V_{CE} = 3 V, I_c = 10 mA, Z_o = 50 Ω

| FREQUENCY MHz | S11 | | S21 | | S12 | | S22 | |
|------------------|-------|--------|--------|-------|-------|------|-------|-------|
| | MAG | ANG | MAG | ANG | MAG | ANG | MAG | ANG |
| 100.00 | 0.775 | -34.3 | 16.213 | 130.4 | 0.031 | 42.4 | 0.916 | -18.1 |
| 200.00 | 0.609 | -63.8 | 12.257 | 128.4 | 0.037 | 55.3 | 0.712 | -37.2 |
| 300.00 | 0.488 | -83.7 | 9.683 | 115.4 | 0.077 | 56.3 | 0.569 | -47.6 |
| 400.00 | 0.390 | -98.0 | 7.790 | 104.3 | 0.091 | 56.6 | 0.467 | -30.5 |
| 500.00 | 0.321 | -111.7 | 6.396 | 98.4 | 0.101 | 57.6 | 0.394 | -50.4 |
| 600.00 | 0.277 | -124.8 | 5.493 | 93.8 | 0.113 | 58.5 | 0.362 | -48.1 |
| 700.00 | 0.253 | -136.0 | 4.808 | 88.6 | 0.125 | 58.4 | 0.329 | -51.9 |
| 800.00 | 0.236 | -147.8 | 4.252 | 84.3 | 0.135 | 58.4 | 0.273 | -52.2 |
| 900.00 | 0.216 | -157.0 | 3.752 | 80.7 | 0.147 | 59.1 | 0.242 | -50.9 |
| 1000.00 | 0.212 | -166.4 | 3.408 | 77.8 | 0.160 | 59.6 | 0.224 | -49.1 |
| 1100.00 | 0.221 | -176.0 | 3.131 | 74.8 | 0.171 | 59.2 | 0.220 | -53.1 |
| 1200.00 | 0.221 | 177.3 | 2.909 | 71.9 | 0.180 | 58.5 | 0.197 | -59.1 |
| 1300.00 | 0.232 | 170.6 | 2.711 | 68.6 | 0.191 | 57.3 | 0.171 | -59.2 |
| 1400.00 | 0.240 | 167.1 | 2.581 | 65.2 | 0.205 | 56.3 | 0.157 | -60.1 |
| 1500.00 | 0.247 | 161.8 | 2.457 | 61.2 | 0.222 | 55.2 | 0.150 | -61.2 |
| 1600.00 | 0.248 | 158.0 | 2.335 | 58.5 | 0.239 | 55.2 | 0.141 | -66.8 |
| 1700.00 | 0.261 | 153.6 | 2.236 | 56.6 | 0.252 | 53.8 | 0.121 | -71.4 |
| 1800.00 | 0.275 | 148.5 | 2.120 | 56.2 | 0.263 | 56.5 | 0.101 | -77.2 |
| 1900.00 | 0.291 | 146.1 | 2.019 | 54.6 | 0.272 | 56.4 | 0.104 | -83.3 |
| 2000.00 | 0.302 | 142.6 | 1.923 | 53.2 | 0.279 | 56.8 | 0.104 | -91.6 |

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.