



Chip Inductors – 1008HQ Series (2520)

- Highest Q factors of any Coilcraft chip this body size, roughly 20% higher than our popular 1008CS and HS parts.
- Exceptional SRFs, tight tolerance and batch consistency

Coilcraft **Designer's Kit C323** contains samples of all 5% inductance tolerance parts. Kits with 2% tolerance are also available. To order, contact Coilcraft or purchase on-line at <http://order.coilcraft.com>.

Part number ¹	Inductance ³ (nH)	Percent tolerance ⁴	Q min ⁵	SRF min ⁶ (GHz)	DCR max ⁷ (Ohms)	Irms ⁸ (A)
1008HQ-3N0X_L_2	3.0 @ 50 MHz	5	70 @ 1500 MHz	8.10	0.04	1.6
1008HQ-4N1X_L_	4.1 @ 50 MHz	5	75 @ 1500 MHz	6.20	0.05	1.6
1008HQ-7N8X_L_2	7.8 @ 50 MHz	5	75 @ 500 MHz	3.80	0.05	1.6
1008HQ-10NX_L_	10 @ 50 MHz	5,2	60 @ 500 MHz	3.60	0.06	1.6
1008HQ-12NX_L_	12 @ 50 MHz	5,2	70 @ 500 MHz	2.80	0.06	1.5
1008HQ-18NX_L_	18 @ 50 MHz	5,2,1	62 @ 350 MHz	2.70	0.07	1.4
1008HQ-22NX_L_	22 @ 50 MHz	5,2	62 @ 350 MHz	2.05	0.07	1.4
1008HQ-33NX_L_	33 @ 50 MHz	5,2	75 @ 350 MHz	1.70	0.09	1.3
1008HQ-36NX_L_	36 @ 50 MHz	5,2	65 @ 350 MHz	1.40	0.09	1.3
1008HQ-39NX_L_	39 @ 50 MHz	5,2	75 @ 350 MHz	1.30	0.09	1.3
1008HQ-47NX_L_	47 @ 50 MHz	5,2,1	75 @ 350 MHz	1.45	0.12	1.2
1008HQ-56NX_L_	56 @ 50 MHz	5,2,1	75 @ 350 MHz	1.23	0.12	1.2
1008HQ-68NX_L_	68 @ 50 MHz	5,2,1	80 @ 350 MHz	1.15	0.13	1.1
1008HQ-82NX_L_	82 @ 50 MHz	5,2	80 @ 350 MHz	1.06	0.16	1.1
1008HQ-R10X_L_	100 @ 50 MHz	5,2	62 @ 350 MHz	0.82	0.16	1.0

1. When ordering, specify **tolerance, termination and packaging** codes:

1008HQ-R10X **G L C**

Tolerance: F = 1% G = 2% J = 5%

(Table shows stock tolerances in bold.)

Termination: L = RoHS compliant silver-palladium-platinum-glass frit. Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (2000 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape Factory order only, not stocked (7500 parts per full reel).

- Part is wound on low profile coilform.
 - Inductance measured using a Coilcraft SMD-A fixture in an Agilent/HP 4286A impedance analyzer with Coilcraft-provided correlation pieces.
 - Tolerances in bold are stocked for immediate shipment.
 - Q measured using an Agilent/HP 4291A with an Agilent/HP 16193 test fixture.
 - For SRF less than 6 GHz, measured using an Agilent/HP 8753D network analyzer and a Coilcraft SMD-D test fixture. For SRF greater than 6 GHz, measured using an Agilent/HP 8722ES network analyzer and a Coilcraft SMD-D test fixture.
 - DCR measured on a Cambridge Technology micro-ohmmeter and a Coilcraft CCF840 test fixture.
 - Electrical specifications at 25°C.
 - Temperature coefficient of inductance: +25 to +125 ppm/°C. See Color Coding section for part marking data.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Core material Ceramic

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 32.4 – 35.7 mg; 17.1 – 17.7 mg (Low profile parts)

Ambient temperature –40°C to +125°C with I_{rms} current, +125°C to +140°C with derated current

Storage temperature Component: –40°C to +140°C. Packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +125 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

One per billion hours / one billion hours, calculated per Telcordia SR-332

Packaging 2000/7" reel; 7500/13" reel

Standard height parts: Plastic tape: 8 mm wide, 0.23 mm thick, 4 mm pocket spacing, 1.8 mm pocket depth

Low profile parts: Plastic tape: 8 mm wide, 0.3 mm thick, 4 mm pocket spacing, 1.6 mm pocket depth

PCB washing Only pure water or alcohol recommended

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 190-1 Revised 07/17/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469


E-mail info@coilcraft.com Web <http://www.coilcraft.com>




Chip Inductors – 1008HQ Series (2520)

S-Parameter files
ON OUR WEB SITE OR CD
SPICE models
ON OUR WEB SITE OR CD



Typical Q vs Frequency

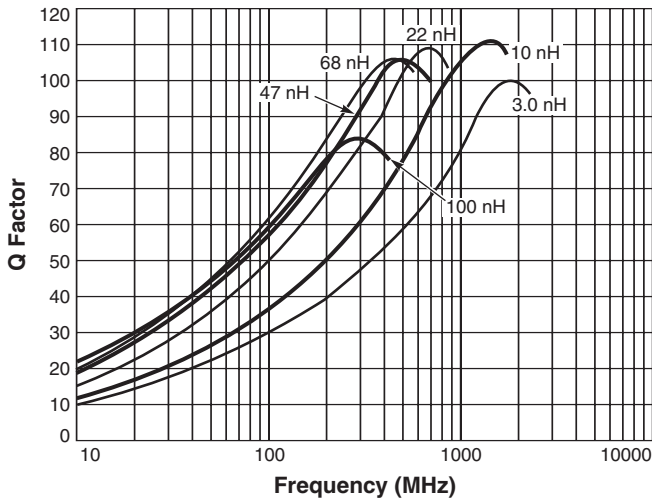

Typical L vs Frequency

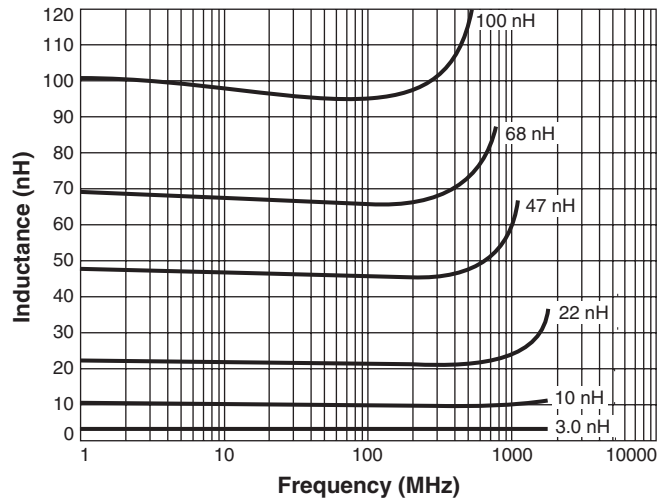

Irms Derating

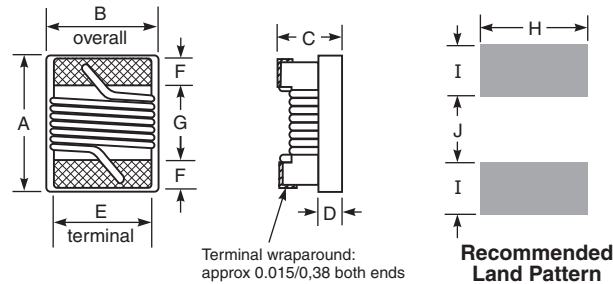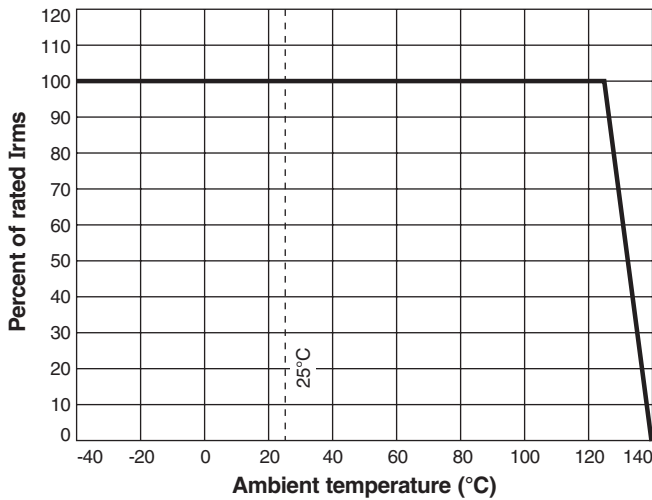

A	B	C	D	E	F	G	H	I	J
max	max	max*	ref						
0.115	0.110	0.080	0.020	0.080	0.020	0.060	0.100	0.040	0.050
2,92	2,79	2,03	0,51	2,03	0,51	1,52	2,54	1,02	1,27

*Low profile parts: 0.050/1,27



Specifications subject to change without notice.
Please check our website for latest information.

Document 190-2 Revised 07/17/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web http://www.coilcraft.com

© Coilcraft, Inc. 2009